


LABEL PLACED ON INSIDE WALL OF CABINET.



| CATALOG NO | VOLTAGE | NEC MOTOR HP | NEC MOTOR CURRENT | WATTS LOSS | APPROX. WEIGHT-LBS |
|--------------|---------|--------------|-------------------|------------|--------------------|
| KDRULH1LE3R | 480 | 150 | 180 | 299 | 116 |
| KDRULH22LE3R | 208/240 | 60 | 169 | 209 | 116 |

NEC MOTOR CURRENTS SHOWN IN THE 208/240 VOLT CHART ARE BASED ON HORSEPOWER AT 208 VOLT. 575/600 VOLT CHART USE THE 575 VOLT CURRENT RATING.

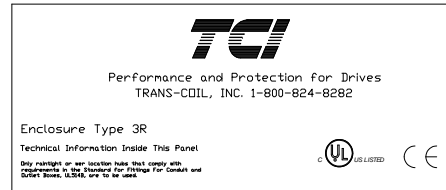

LABEL PLACED ON FRONT OF CABINET.

LUG WIRE RANGE 250MCM-6, AL OR CU.
FOR REACTOR.
TIGHTENING TORQUE. 275 LB-IN

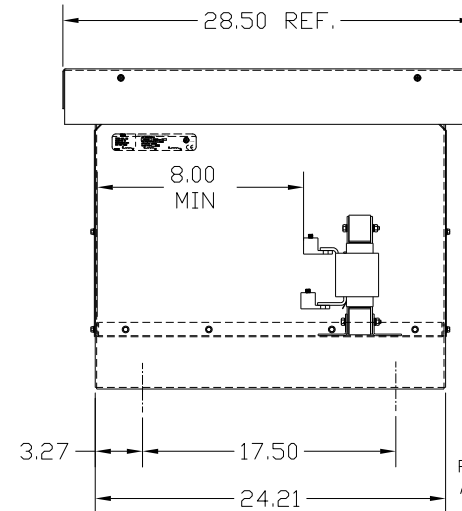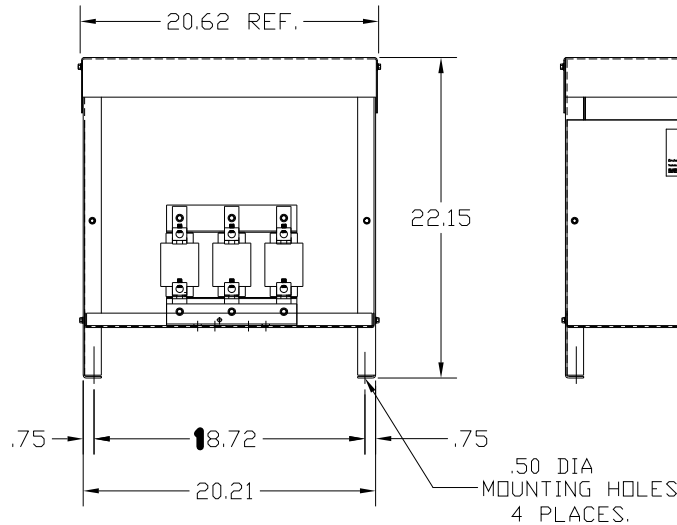

VENDOR LILLY POWDER COATINGS, INC.
PRODUCT CODE 312E
COLOR PEBBLE GRAY
POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R AND APPLIED PER A UL ACCEPTED DTW2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL LOCAL AND NATIONAL CODES

| TOLERANCES (EXCEPT AS NOTED) | | | | 7878 N. 86th STREET MILWAUKEE, WI 53224 |
|------------------------------|----------|------|----|--|
| DECIMAL | | | | |
| .XX ± .03 | | | | |
| .XXX ± .01 | | | | |
| FRACTIONAL | | | | |
| ± 1/32 | | | | |
| ANGULAR | | | | |
| ± 1/2° | | | | |
| NO | REVISION | DATE | BY | DRN BY DSW DATE 09/20/04 DWG. NO. D KDRHE3R-2DG SCALE TO FIT APRVD. SHT. 1 of 1 |