
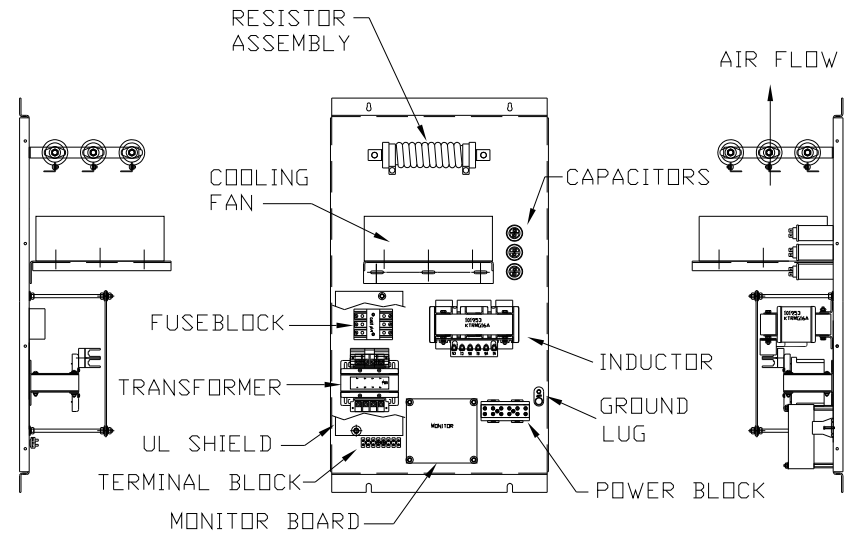


GROUND LUG  
WIRE RANGE: 1/0-14 AWG  
TORQUE: 200 LB-IN

LINE CONNECTIONS  
WIRE RANGE: 1 AWG THRU 4 AWG 35 IN-LB MAX.  
6 AWG THRU 14 AWG 30 IN-LB MAX.  
16 AWG THRU 22 AWG 25 IN-LB MAX.

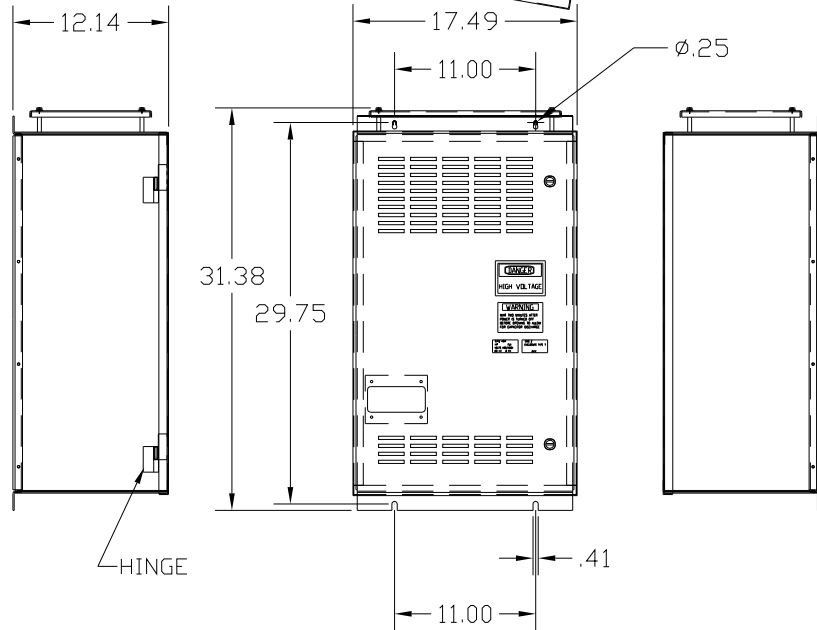

FOR SCHEMATIC SEE DRAWING P/N 24281-1

CUSTOMER IS RESPONSIBLE FOR PROPER  
INSTALLATION OF ASSEMBLY IN ACCORDANCE  
WITH LOCAL AND NATIONAL CODES.

CAT# KMG16AE01

CAT# KMG16AE01  
HP 10 FLA 16  
VOLTS 460/480V  
60 HZ 3 PH

DWG # 101959DG  
ENCLOSURE TYPE 1  
DATE

				TOLERANCES (EXCEPT AS NOTED)		<b>TCI</b> 7878 N. 86th STREET MILWAUKEE, WI 53224		
				DECIMAL				
				.XX ± .01		SINEWAVE FILTER-ENCLOSED 10 HP, 16 AMP, 480 V.		
				.XXX ± .005				
				FRACTIONAL ± 1/32				
				ANGULAR ± 1/2°		DRN BY RJC	DATE 1/6/03	DWG. NO. 101959DG
NO	REVISION	DATE	BY			SCALE --	APRVD. B	SHT. 1 OF 1