
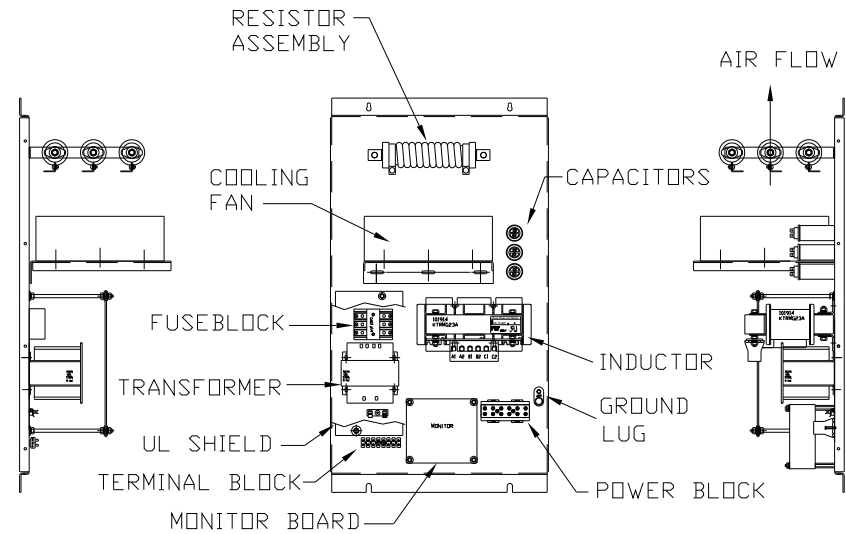


GROUND LUG  
WIRE RANGE: 1/0-14 AWG  
TORQUE: 200 LB-IN

LINE CONNECTIONS  
WIRE RANGE: 1 AWG THRU 4 AWG 35 IN-LB MAX.  
6 AWG THRU 14 AWG 30 IN-LB MAX.  
16 AWG THRU 22 AWG 25 IN-LB MAX.

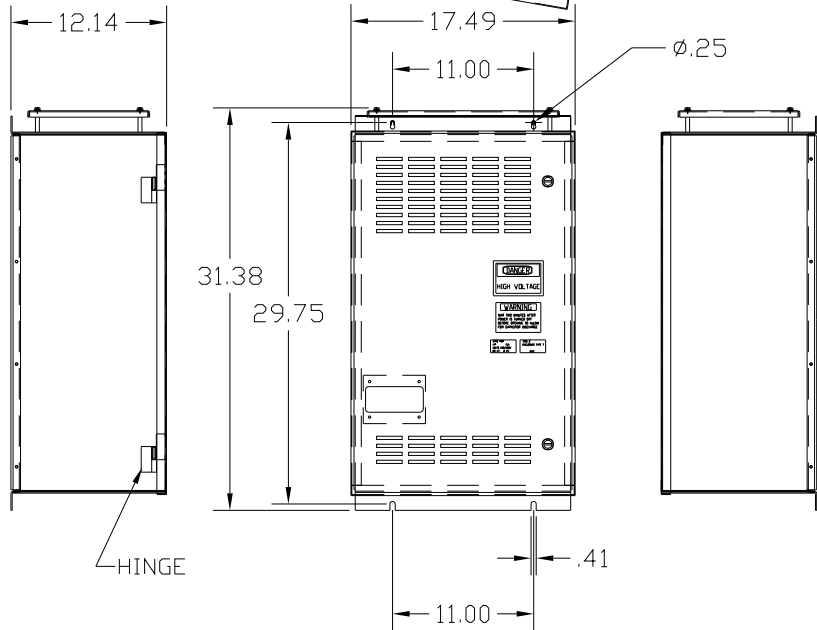


FOR SCHEMATIC SEE DRAWING P/N 24281-11

CAT# KMG20CE01  
HP 15 FLA 20  
VOLTS 575/600 V  
60 HZ 3 PH

DWG # 102004DG  
ENCLOSURE TYPE 1  
DATE

CUSTOMER IS RESPONSIBLE FOR PROPER  
INSTALLATION OF ASSEMBLY IN ACCORDANCE  
WITH LOCAL AND NATIONAL CODES.

CAT# KMG20CE01

				TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224  <b>SINEWAVE FILTER-ENCLOSED</b> 15 HP, 20 AMP, 600 V.	DRN BY	DATE	DWG. NO.	
				DECIMAL		SCALE	RJC	1/20/03	B 102004DG
				.XX ± .01 .XXX ± .005					
				FRACTIONAL ± 1/32					
NO	REVISION	DATE	BY	ANGULAR ± 1/2°			APRVD.	SHT. 1 OF 1	