
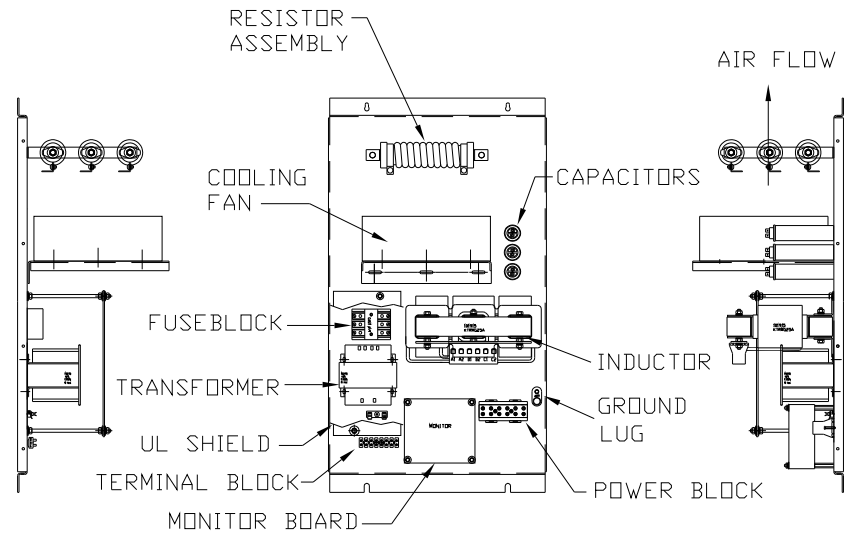


REMOVABLE DOOR,
SIDE PLATES,
VENTED TOP AND
UNVENTED BOTTOM PANEL

GROUND LUG
WIRE RANGE: 1/0-14 AWG
TORQUE: 200 LB-IN

LINE CONNECTIONS
WIRE RANGE: 1 AWG THRU 4 AWG 35 IN-LB MAX.
6 AWG THRU 14 AWG 30 IN-LB MAX
16 AWG THRU 22 AWG 25 IN-LB MAX.

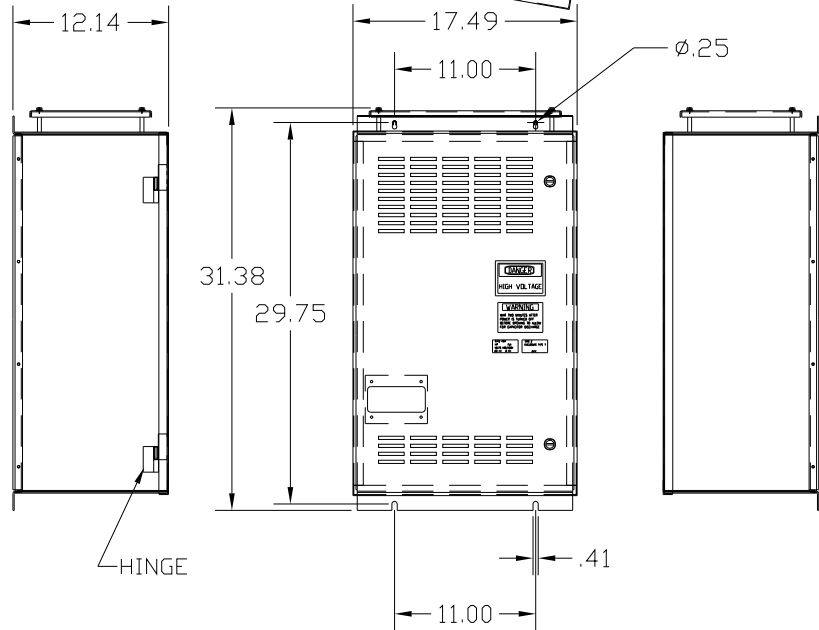


FOR SCHEMATIC SEE DRAWING P/N 24281-12

CAT# KMG25CE01
HP 20 FLA 25
VOLTS 575/600 V
60 HZ 3 PH

DWG # 102005DG
ENCLOSURE TYPE 1
DATE

CUSTOMER IS RESPONSIBLE FOR PROPER
INSTALLATION OF ASSEMBLY IN ACCORDANCE
WITH LOCAL AND NATIONAL CODES.

CAT# KMG25CE01

				TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224
				DECIMAL	
				.XX ± .01 .XXX ± .005	
				FRACTIONAL ± 1/32	
				ANGULAR ± 1/2°	DRN BY RJC
NO	REVISION	DATE	BY		DATE 1/26/03
				SCALE --	APRVD.
					DWG. NO. B 102005DG
					SHT. 1 OF 1