
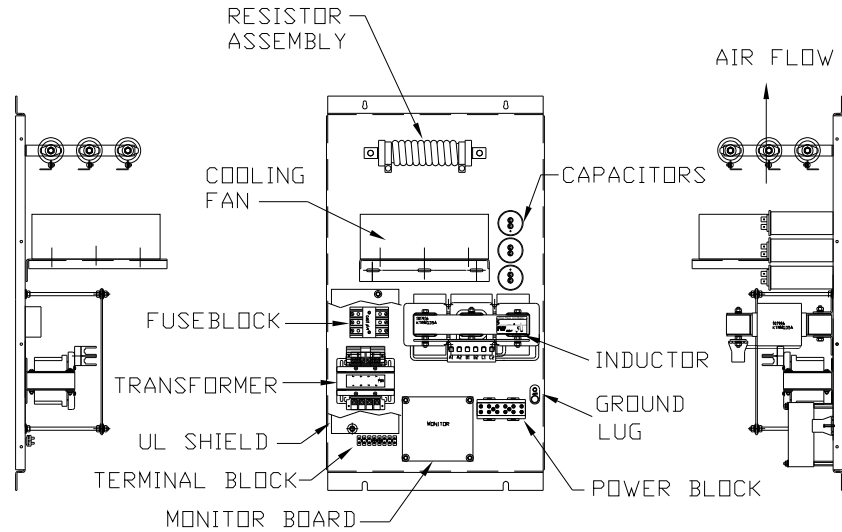


REMOVABLE DOOR,
SIDE PLATES,
VENTED TOP AND
UNVENTED BOTTOM PANEL

GROUND LUG
WIRE RANGE: 1/0-14 AWG
TORQUE: 200 LB-IN

LINE CONNECTIONS
WIRE RANGE: 1 AWG THRU 4 AWG 35 IN-LB MAX.
6 AWG THRU 14 AWG 30 IN-LB MAX
16 AWG THRU 22 AWG 25 IN-LB MAX.

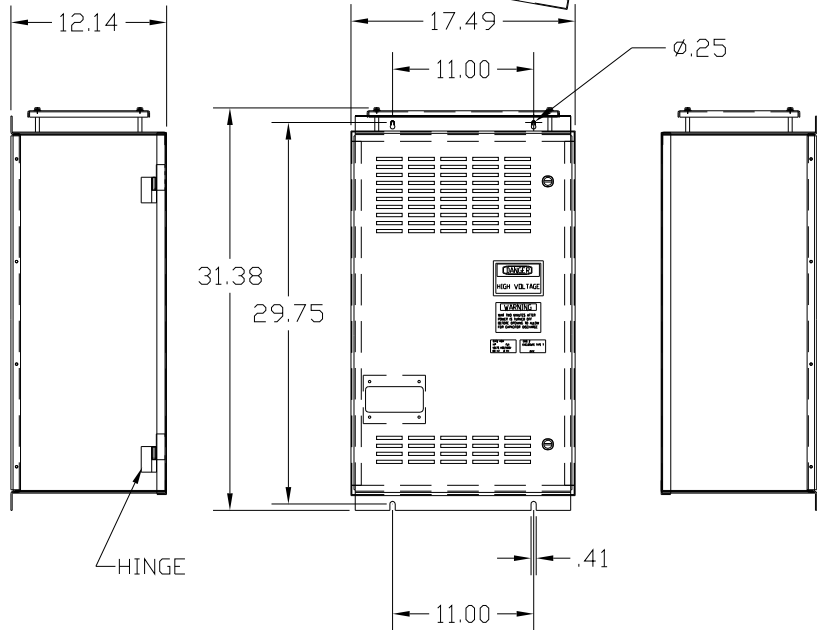

FOR SCHEMATIC SEE DRAWING P/N 24281-2

CUSTOMER IS RESPONSIBLE FOR PROPER
INSTALLATION OF ASSEMBLY IN ACCORDANCE
WITH LOCAL AND NATIONAL CODES.

CAT# KMG35AE01
HP 25 FLA 35
VOLTS 460/480V
60 HZ 3 PH

DWG # 101962DG
ENCLOSURE TYPE 1
DATE

CAT# KMG35AE01

				TOLERANCES (EXCEPT AS NOTED)		7878 N. 86th STREET MILWAUKEE, WI 53224		
				DECIMAL				
				.XX ± .01		SINEWAVE FILTER-ENCLOSED 25 HP, 35 AMP, 480 V.		
				.XXX ± .005				
				FRACTIONAL ± 1/32				
				ANGULAR ± 1/2°		DRN BY	DATE	DWG. NO.
NO	REVISION	DATE	BY			RJC	1/6/03	B 101962DG
						SCALE	APRVD.	SHT. 1 of 1