
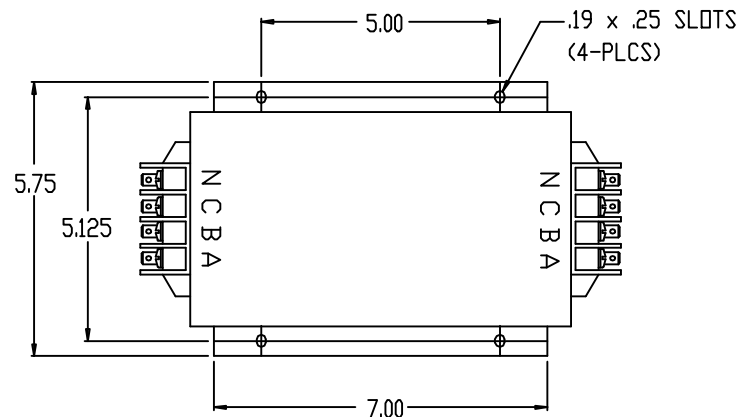


50 Ω INSERTION LOSS

COMMON MODE		DIFFERENTIAL MODE	
mHz	min. I.L. (dB)	mHz	min. I.L. (dB)
.01		.01	
.05		.05	
.15	60	.15	5
0.5	60	0.5	5
1.0	80	1.0	30
5.0	70	5.0	50
10	60	10	40
30	45	30	30
100		100	

ELECTRICAL SCHEMATIC

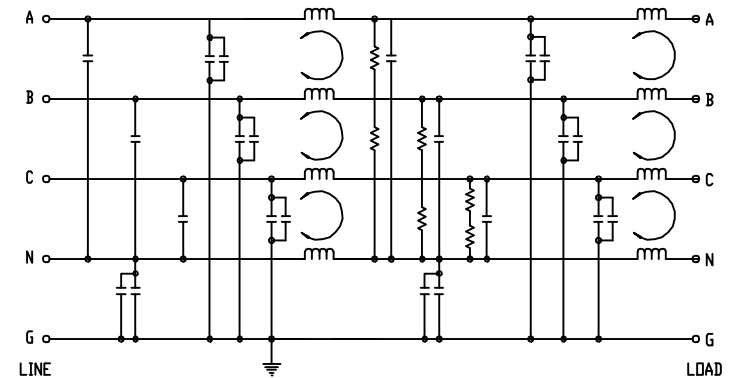

UNLESS OTHERWISE SPECIFIED:


- ALL CAPACITORS .1μF
- ALL INDUCTORS 1.0mH
- ALL RESISTORS 20mW

WEIGHT: 7 LBS
 POWER DISSIPATION @ RATED CURRENT: 10.0W MAX
 AGENCIES: UL RECOGNIZED UNDER UL 1283


MAX LEAKAGE CURRENT EACH LINE TO GROUND
 4X6mA AT 250VAC 60Hz
 8X6mA AT 600VAC 60Hz

HI-POT(1 MIN)	HI-POT(1 MIN)
L/G 3150VDC	A-B, A-C, A-N, A-G
	B-C, B-N, B-G
L/L 3150VDC	C-N, C-G, N-G (10 TESTS)

RATED VOLTAGE: 600VAC MAX, 50-60Hz (3-PHASE WYE OR DELTA)
 RATED CURRENT AT: 600VAC, 25A
 MAX OPERATING AMBIENT TEMPERATURE AT RATED CURRENT: 40°C
 HUMIDITY RANGE: 0-95% R.H.
 INSULATION RESISTANCE: 1000 MEGOHMS MIN AT 250VDC



TERMINALS:
 A,B,C,N: .25 QUICK CONNECT
 G: 8-32 SCREW

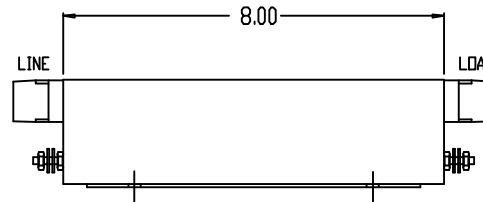

		TOLERANCES (EXCEPT AS NOTED)		7878 N. 86th STREET MILWAUKEE, WI 53224	
		DECIMAL			
		.XX ± .03		FILTER SPECIFICATION KRF25CTB	
		.XXX ± .010			
		FRACTIONAL			
		± 1/16		DRN BY: BW DATE: 07-20-98 SCALE: 1/2"=1" APPR: C	
SEE ECD #1792		7-15-99	BW	DWG. NO. 100284DG SHT. 1 OF 1	
NO	REVISION	DATE	BY		
				ANGLAR: ± 1/2°	