

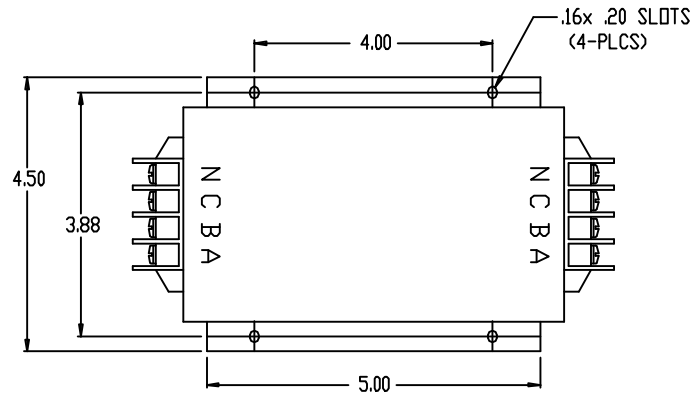



50 Ω INSERTION LOSS

COMMON MODE		DIFFERENTIAL MODE	
mHz	min. I.L. (dB)	mHz	min. I.L. (dB)
.01		.01	
.05		.05	
.15	50	.15	5
0.5	70	0.5	5
1.0	80	1.0	35
5.0	70	5.0	40
10	60	10	40
30	45	30	40
100		100	

ELECTRICAL SCHEMATIC

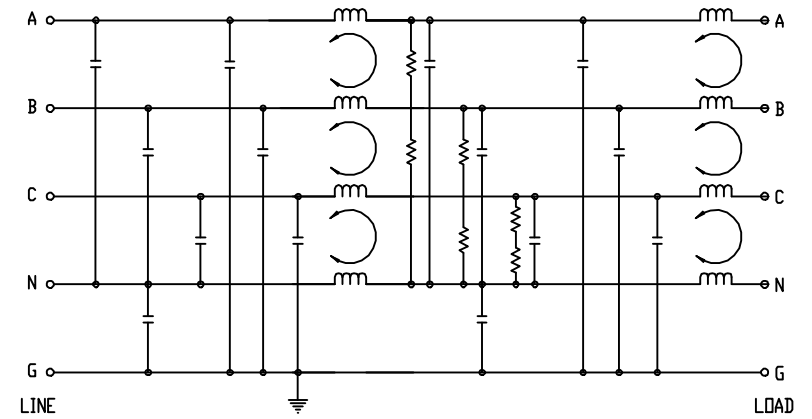

TERMINALS:  
A,B,C,N: 10-32 SCREW  
G: 8-32 SCREW

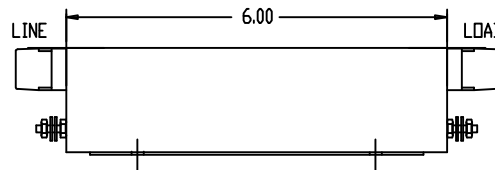

WEIGHT: 4 LBS  
POWER DISSIPATION @ RATED CURRENT: 7.5W MAX  
AGENCIES: UL RECOGNIZED UNDER UL 1283

MAX LEAKAGE CURRENT EACH LINE TO GROUND  
2X6mA AT 250VAC 60Hz  
4X6mA AT 600VAC 60Hz

HI-POT(1 MIN)  
L/G 3150VDC  
L/L 3150VDC

HI-POT(1 MIN)  
A-B, A-C, A-N, A-G  
B-C, B-N, B-G  
C-N, C-G, N-G (10 TESTS)

RATED VOLTAGE: 600VAC MAX, 50-60Hz (3-PHASE WYE OR DELTA)  
RATED CURRENT AT: 600VAC, 16A  
MAX OPERATING AMBIENT TEMPERATURE AT RATED CURRENT: 40°C  
HUMIDITY RANGE: 0-95% R.H.  
INSULATION RESISTANCE: 1000 MEGOHMS MIN AT 250VDC

		TOLERANCES (EXCEPT AS NOTED)		7878 N. 86th STREET MILWAUKEE, WI 53224	
		DECIMAL			
		.XX ± .03		FILTER SPECIFICATION KRF16CTB	
		.XXX ± .010			
		FRACTIONAL		DRN BY BW DATE 07-20-98 INWG NO C 100285DG	
		± 1/16		SCALE 1/2"=1' SHT. 1 OF 1	
SEE ECD #1792		7-15-99	BW		
NO	REVISION	DATE	BY		