

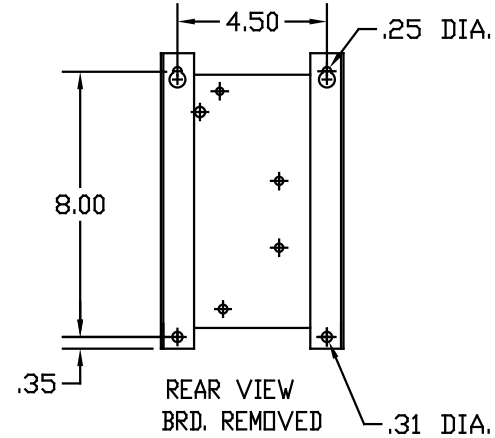
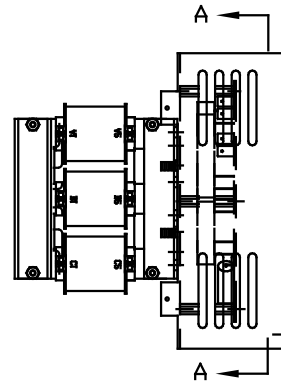
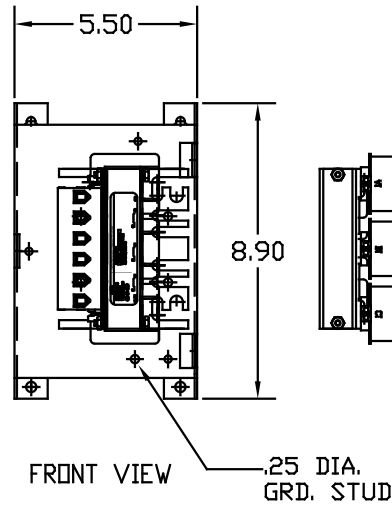


| SPECIFICATIONS: | |
|-----------------|-----------------|
| AMP. | 16 |
| VOLT | 480 |
| PHASE | 3 |
| HZ | 60 |
| WEIGHT, LBS. | 12 |
| ENCLOSURE | OPEN DESIGN |
| ENCL., COLOR | POLY PEEL BLACK |



TOLERANCE UNLESS OTHERWISE NOTED:
 MOUNTING +/- .06
 OVERALL +/- .12

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

| | | | | | |
|------------------------|---------|-----|--|------------------------------------|--|
| | | | | TOLERANCES EXCEPT AS NOTED | 7878 N. 86th STREET MILWAUKEE, WI 53224 |
| | | | | DECIMAL .XX ± .01 XXX ± .005 | |
| △ 2484, ADD TOL. CHART | | | | FRACTIONAL ± 1/32 | V1K16A00 OUTPUT FILTER 16 AMP., 480 V, OPEN |
| RMVD WIRE SIZE NOTE | 3/17/07 | RJC | | ANGULAR ± 1/2° | DRN BY RJC DATE 2/1/05 DWG. NO. 102316DG |
| NO REVISION | | | | | SCALE -- APPRVD. B SHT. 1 OF 1 |