
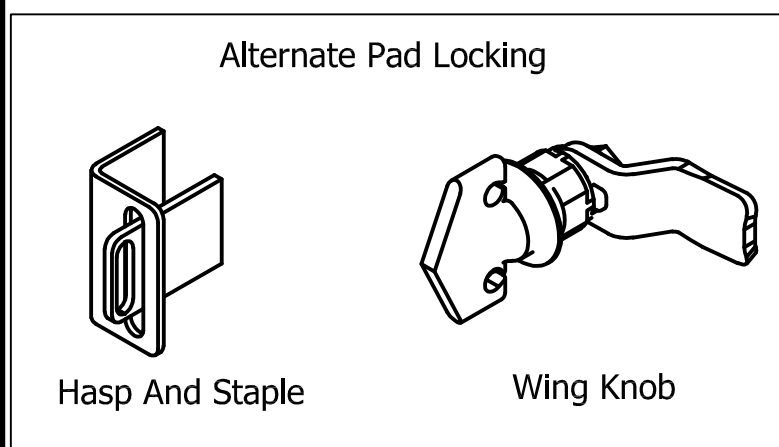
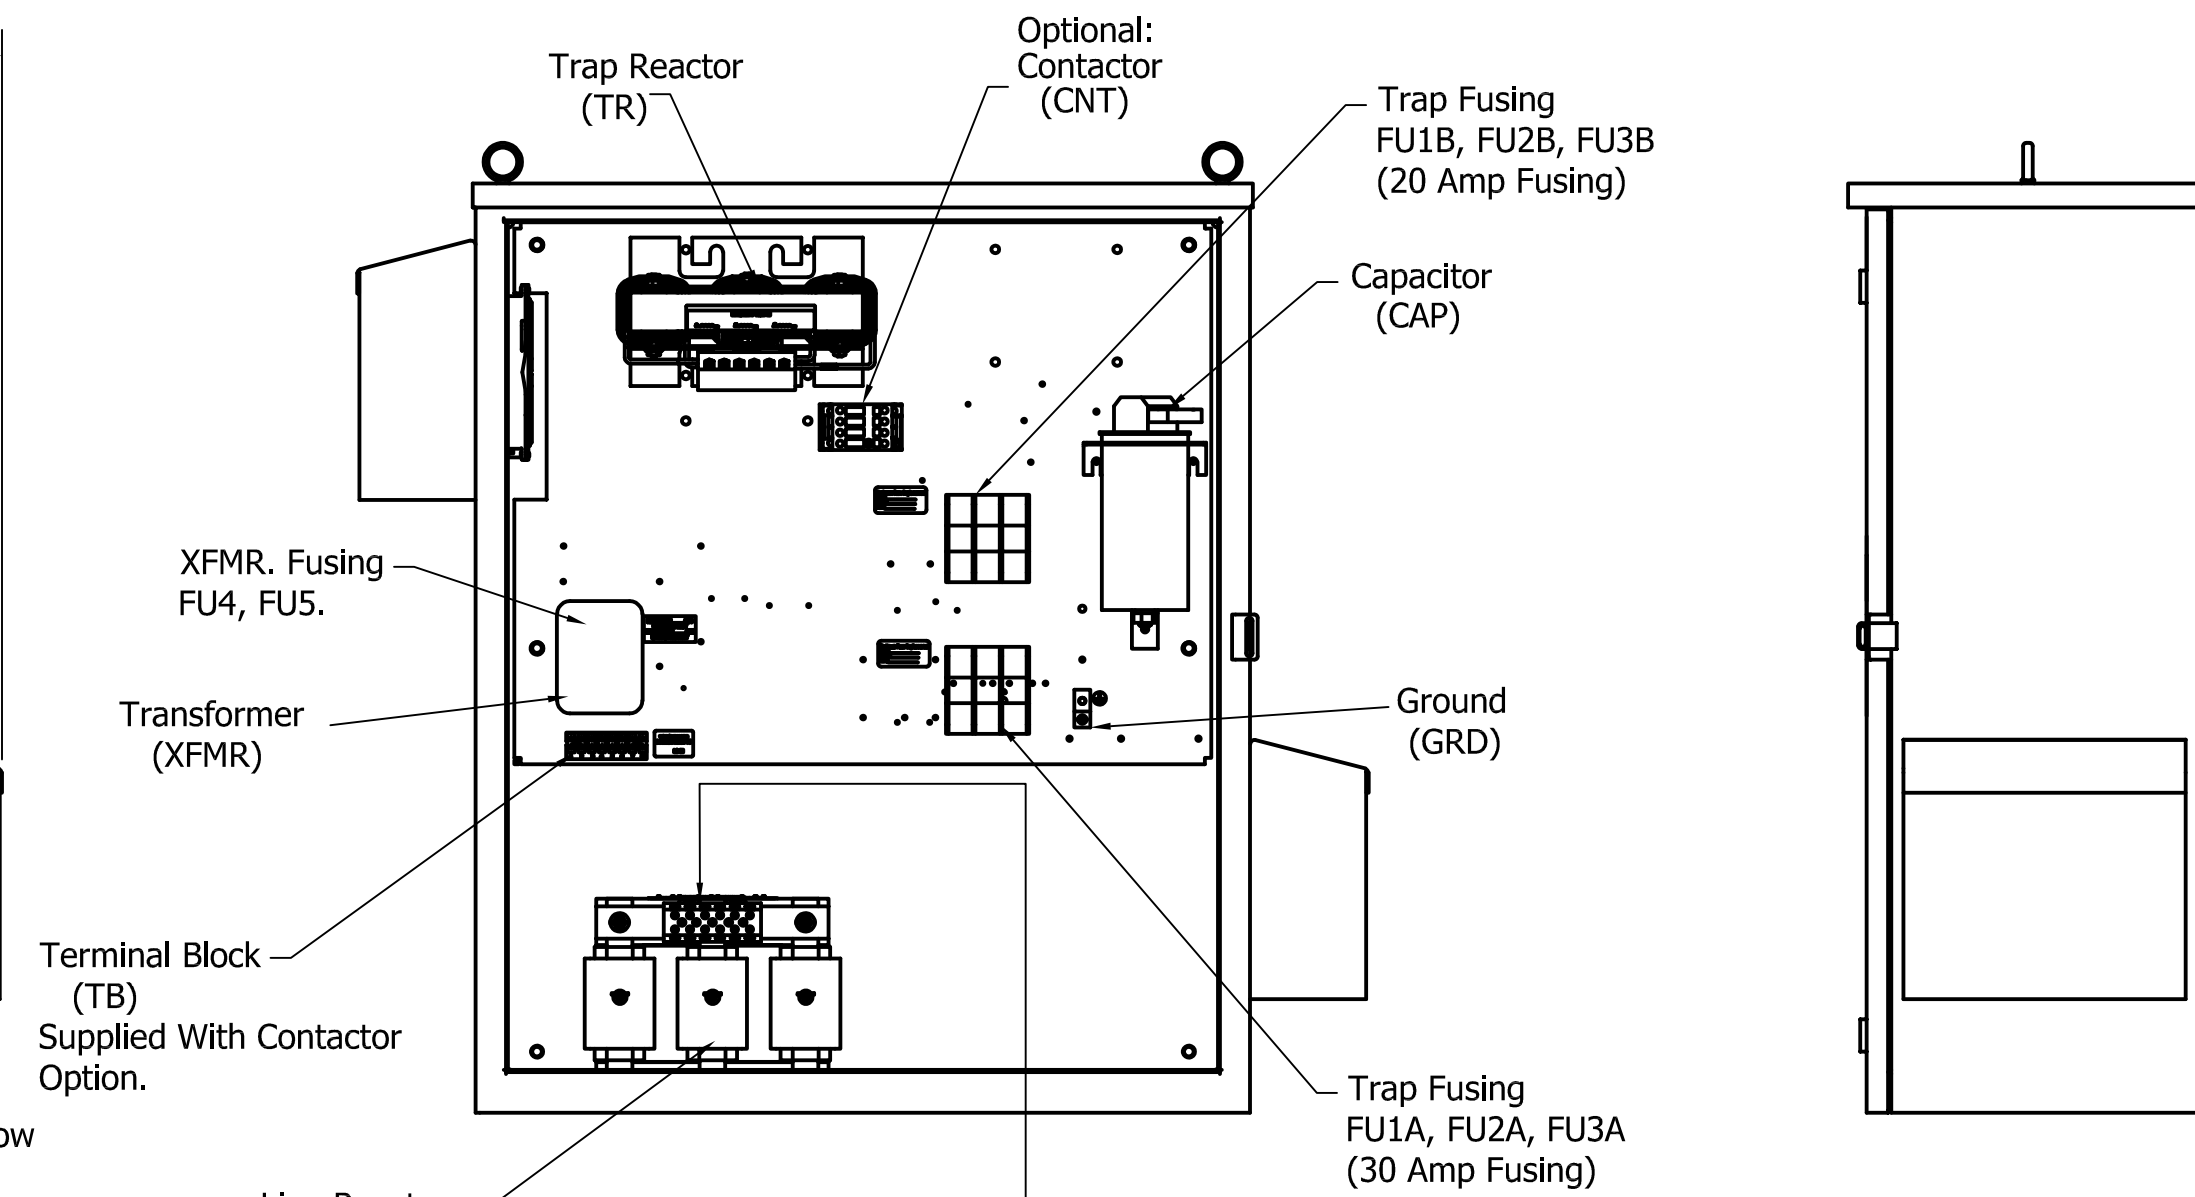


Alternate Rain Hood Construction.

Unit Specifications					
kVar	Harmonic	Volt	HZ.	Phase	HP
6	5TH	480	60	3	40




TCI Part Number	Option	Weight	Schematic
HGL0040AW3S0000	Standard	220lbs	30586-S
HGL0040AW3C0000	Contactors	221lbs	30586-C

See IOM Manual For Wire Range And Tightening Torque.

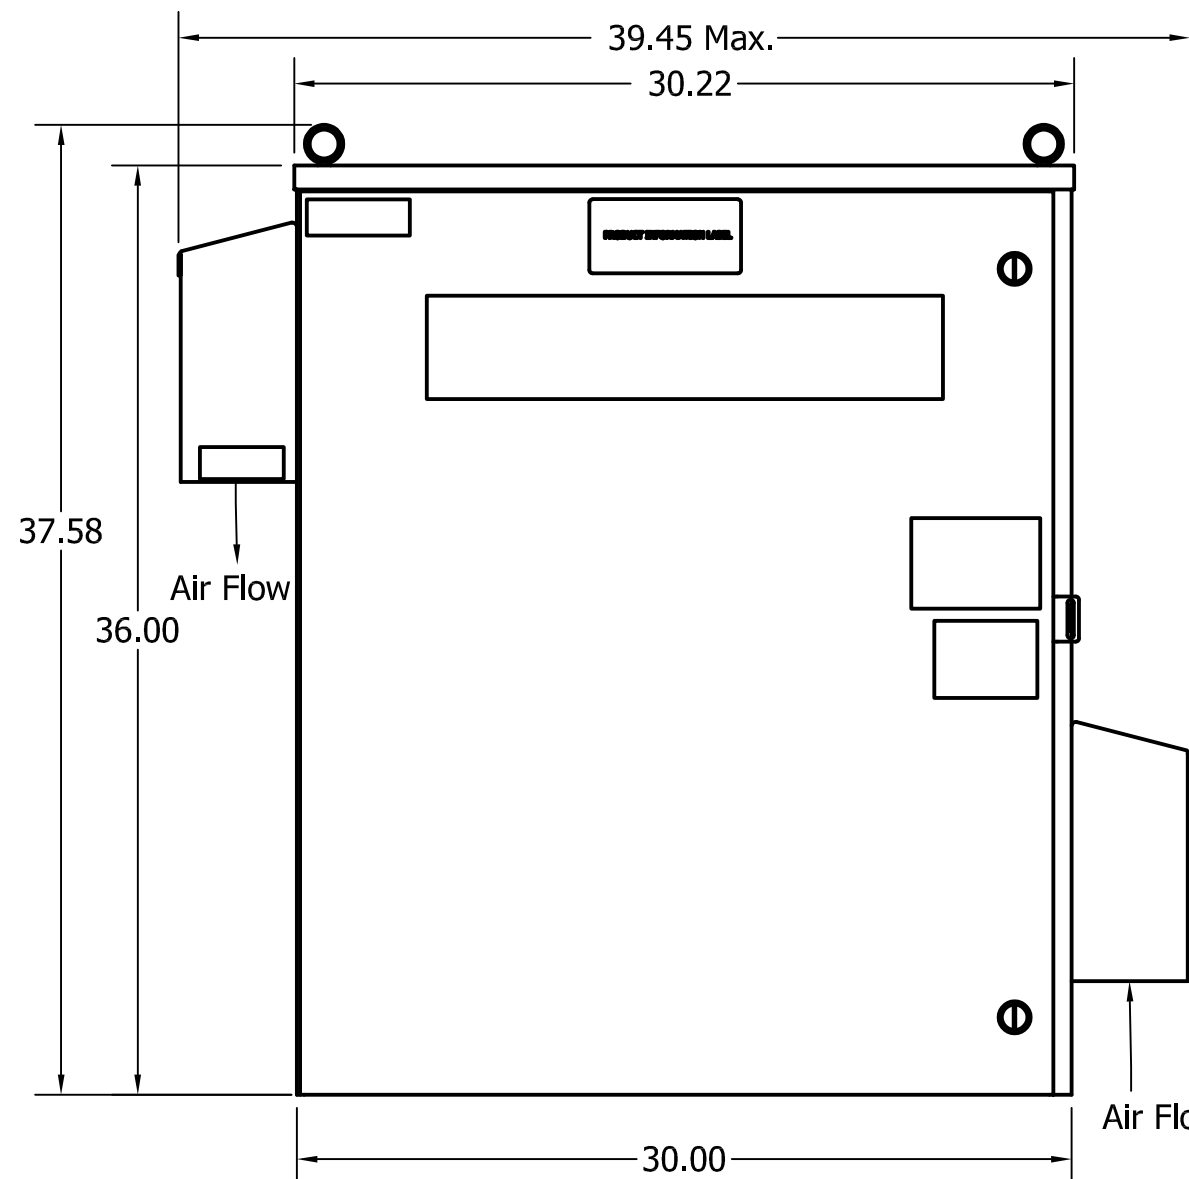

Hasp And Staple

Wing Knob

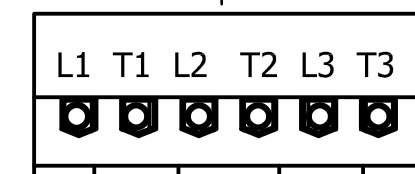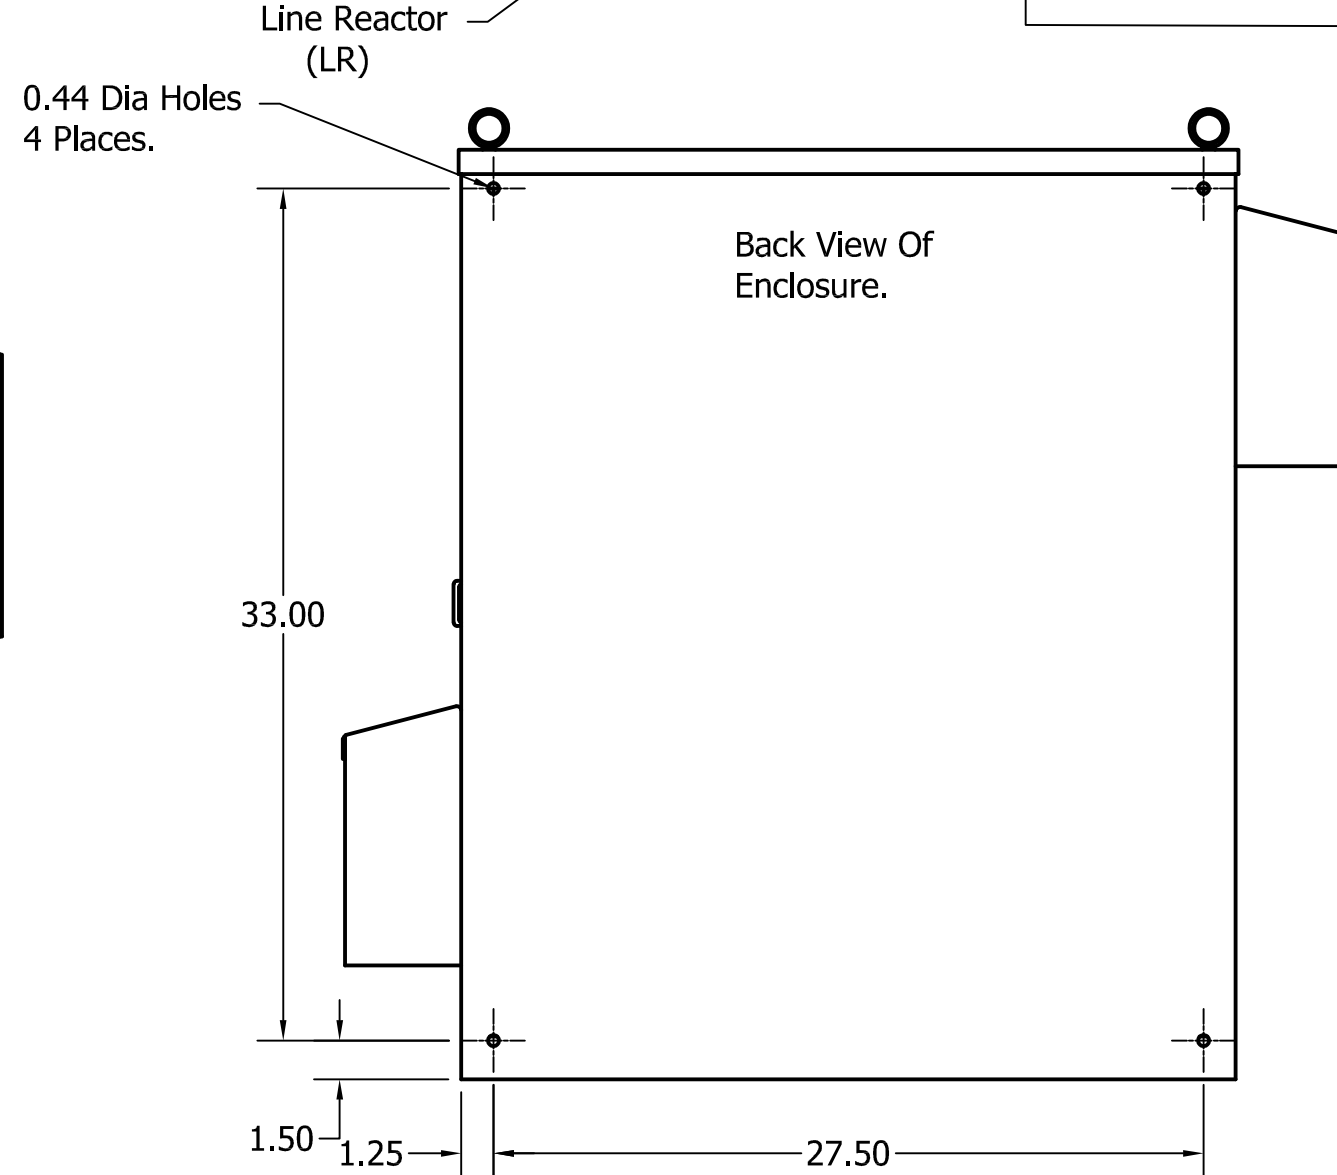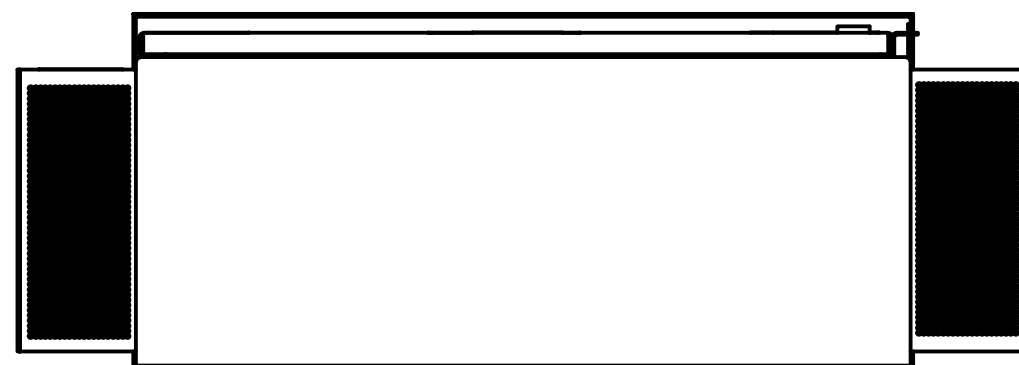

Customer Connection L1 T1 L2 T2 L3 T3

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELETRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES

Material(s) Shall be RoHS Compliant

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREDJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.

NO	REVISION	DATE	BY	TOLERANCES (EXCEPT AS NOTED)
A	AS DESIGNED	5/30/17	DSW	DECIMAL .XX +/- .25 .XXX +/- .12 FRACTIONAL +/- 1/16 ANGULAR +/- 1°

TCI® W132 N10611 Grant Drive
 Germantown, WI 53022

HGL0040AW3C0000, 480V, 40HP, 3 Phase
 HGL0040AW3S0000, 480V, 40HP, 3 Phase
 60 Hz, Type 3R, Low C, Passive Harmonic Filter

DRN. BY: DSW DATE: 5/30/17 DWG. No.: 107028DG
 SCALE: 1/8 APRVD.

SHEET 1 OF 1