
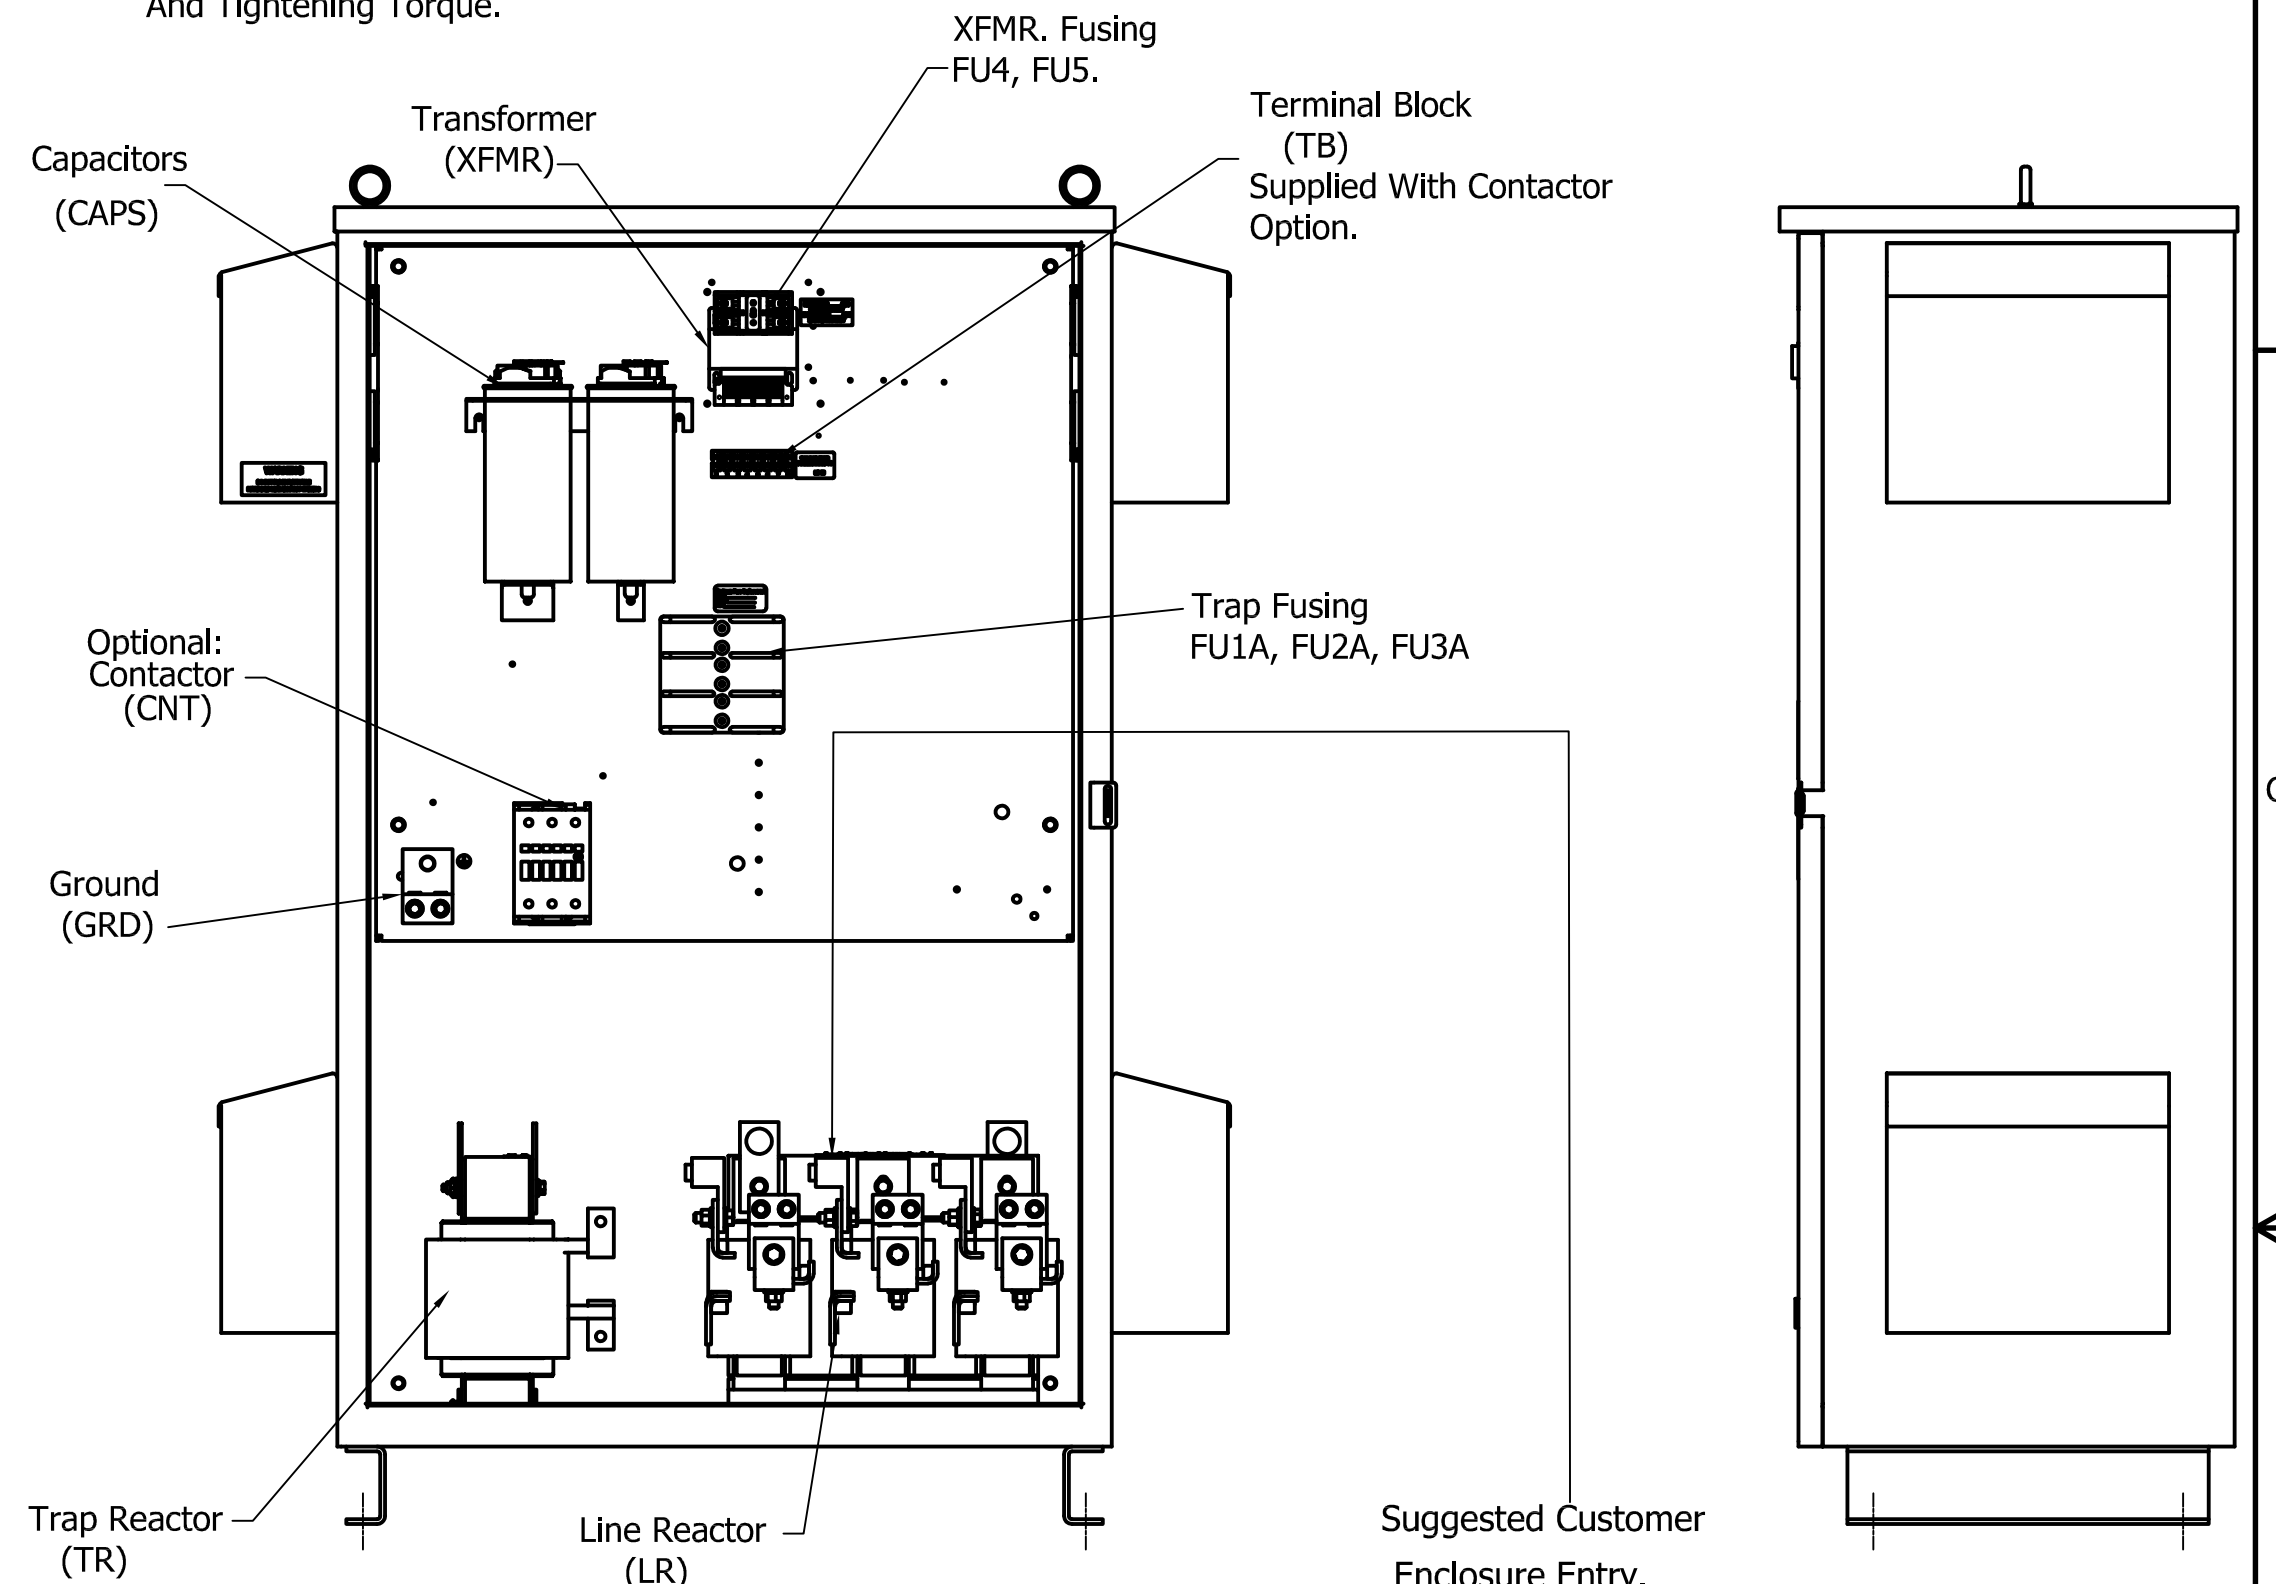


Alternate Rain Hood Construction.


Unit Specifications					
kVar	Harmonic	Volt	HZ.	Phase	HP
30	5TH	480	60	3	200

TCI Part Number	Option	Weight	Schematic
HGL0200AW3S0000	Standard	470lbs	30586-1
HGL0200AW3C0000	Contactors	475lbs	30586


See IOM Manual For Wire Range And Tightening Torque.

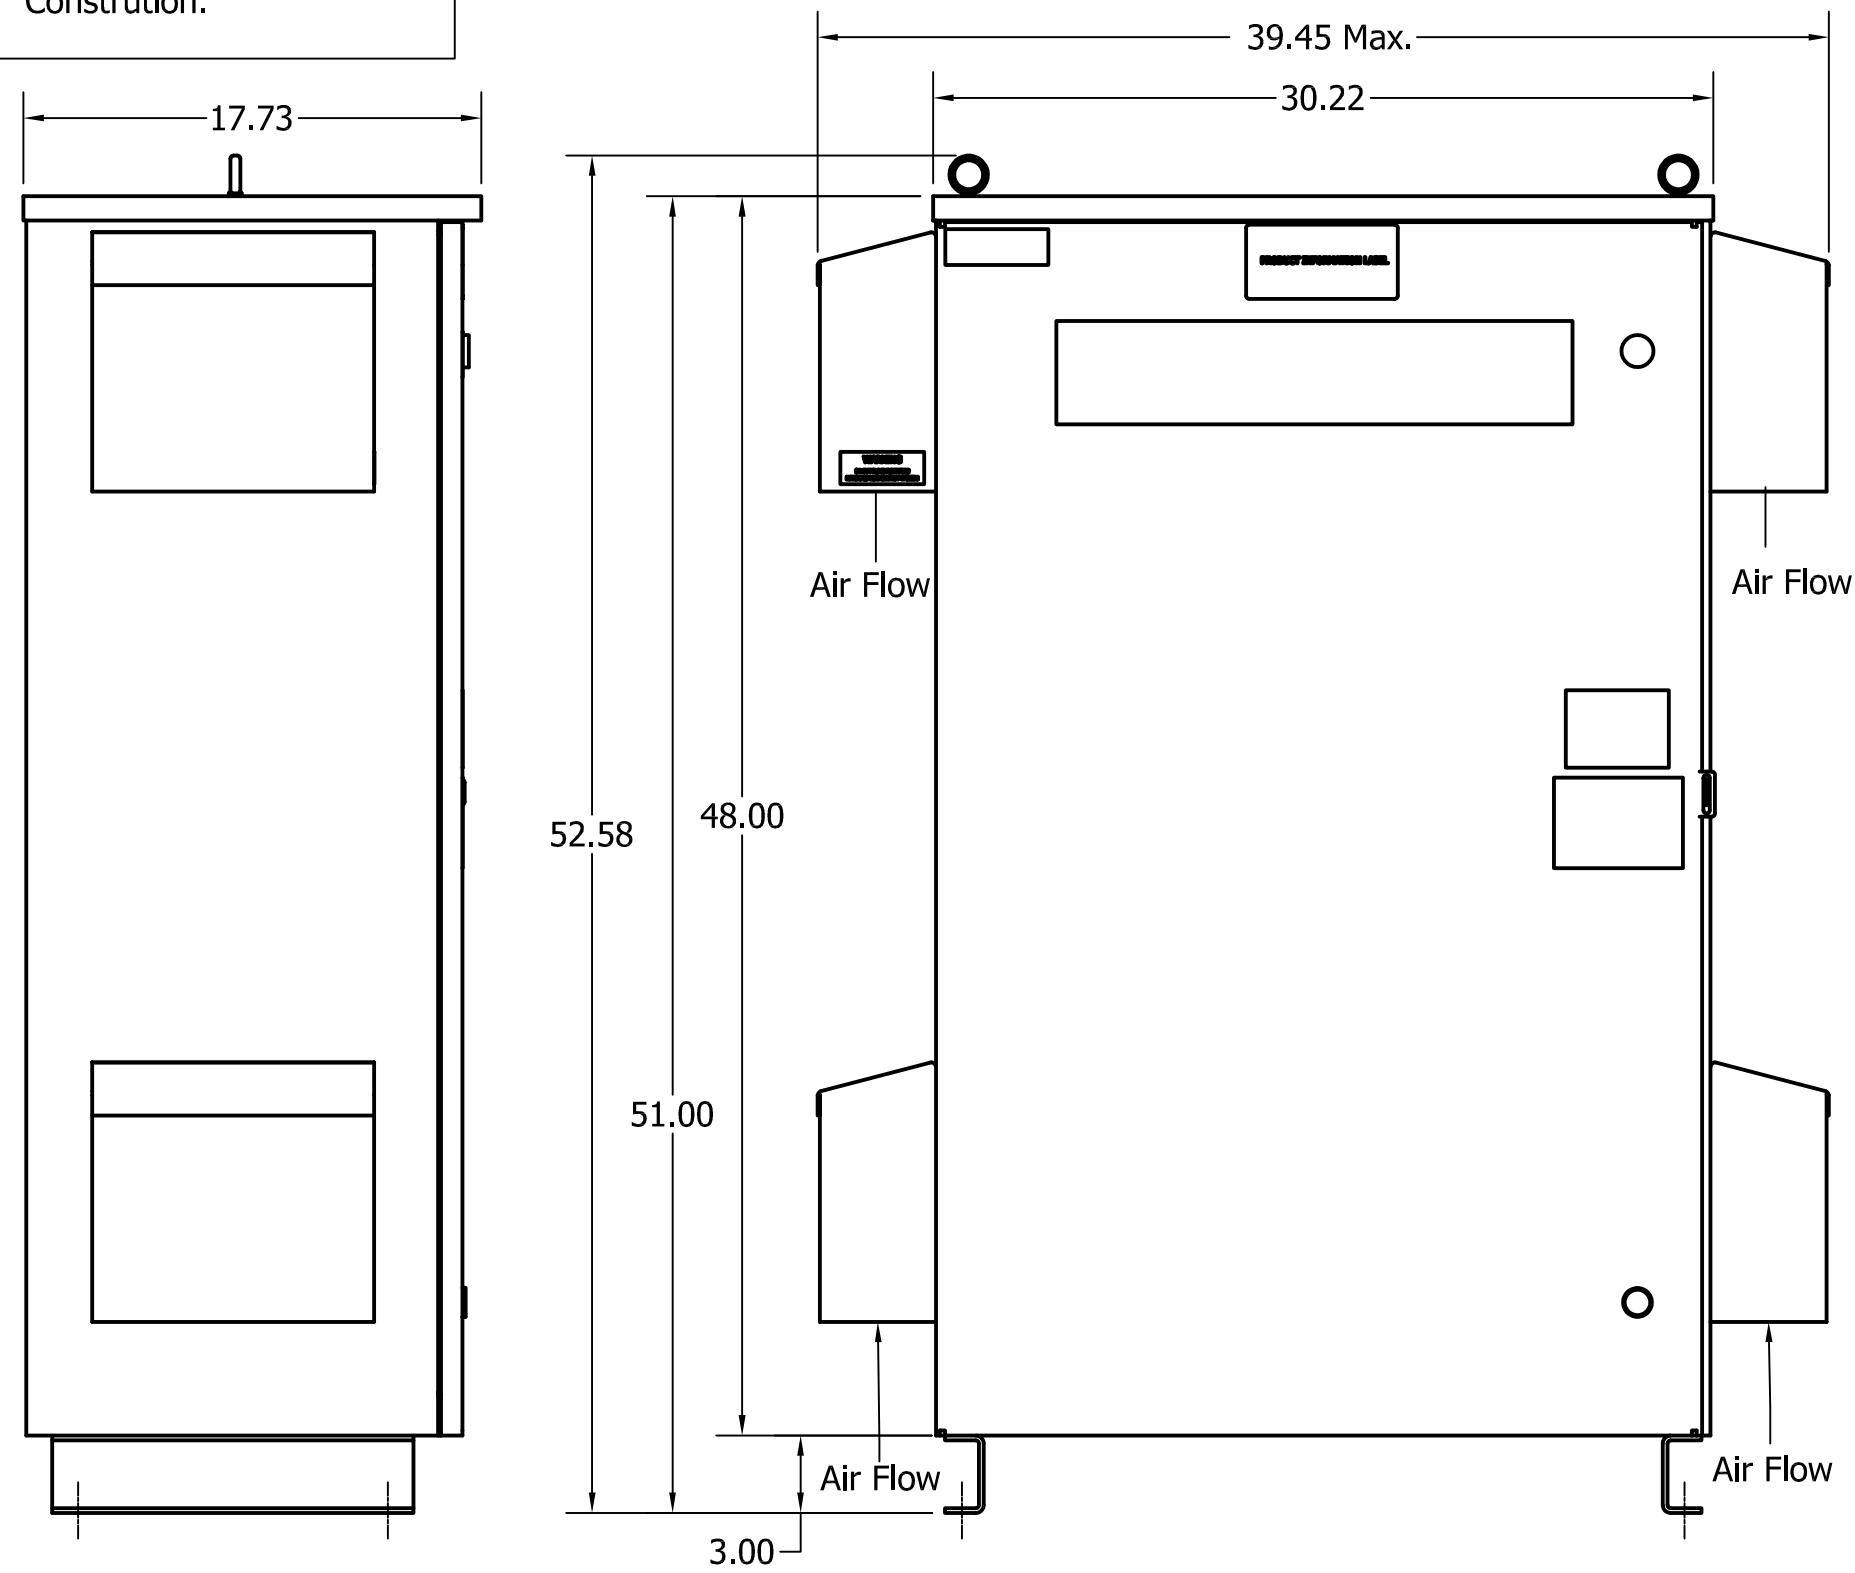

Suggested Customer Enclosure Entry.
Customer Connection
L1 L2 L3
T1 T2 T3

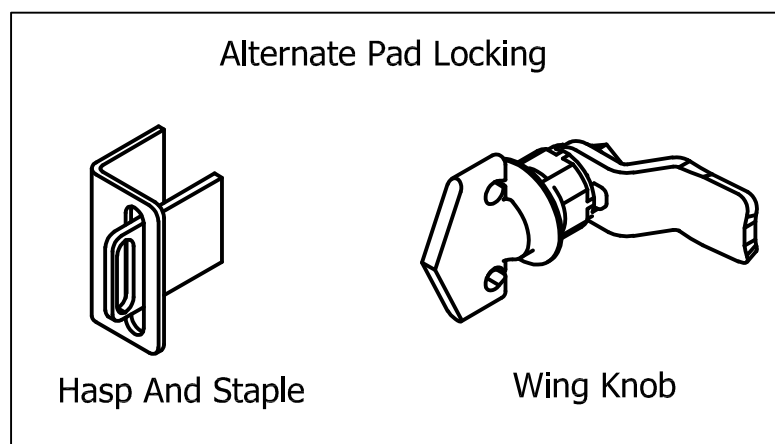

Hasp And Staple Wing Knob

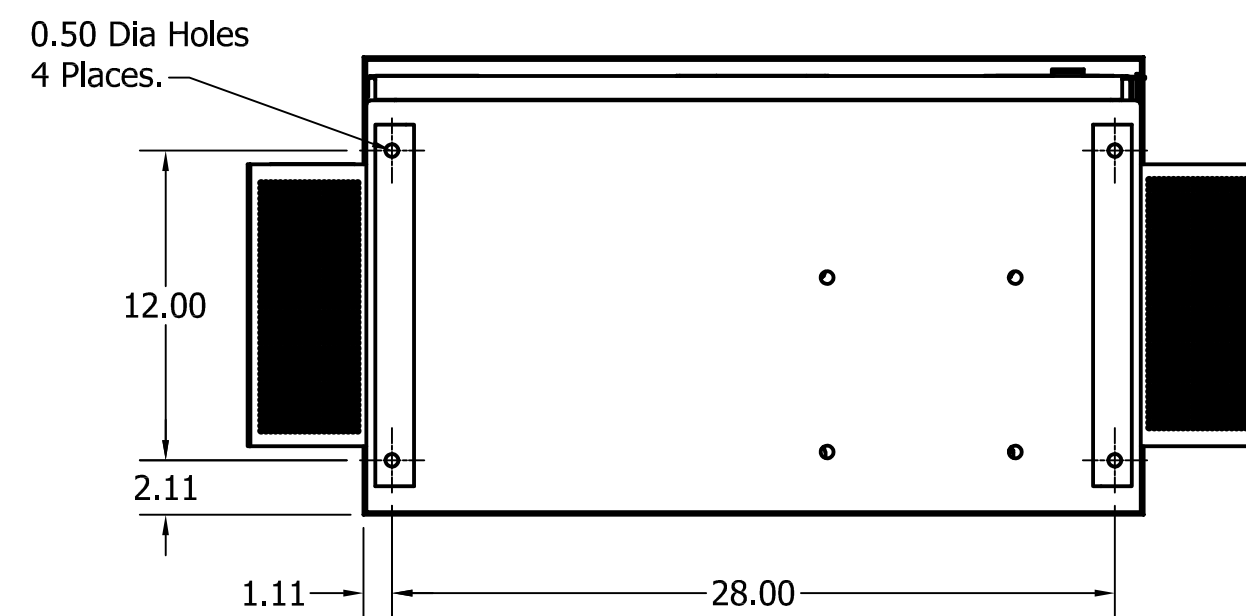

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES. NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES

Material(s) Shall be RoHS Compliant

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.

NO	REVISION	DATE	BY	SCALE
A	AS DESIGNED	5/31/17	DSW	ANGULAR
				+/- 1

	W132 N10611 Grant Drive Germantown, WI 53022	
	HGL0200AW3C0000, 480V, 200HP, 3 Phase HGL0200AW3S0000, 480V, 200HP, 3 Phase 60 Hz, Type 3R, Low C, Passive Harmonic Filter	
DRN. BY DSW	DATE 5/31/17	DWG. No. 107035DG
SCALE 1/8	APRVD.	SHEET 1 OF 1