
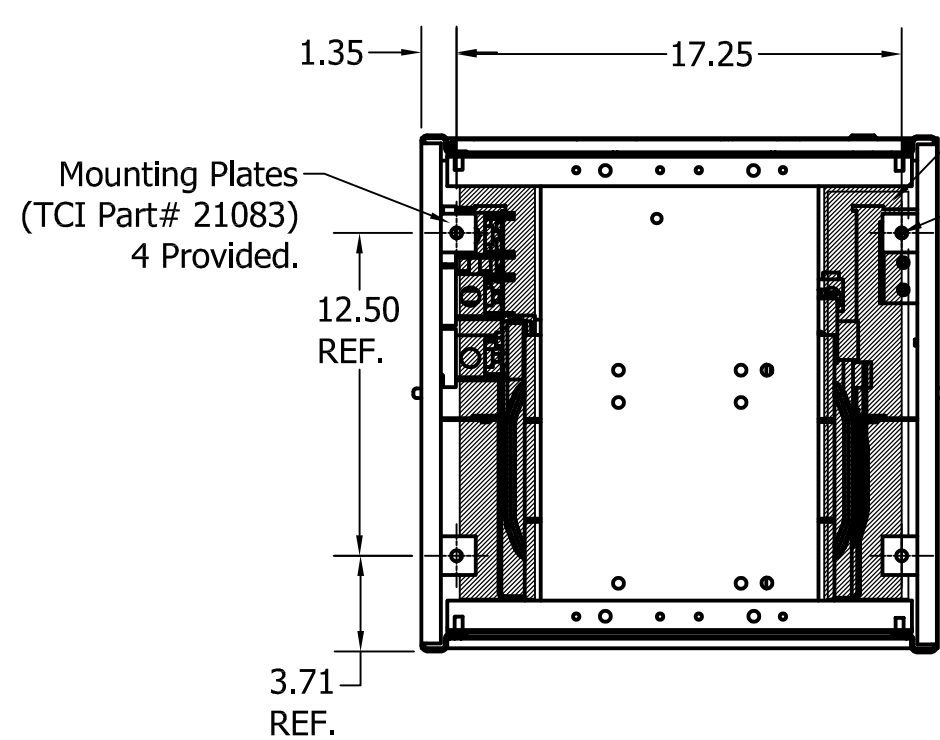
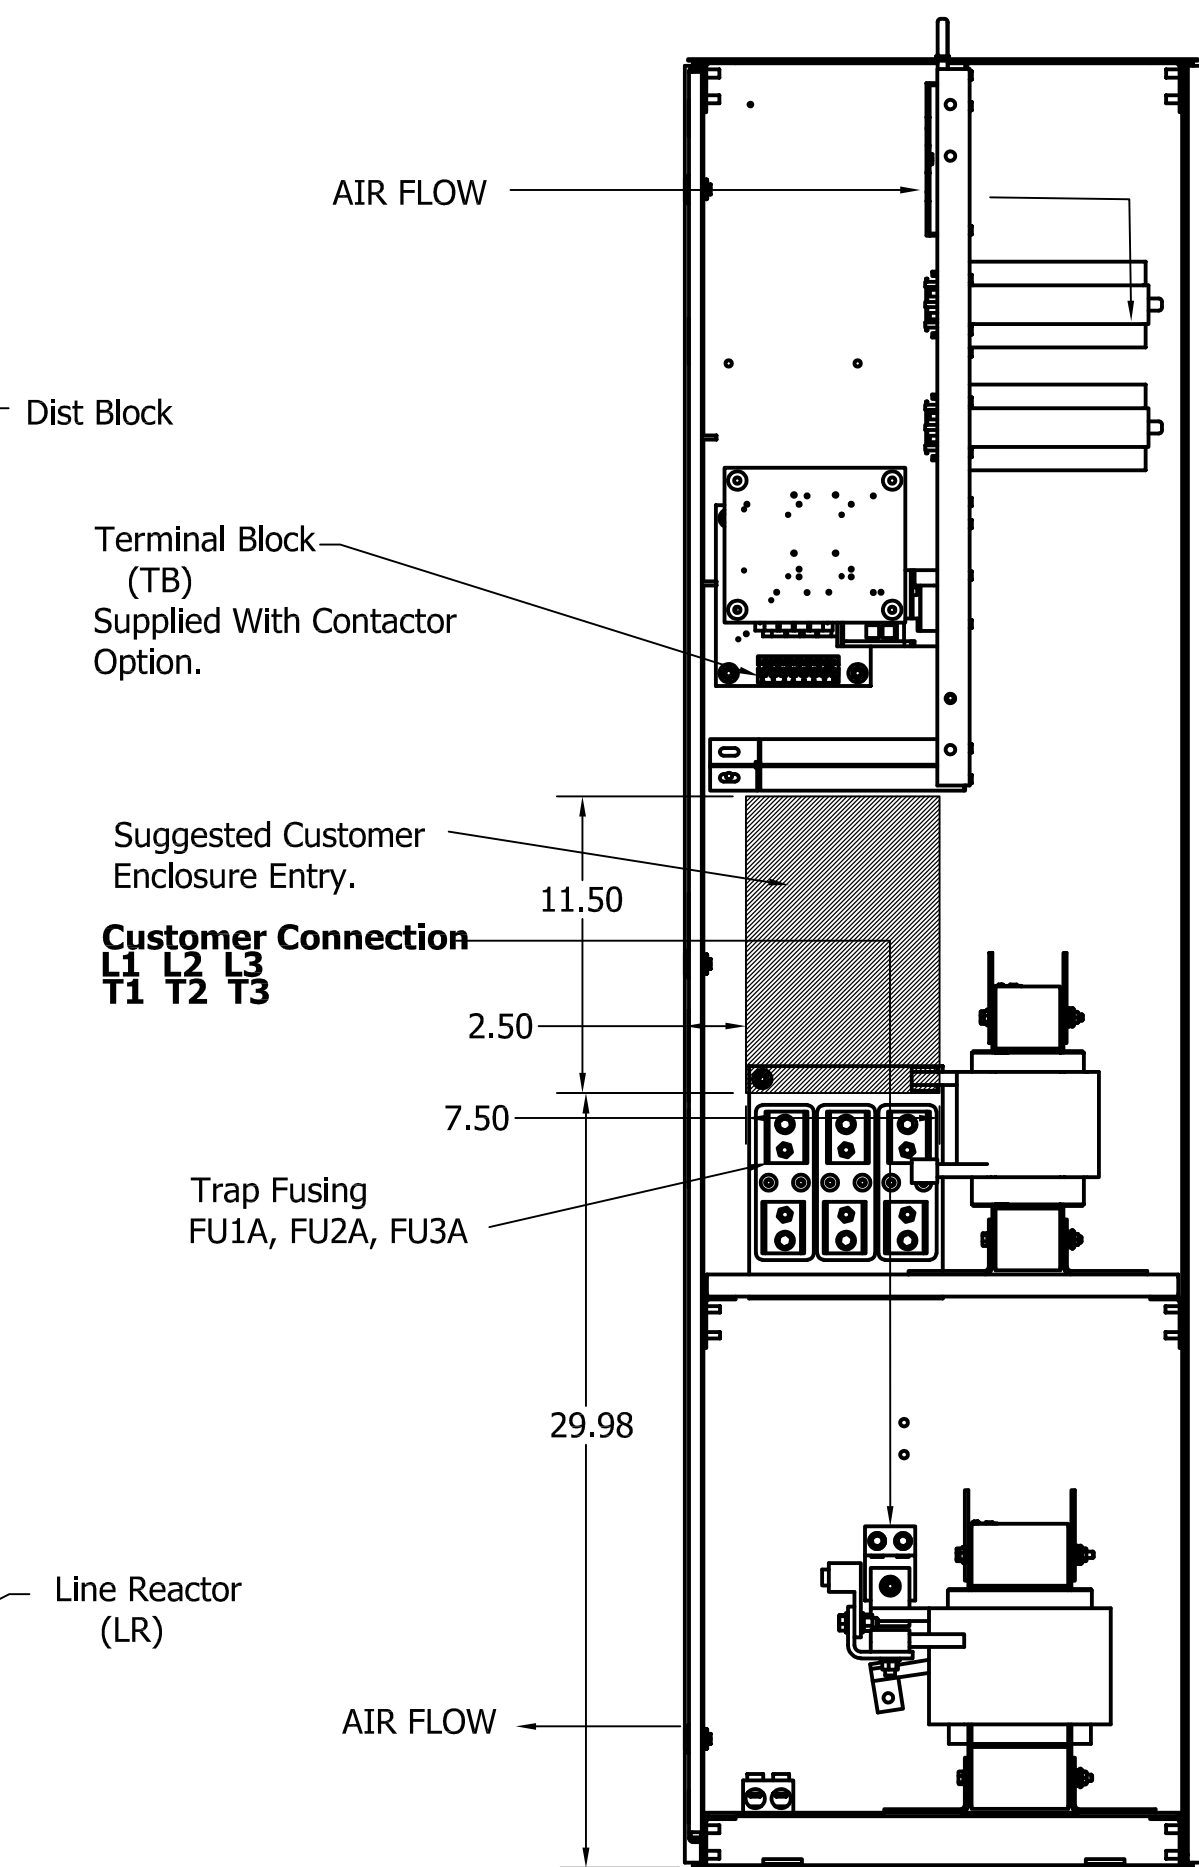
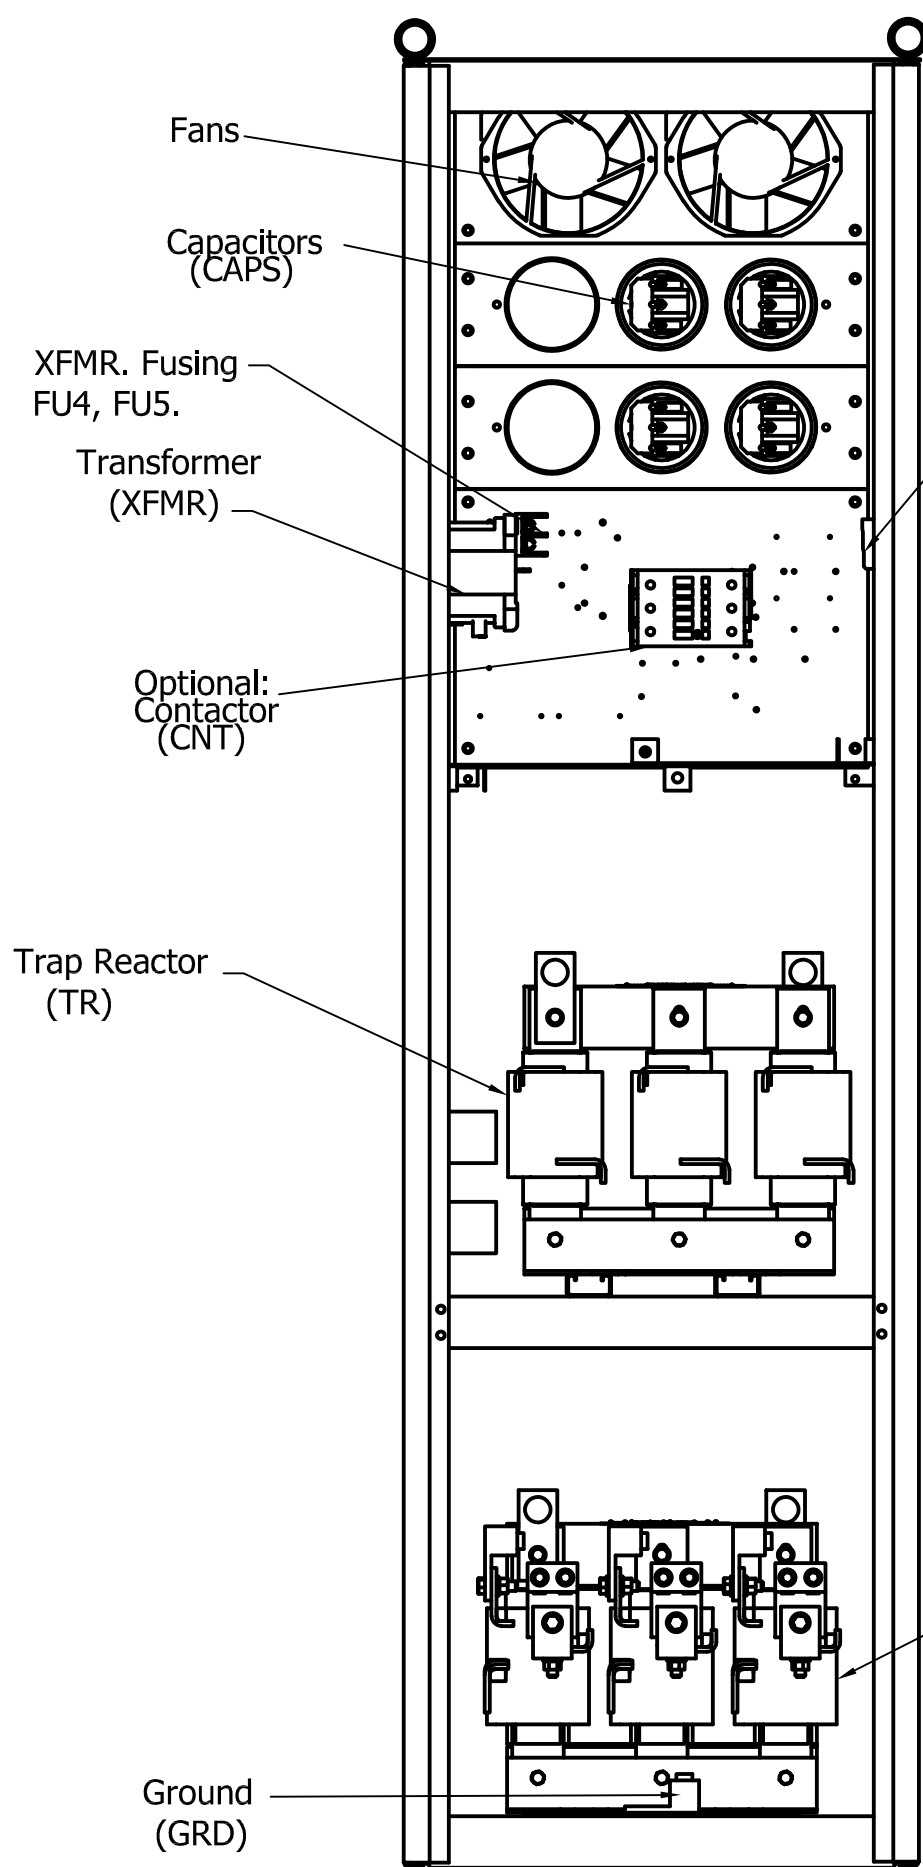
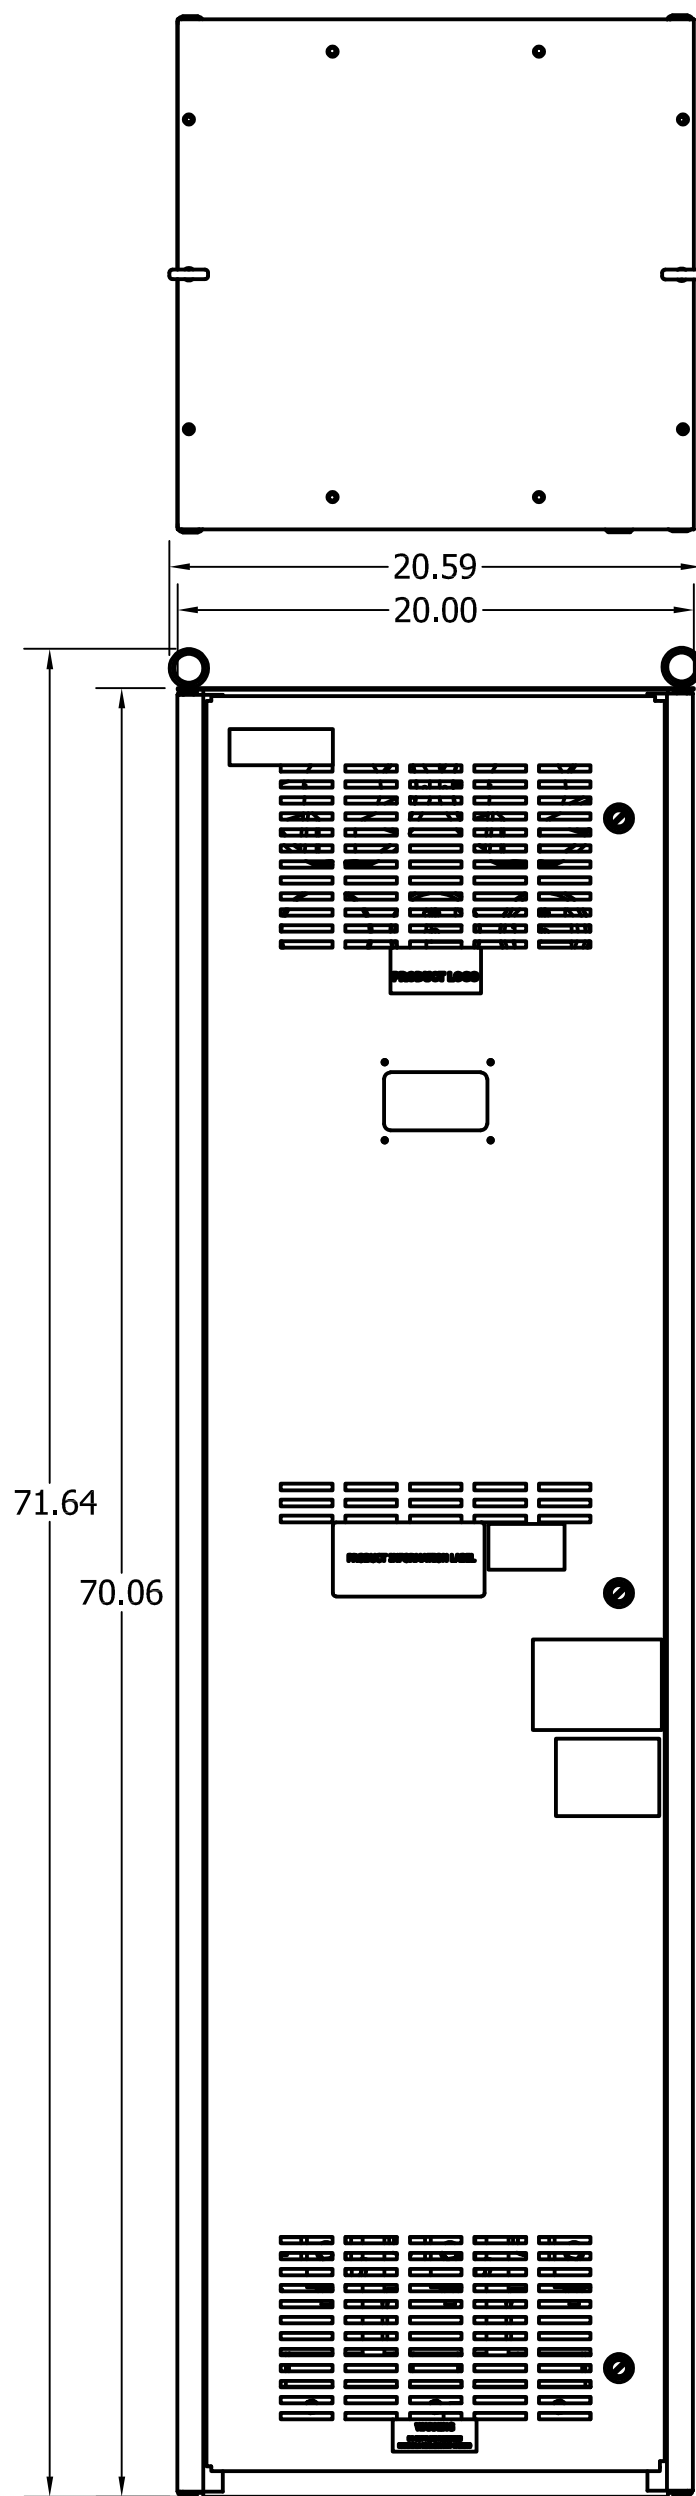


Unit Specifications					
kVar	Harmonic	Volt	HZ.	Phase	HP
40	5TH	480	60	3	250

TCI Part Number	Option	Weight	Schematic
HGL0250AW1S0000	Standard	535lbs	30586-1S
HGL0250AW1C0000	Contactator	545lbs	30586-1C

See IOM Manual For Wire Range  
And Tightening Torque.



Cable Entrance Through Bottom Openings. (Hatched Area)  
0.44 Dia Holes 4 Places.

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREDJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELETRICAL CODES.

Material(s) Shall be RoHS Compliant

NO	REVISION	DATE	BY	TOLERANCES (EXCEPT AS NOTED)
A	AS DESIGNED	3/30/17	DSW	DECIMAL .XX +/- .25 .XXX +/- .12 FRACTIONAL +/- 1/16 ANGULAR +/- 1°

**TCI**® W132 N10611 Grant Drive  
Germantown, WI 53022

HGL0250AW1C0000, 480V, 250HP, 3 Phase  
HGL0250AW1S0000, 480V, 250HP, 3 Phase  
60 Hz, Type 1, Low C, Passive Harmonic Filter

DRN. BY: DSW DATE: 3/30/17 DWG. No.: 107022DG  
SCALE: 1/8 APRVD.

SHEET 1 OF 1