

Alternate Rain Hood Construction.




Unit Specifications					
kVar	Harmonic	Volt	HZ.	Phase	HP
50	5TH	480	60	3	300

TCI Part Number	Option	Weight	Schematic
HGL0300AW3S0000	Standard	615lbs	30586-1S
HGL0300AW3C0000	Contactor	620lbs	30586-1C


See IOM Manual For Wire Range And Tightening Torque.

XFMR. Fusing FU4, FU5.

Customer Connection L1 L2 L3 T1 T2 T3 Suggested Customer Enclosure Entry.

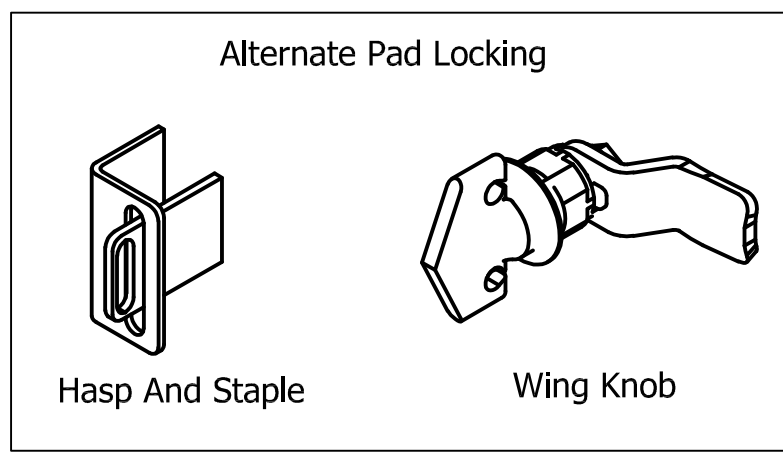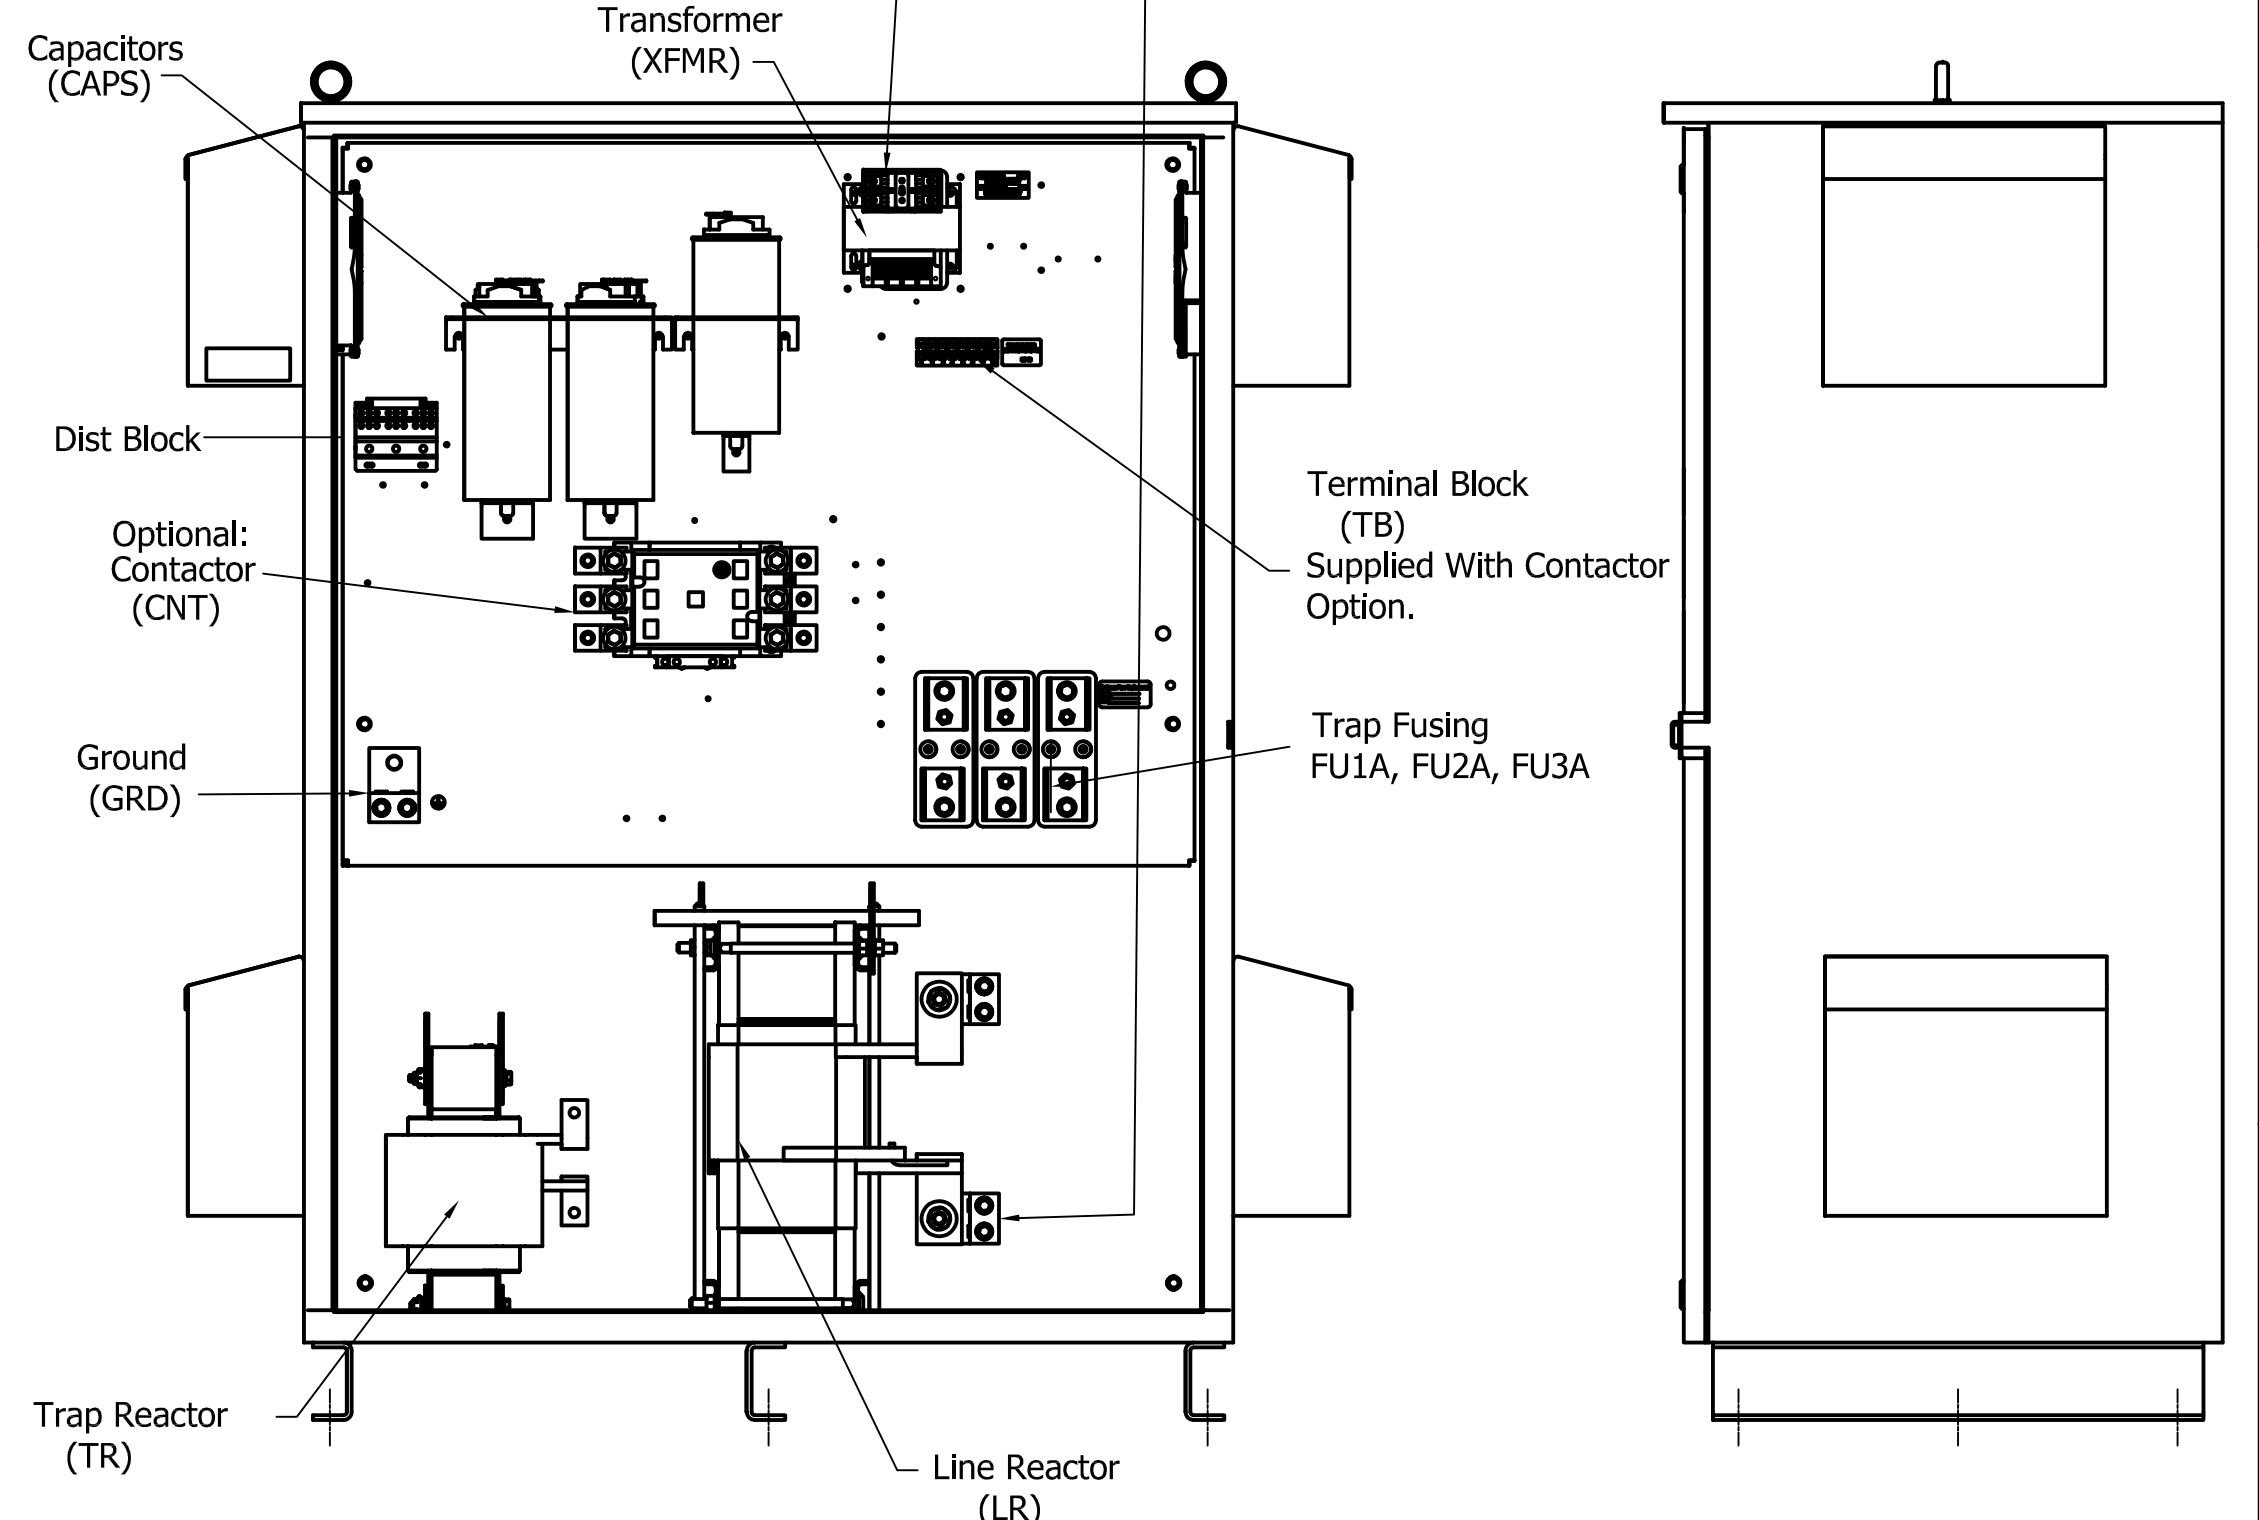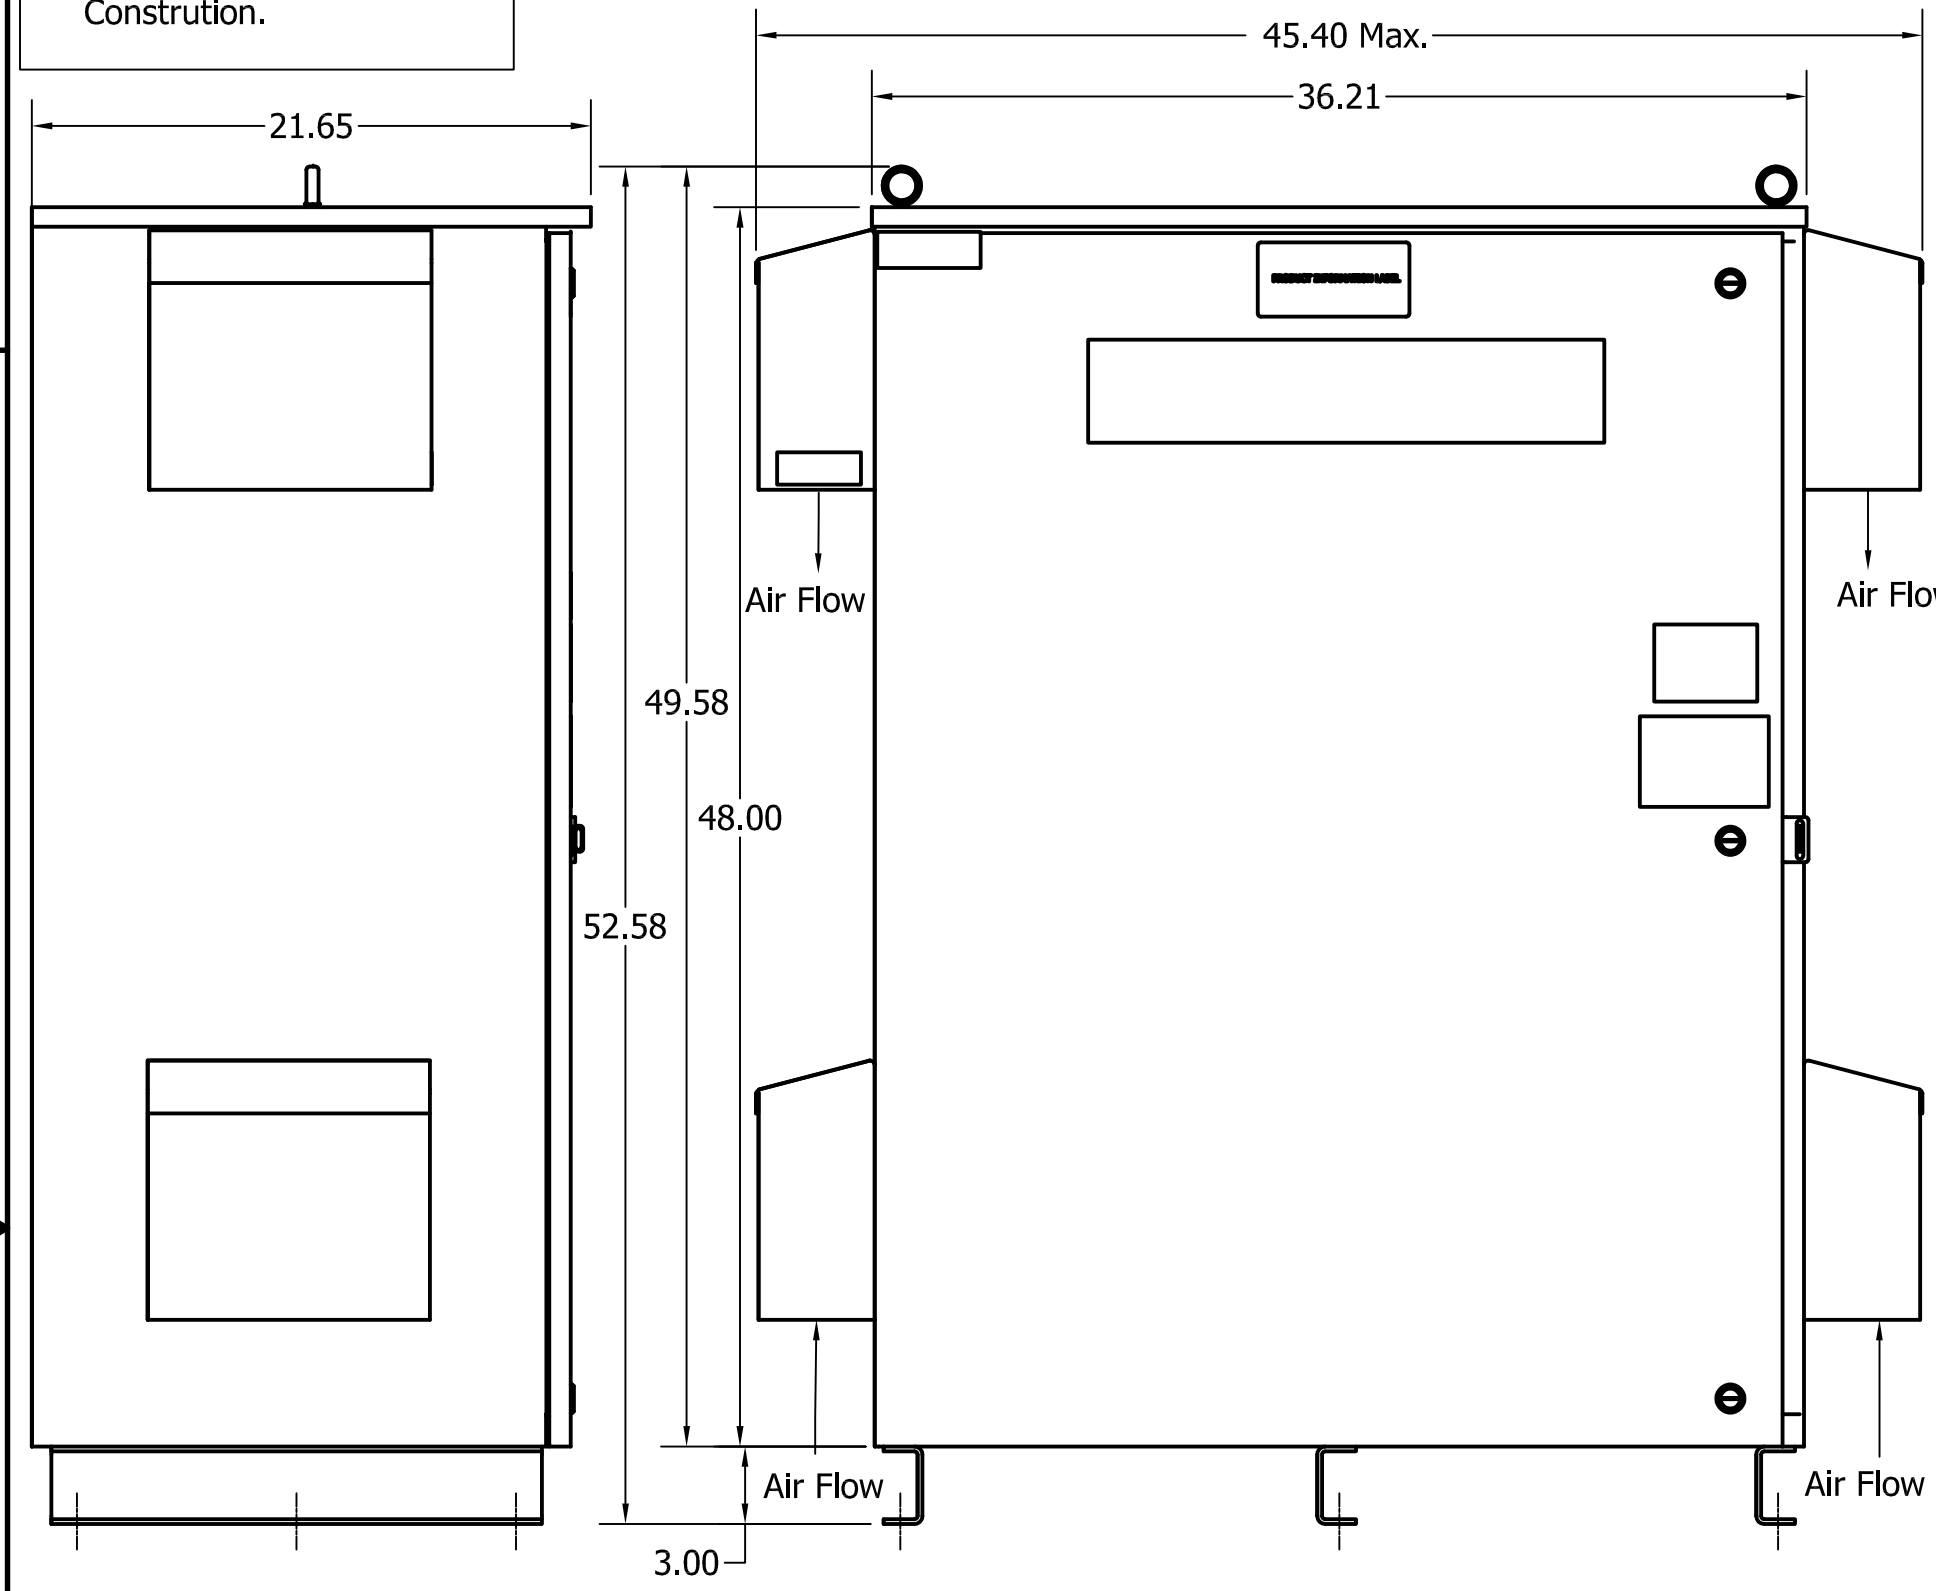

0.50 Dia Holes 9 Places.

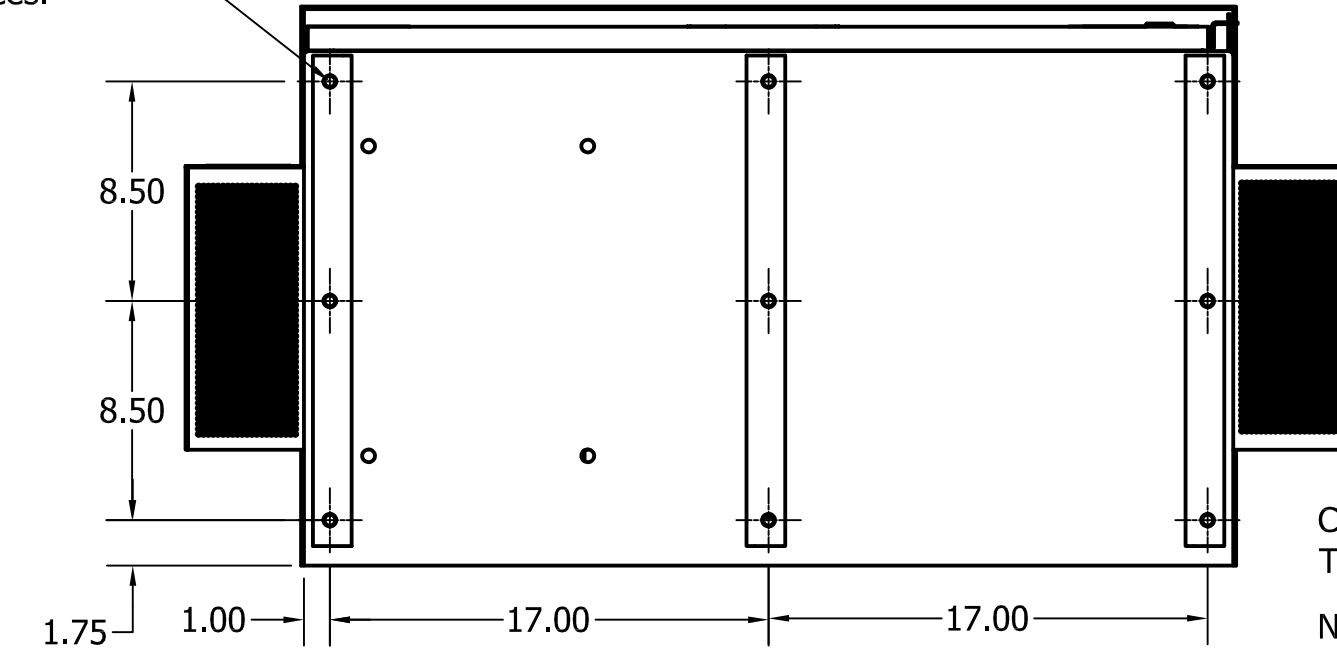

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELETRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES

Material(s) Shall be RoHS Compliant

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREDJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.

NO	REVISION	DATE	BY	SCALE
A	AS DESIGNED	6/1/17	DSW	ANGULAR
				+/- 1 °

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX +/- .25
.XXX +/- .12
FRACTIONAL
+/- 1/16

TCI® W132 N10611 Grant Drive
Germantown, WI 53022

HGL0300AW3C0000, 480V, 300HP, 3 Phase
HGL0300AW3S0000, 480V, 300HP, 3 Phase
60 Hz, Type 3R, Low C, Passive Harmonic Filter

DRN. BY: DSW DATE: 6/1/17 DWG. No: 107037DG
SCALE: 1/8 APRVD.

SHEET 1 OF 1