

Unit Specifications					
kVar	Harmonic	Volt	HZ.	Phase	HP
60	5TH	480	60	3	400




TCI Part Number	Option	Weight	Schematic
HGL0400AW3S0000	Standard	985lbs	30586-1S
HGL0400AW3C0000	Contactor	995lbs	30586-1C

See IOM Manual For Wire Range
And Tightening Torque.


Customer Connection
L1 L2 L3
T1 T2 T3

Suggested Customer
Enclosure Entry.

Optional:
Contactor
(CNT)

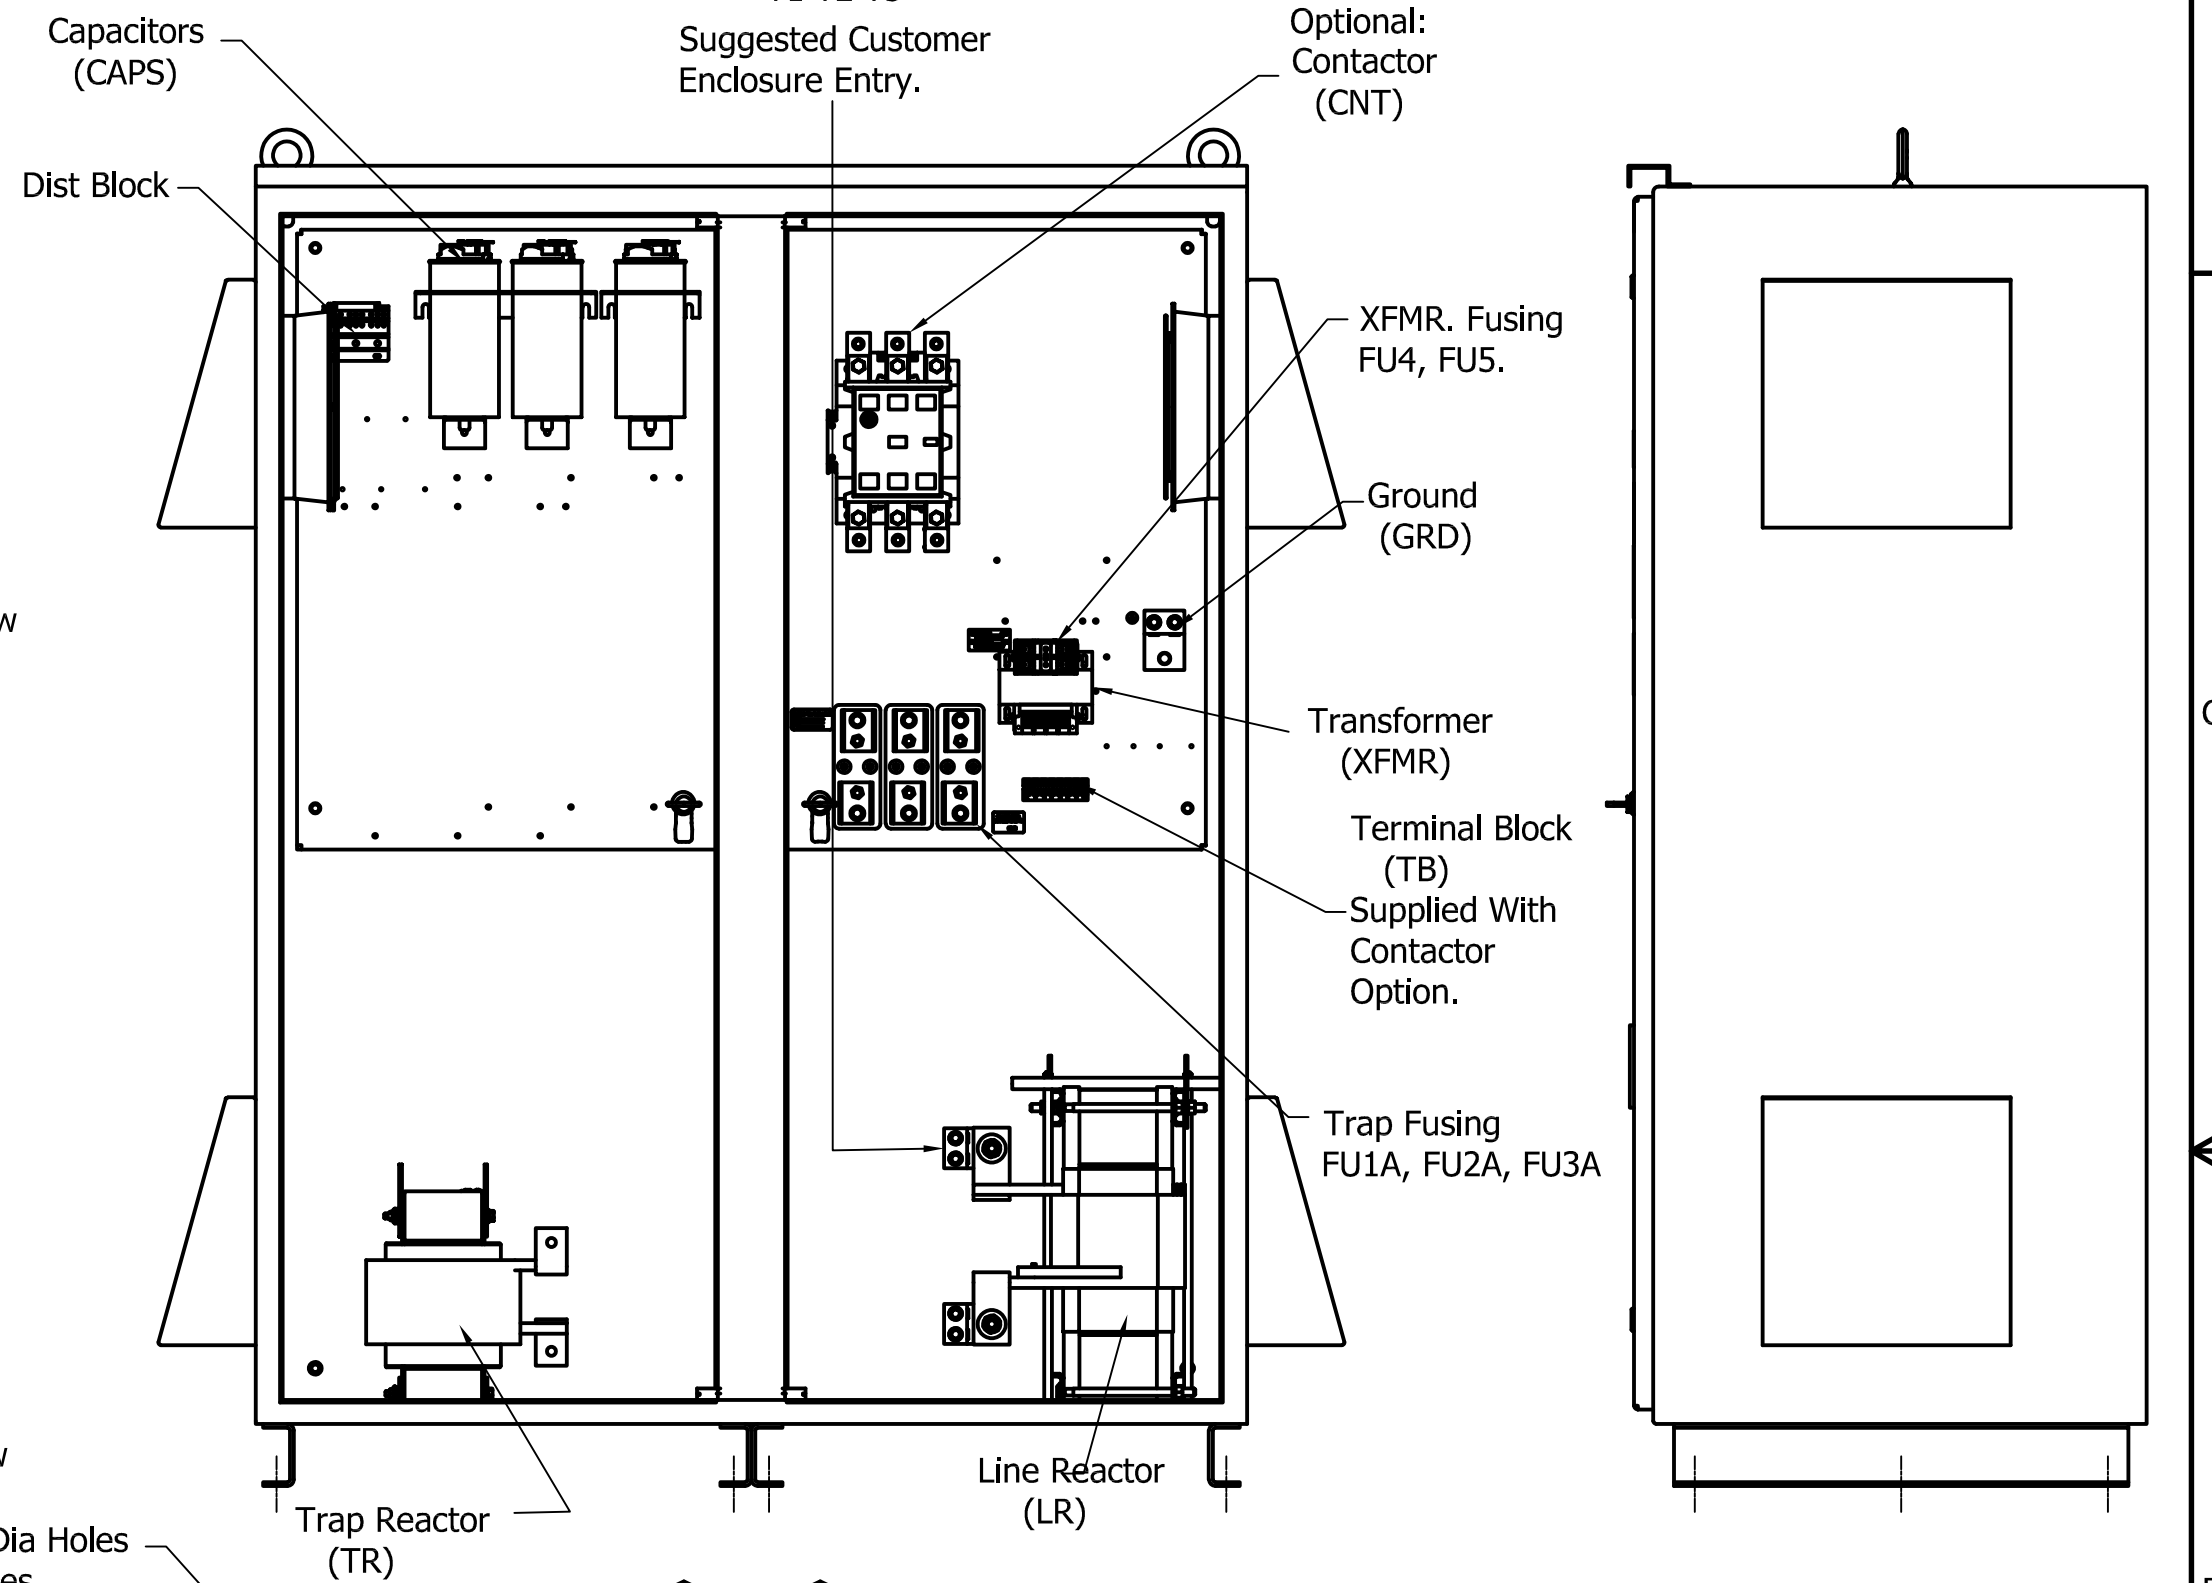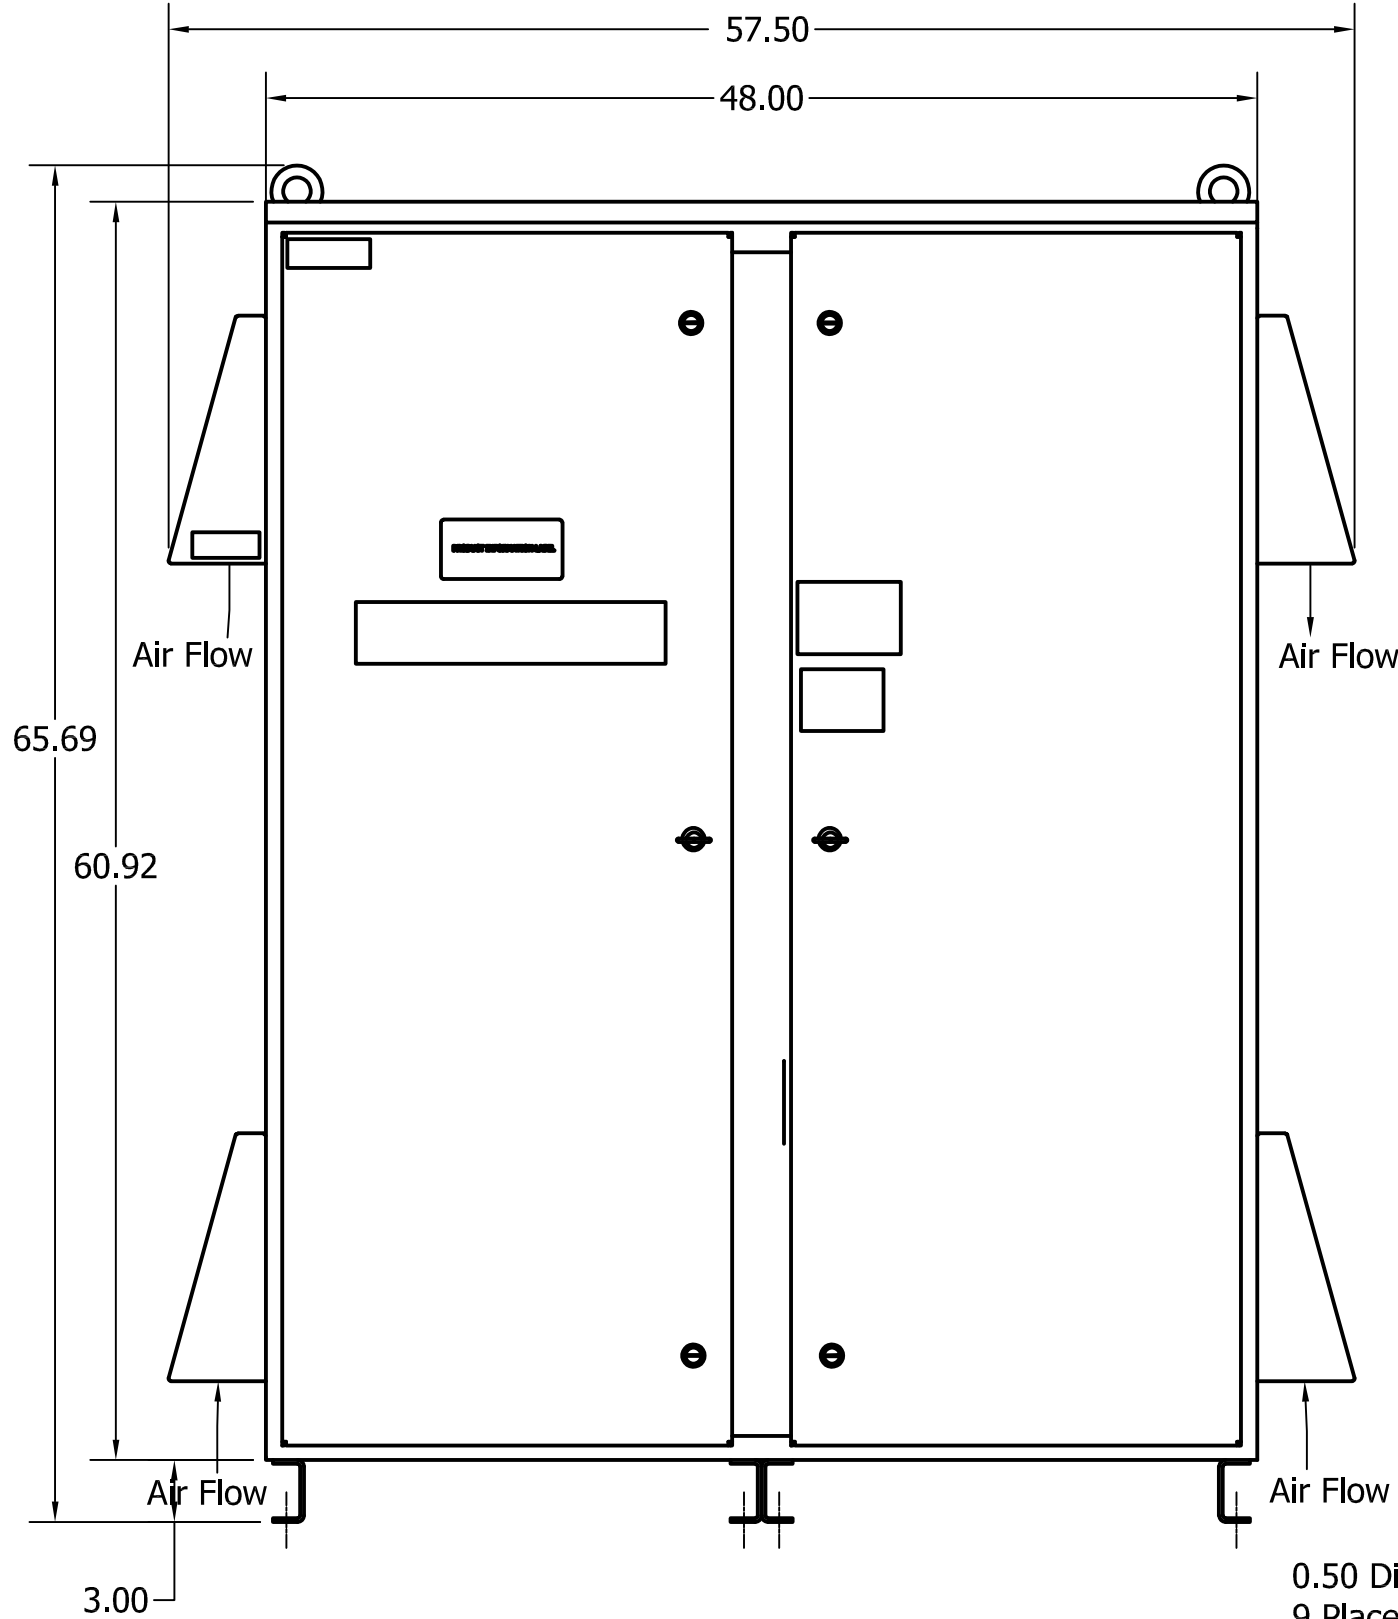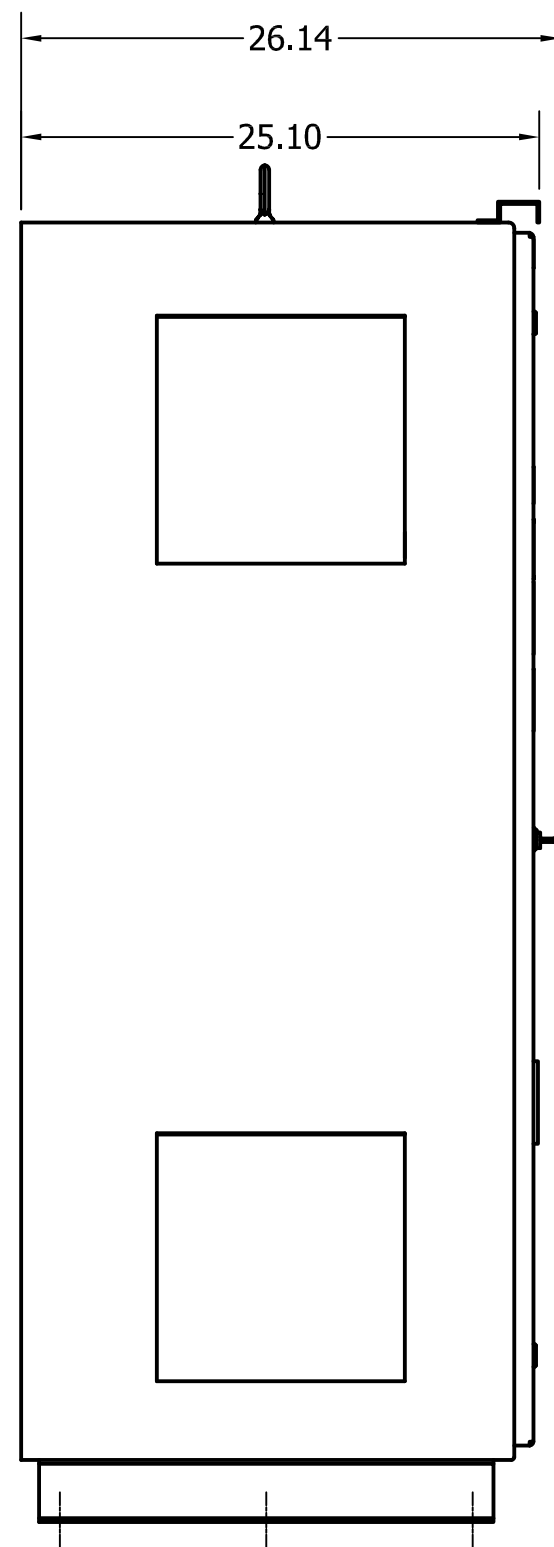

0.50 Dia Holes
9 Places.

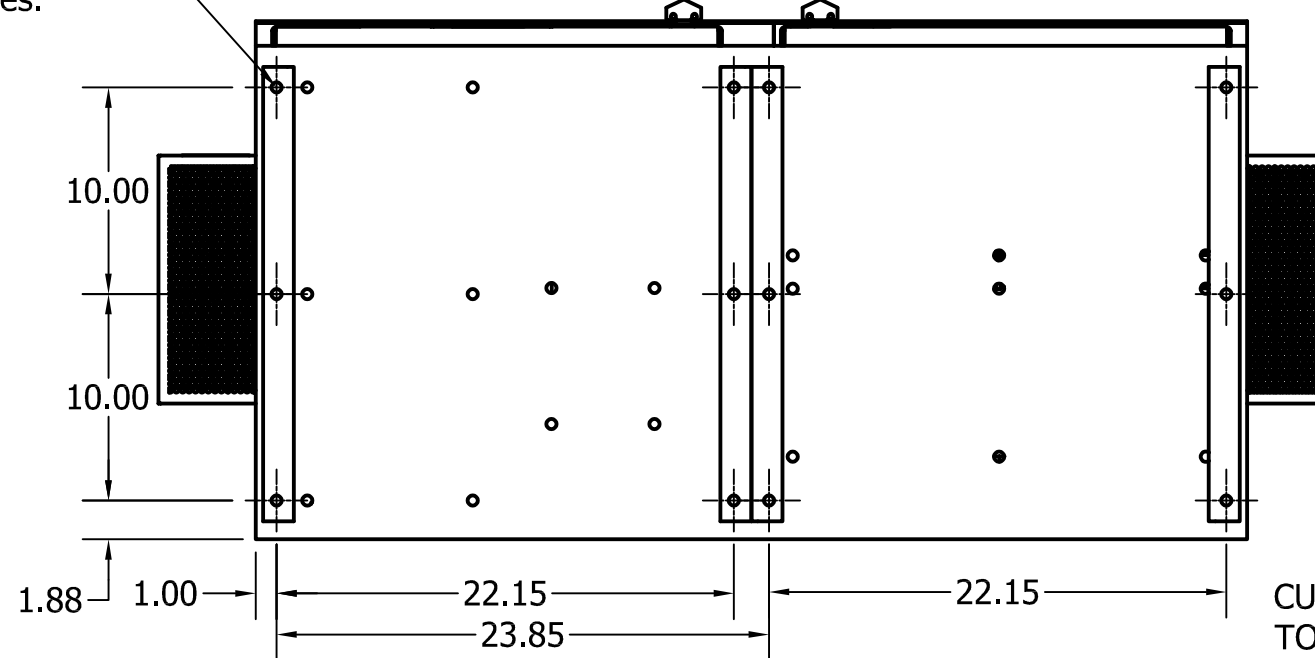

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELETRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES
Material(s) Shall be RoHS Compliant

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREDJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.

NO	REVISION	DATE	BY	SCALE
A	AS DESIGNED	6/2/17	DSW	ANGULAR +/- 1°
NO				

TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX +/- .25 .XXX +/- .12 FRACTIONAL +/- 1/16		TCI ® W132 N10611 Grant Drive Germantown, WI 53022 HGL0400AW3C0000, 480V, 400HP, 3 Phase HGL0400AW3S0000, 480V, 400HP, 3 Phase 60 Hz, Type 3R, Low C, Passive Harmonic Filter
DRN. BY DSW	DATE 6/2/17	
SCALE 1/8	APRVD.	DWG. No. 107039DG SHEET 1 OF 1