
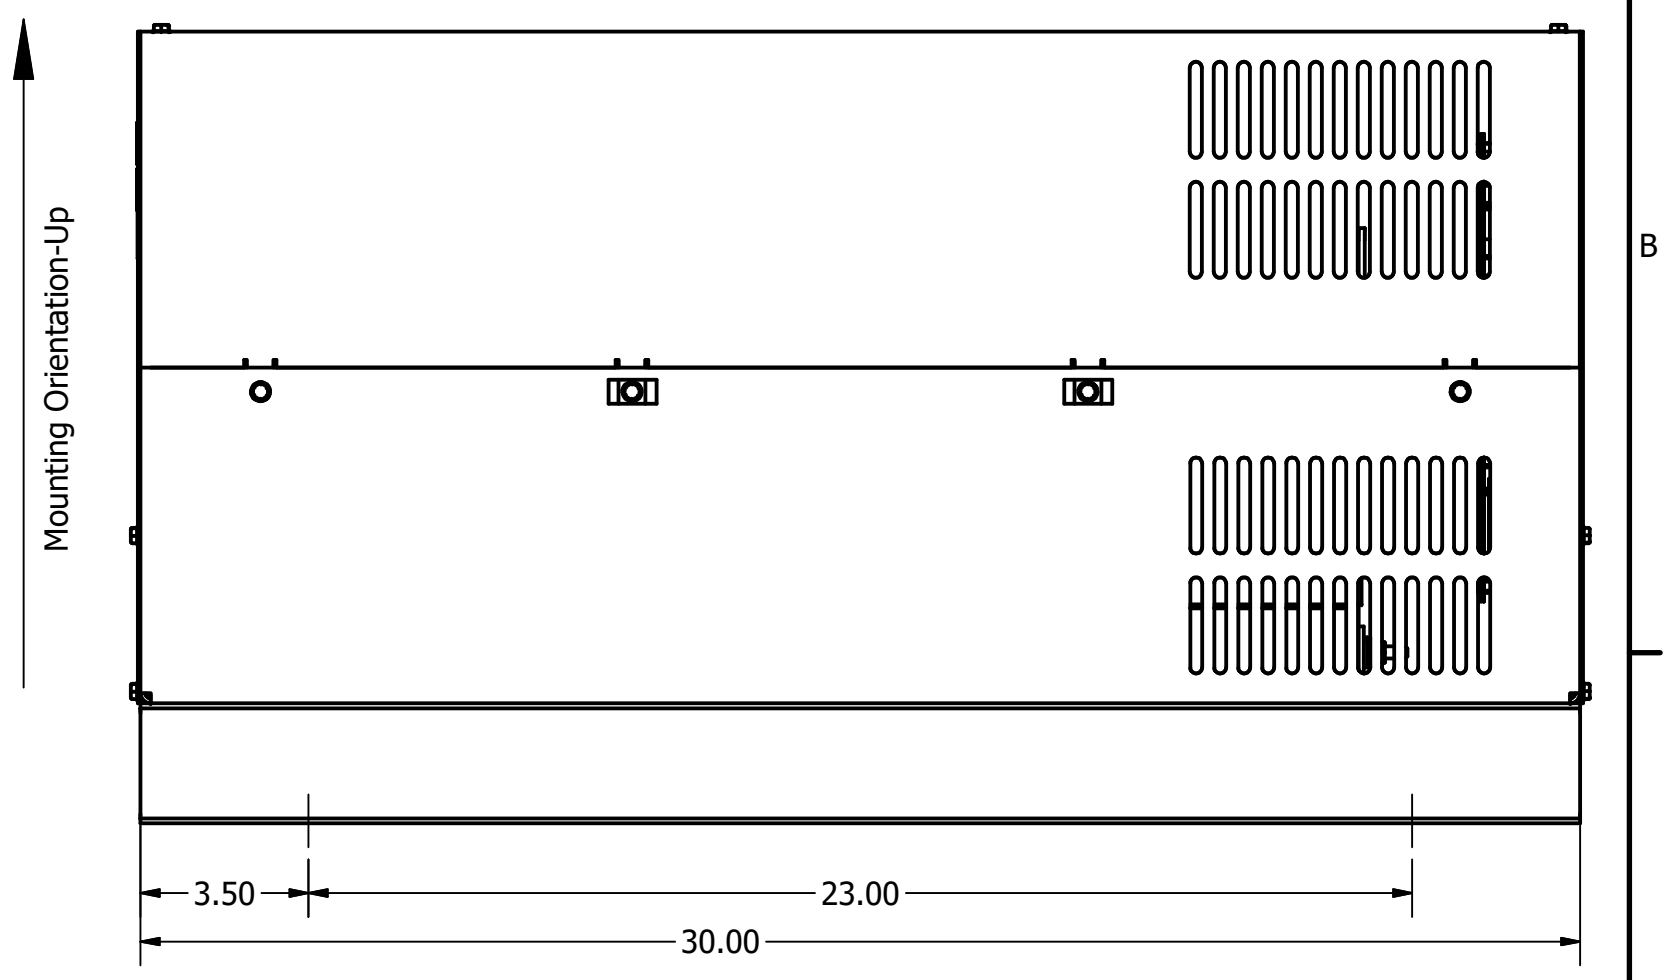
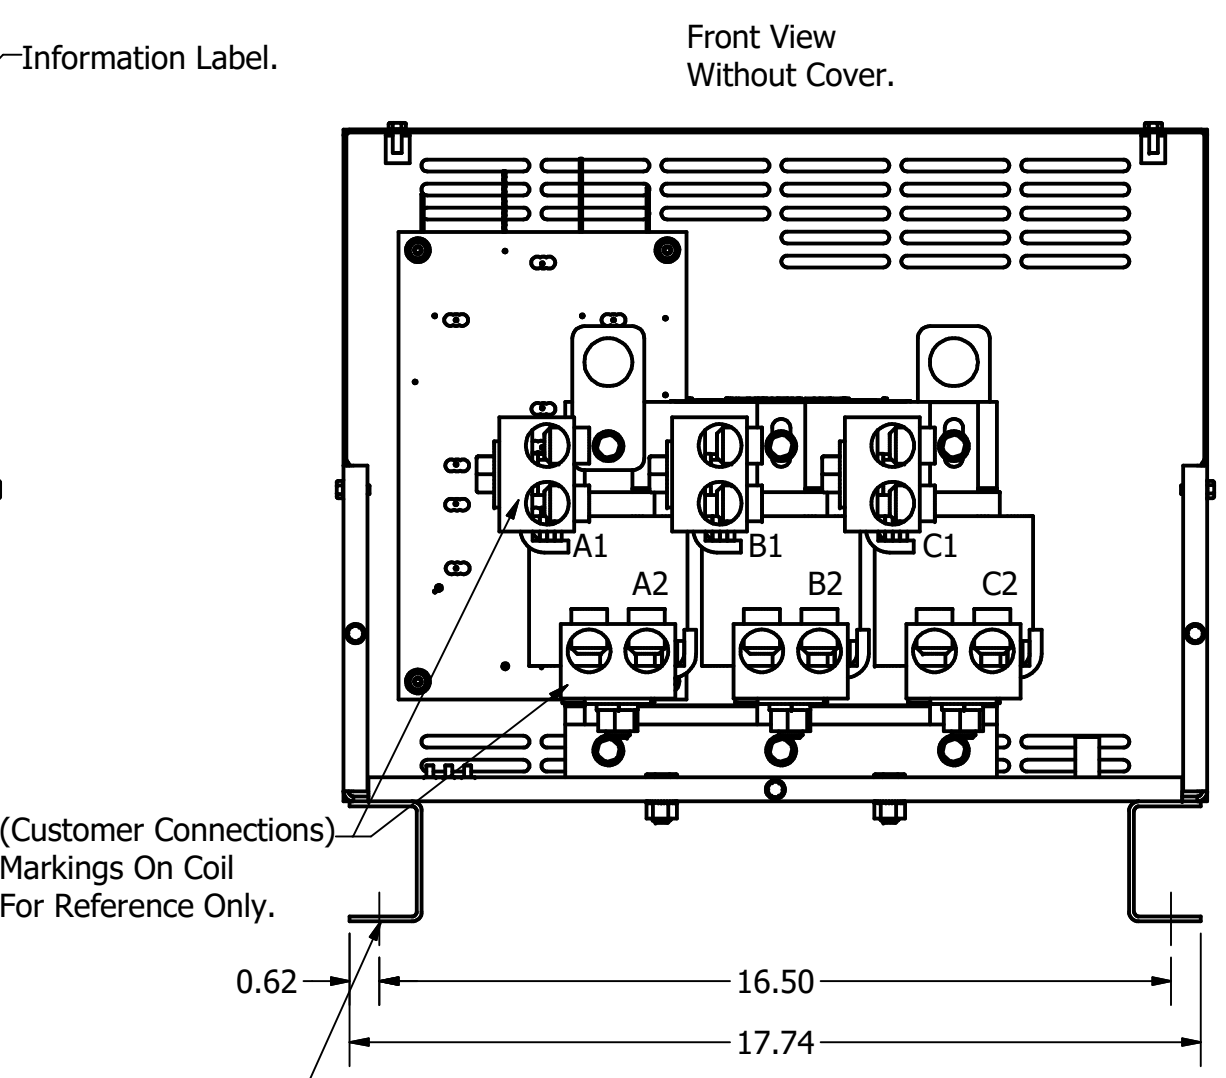
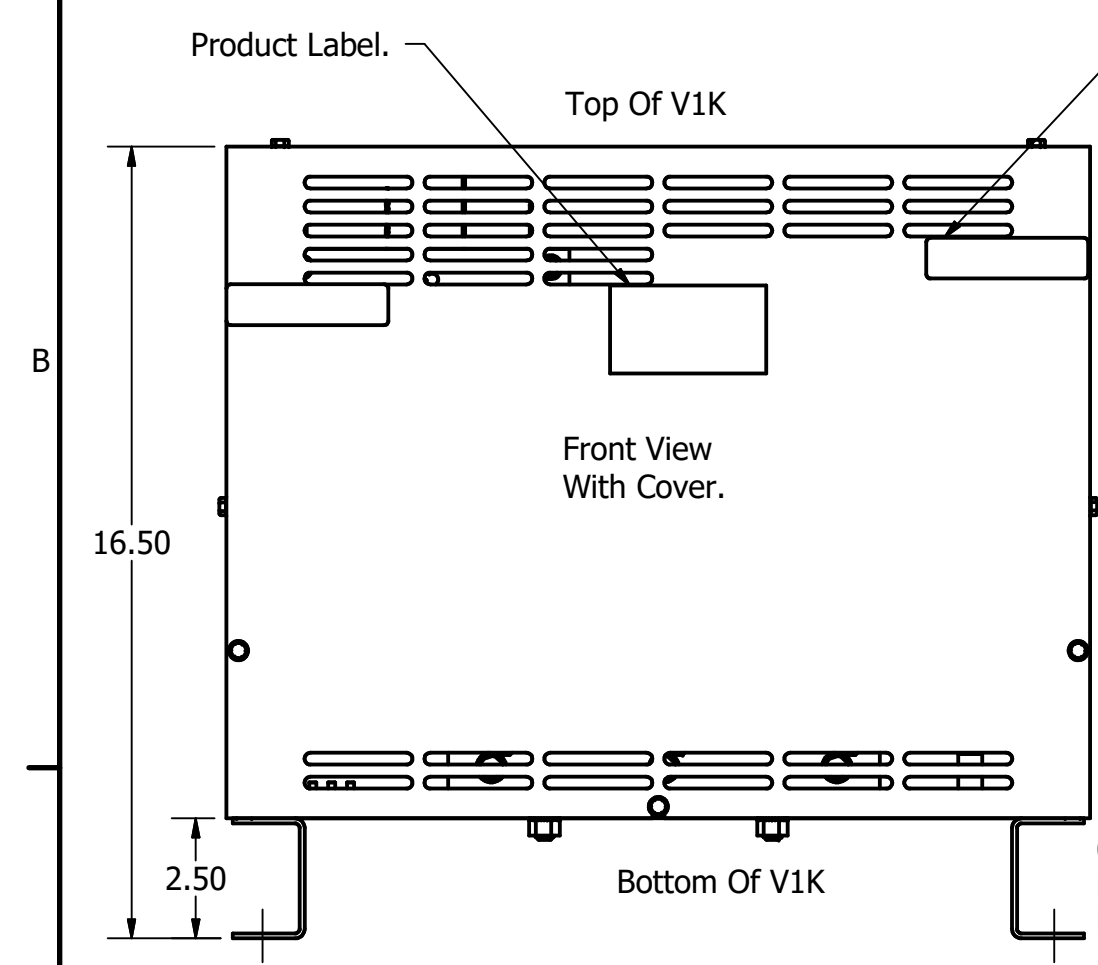


See V1K Installation Guide For Terminal Wire Size And Torque Information.
 Note: Maintain Clearance of 3 Inches On All Sides To Other Equipment.

V1K Part Number	Max Voltage	Amps	Phase	Weight (LBS)
V1K420A01*	600	420	3	132
V1K420A01EX*	600	420	3	132

* = (Blank) - No Thermal Switch
 * = T - Thermal Switch Option

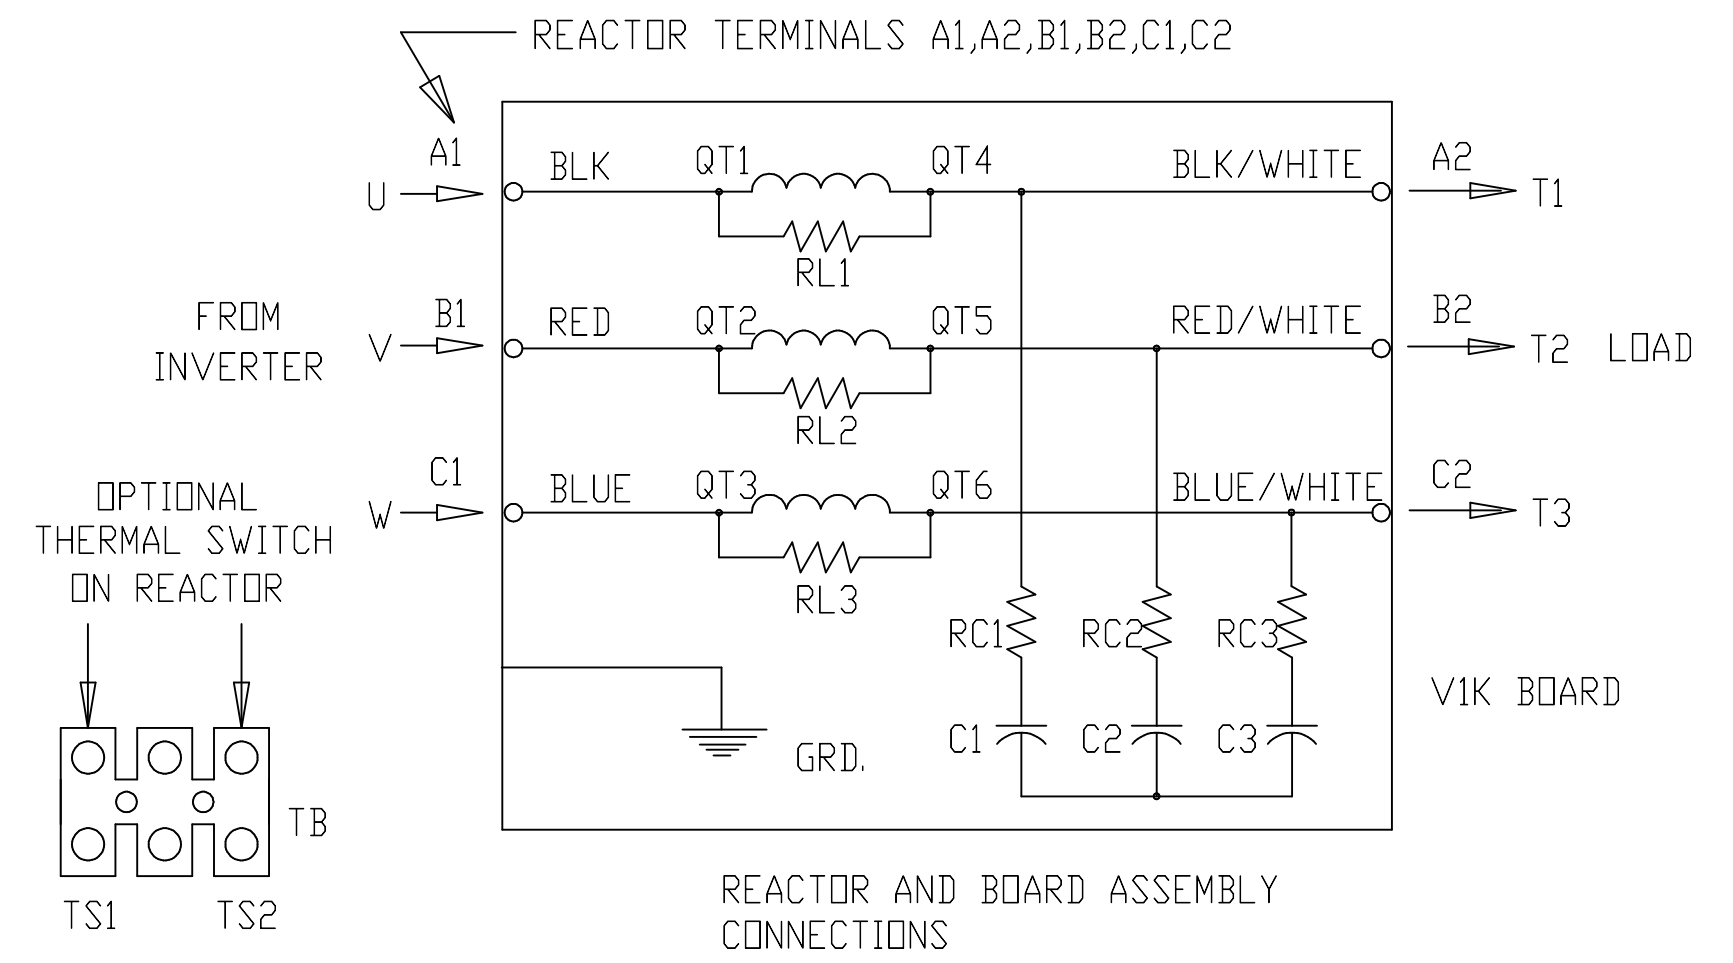

0.41 Dia Mounting Holes - 4 Places.

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes. Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY	ANGULAR ± 1°
I	6032 Added T/S Option	08/31/22	JRN	
H	4658 Rated To Max Voltage	03/04/19	JRN	
G	4030, Combine, Update V1K Drawings	6/23/17	DSW	

TCL W132N10611 Grant Drive
 Germantown, WI 53022
 © 2022 TCL, LLC

An Allied Motion Company

V1K, Enclosed, Type 1
 420 Amps

DRN BY: DSW DATE: 4/26/17
 SCALE: TO FIT APRVD: 102414DG
 SIZE: C SHT 1 OF 1