

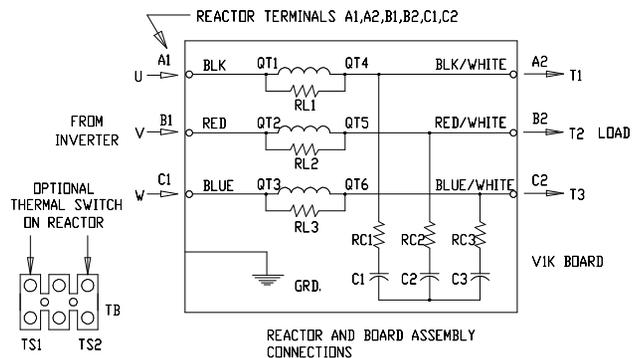
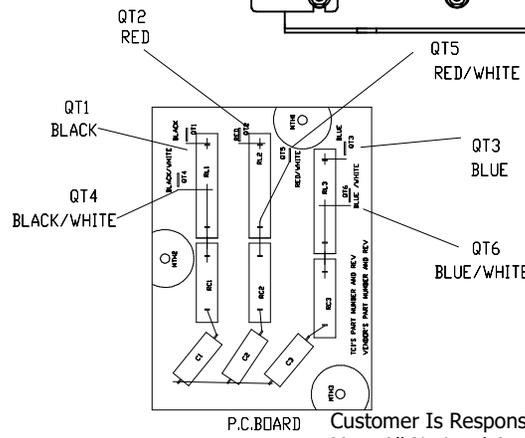
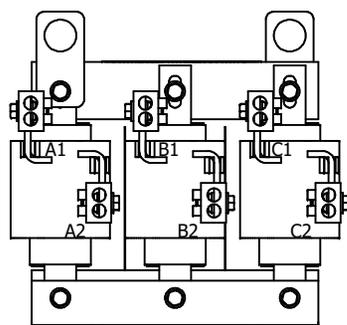
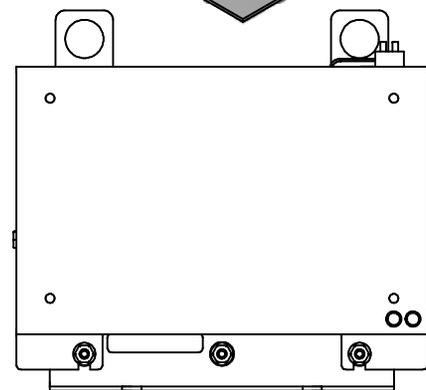


See V1K Installation Guide For Terminal Wire Size And Torque Information.

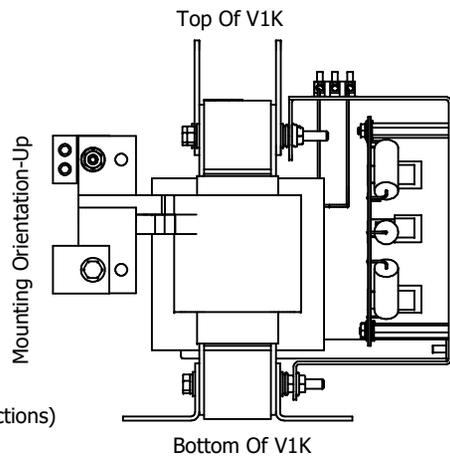

V1K Part Number	Max Voltage	Amps	Weight (LBS)
V1K250A00*	600	250	55

\* = (Blank) - No Thermal Switch  
 \* = T - Thermal Switch Option

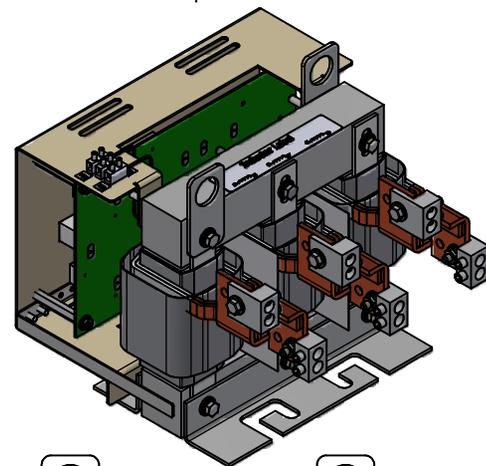

Customer Is Responsible For Installation to Meet All National and Local Electrical Codes. Material(s) Shall be RoHS Compliant

DIMENSIONS IN INCHES (EXCEPT AS NOTED) TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/32 ANGULAR ± 1°		THE INFORMATION AND DESIGN CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.		REV. NO.	DATE	BY	SCALE	SHEET NO.	SIZE
0	7429	Drawing chg.	3/10/26	DSW	1:2.5	102653-2DG	C	SHT. 1 OF 1	



V1K250A00  
 250A, V1K OPEN