
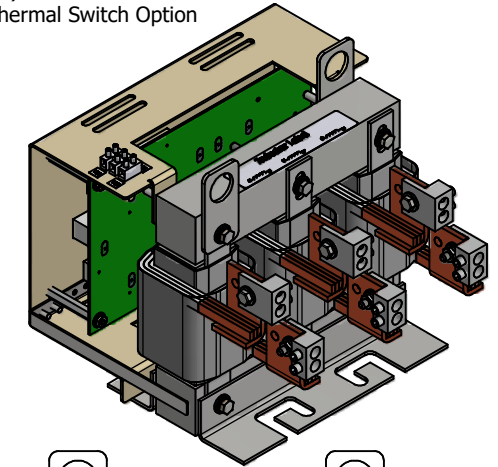
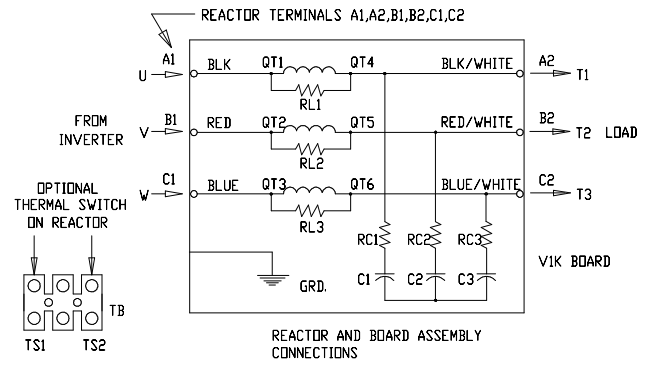




V1K Part Number	Max Voltage	Amps	Weight (LBS)
V1K200A00EX*	600	200	60
V1K250A00EX*	600	250	65

* = (Blank) - No Thermal Switch
 * = T - Thermal Switch Option

See V1K Installation Guide For Terminal Wire Size And Torque Information.

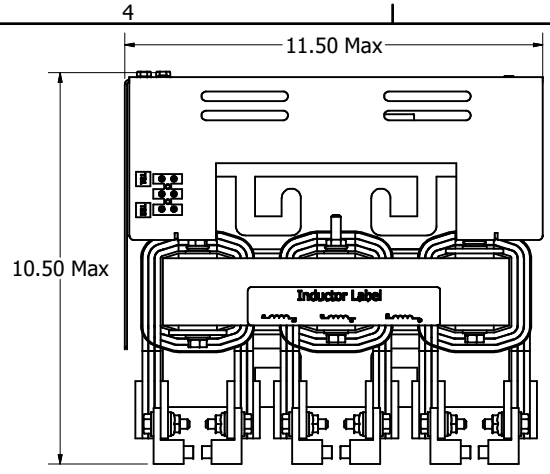



Top Of V1K

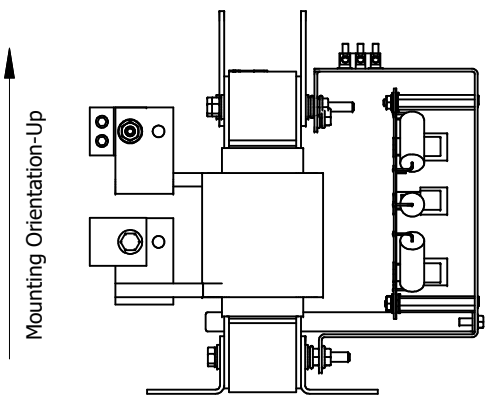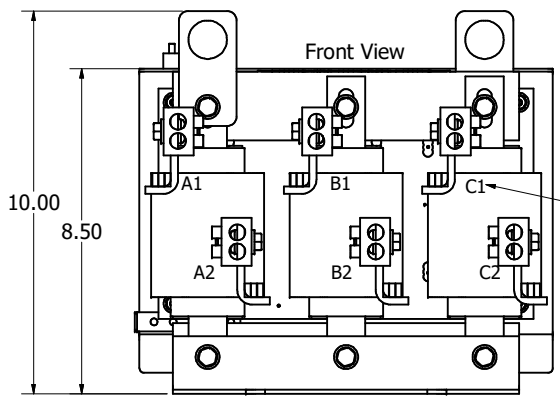

Mounting Orientation-Up

Bottom Of V1K

(Customer Connections) Markings On Coil For Reference Only.

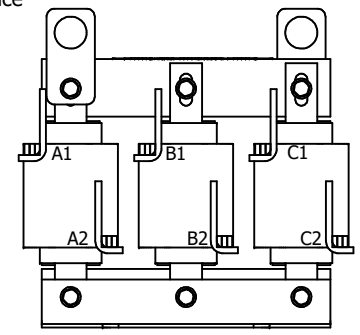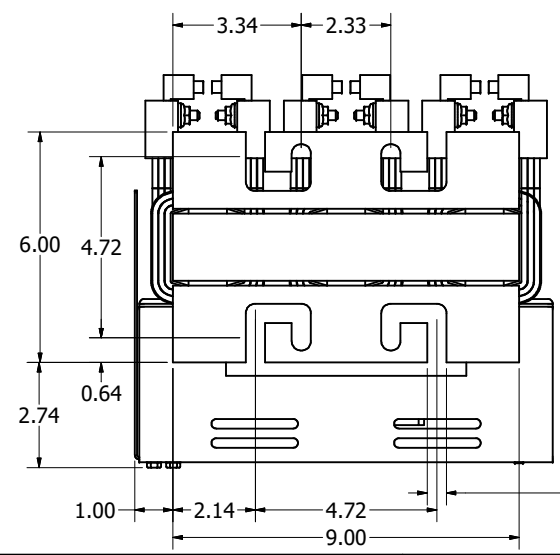

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

DIMENSIONS IN INCHES (EXCEPT AS NOTED) TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/32 ANGULAR ± 1°		THE INFORMATION AND DESIGN CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.		DESIGNED BY: DSW DATE: 04/26/17 DRAWN BY: DSW DATE: 3/13/26 SCALE: 1/2 DSN NO: 102653DG SIZE: C SHEET: 1 OF 1	
NO	ECO	7429	Remove Standard V1K, Match Revs	3/13/26	DSW
REVISION		DATE		BY	



V1K200A00EX, V1K25000E
 V1K Open, 200Amps, 250Amps