


See V1K Installation Guide For Terminal Wire Size And Torque Information.

Note: Maintain Clearance of 3 Inches On All Sides To Other Equipment.

V1K Part Number	Max Voltage	Amps	Phase	Weight (LBS)
V1K160A03*	600	160	3	85

\* = (Blank) - No Thermal Switch






\* = T - Thermal Switch Option

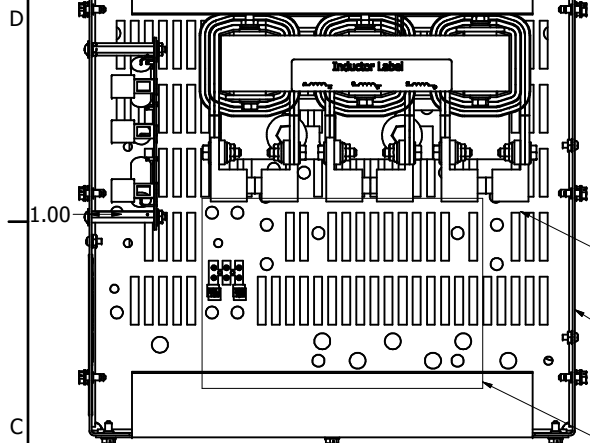

(Customer Connections) Markings On Coil For Reference Only.

Suggested Customer Entry Side Of Enclosure.

Suggested Customer Entry Bottom Of Enclosure.

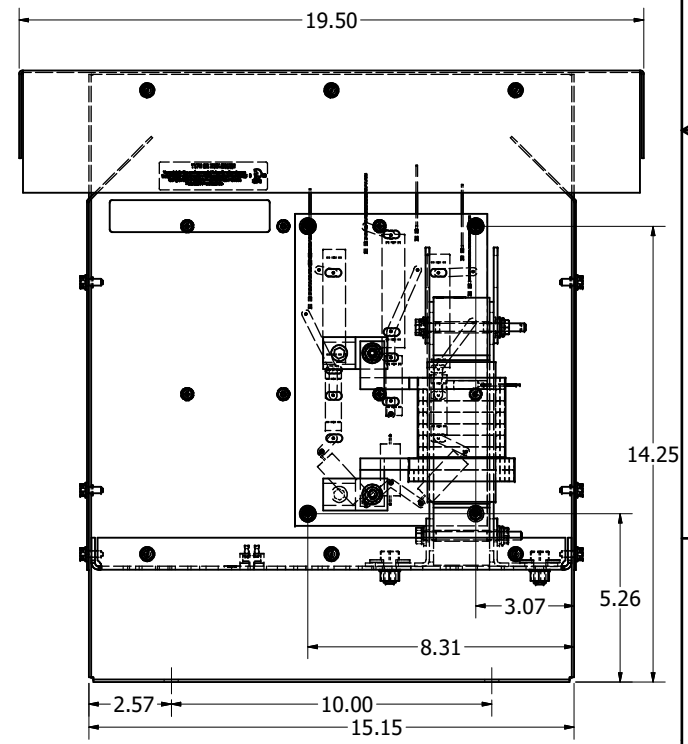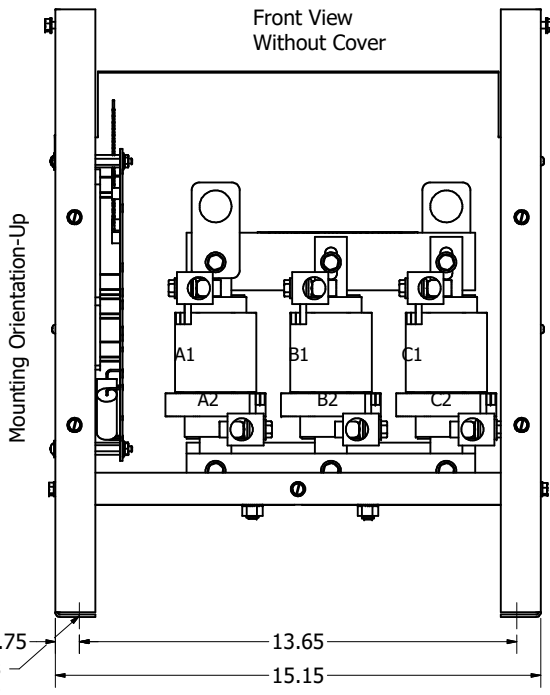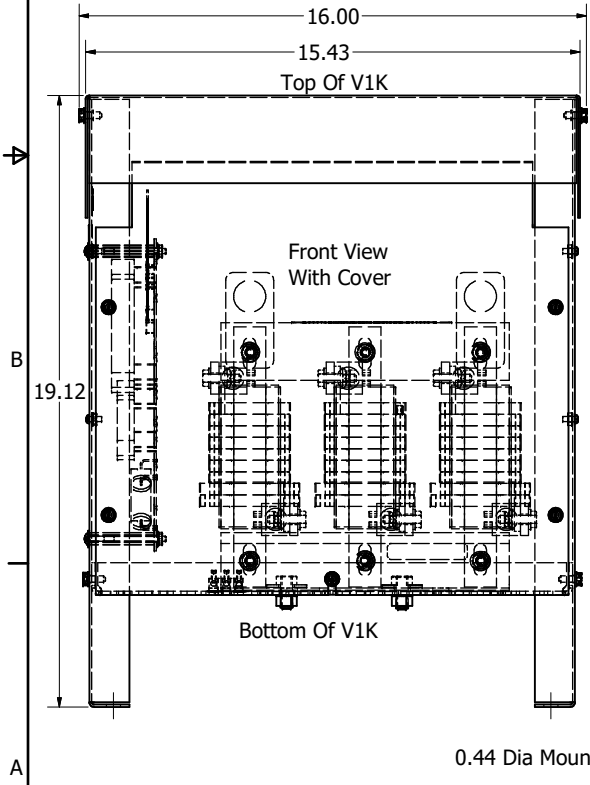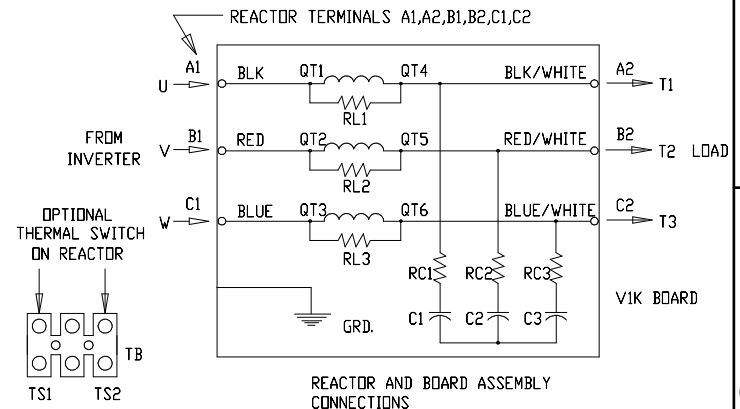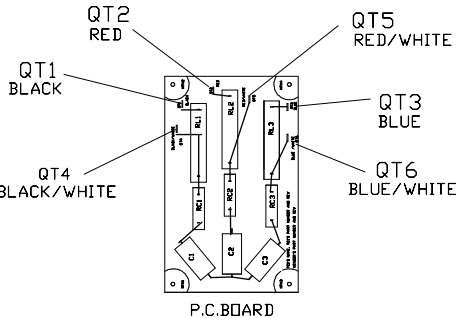

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES

DIMENSIONS IN INCHES (EXCEPT AS NOTED) TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/32 ANGULAR ± 1°

NO	ECO	REVISION	DATE	BY
G	7418-1	Terminal Flag Change Drawing Change	03/04/26	DSW

DESIGNED BY	DATE	SCALE	DRAWN BY	DATE	BY
DSW	03/04/26	1/3	DSW	03/04/26	DSW

Material(s) Shall be RoHS Compliant

W132N10611 Grant Drive Germantown, WI 53022 © 2026 Allient Inc.

V1K160A03  
160A, V1K Type 3R

104232-1DG