
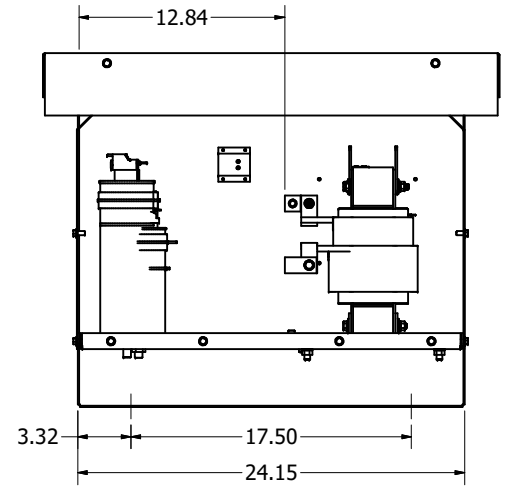
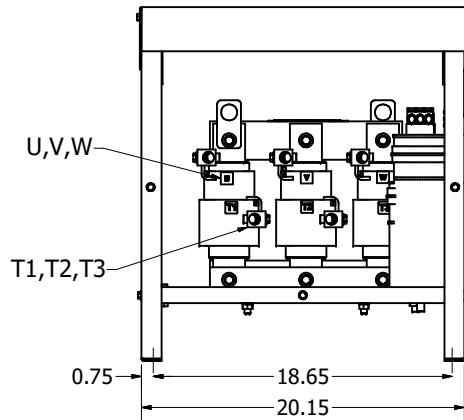


Thermal Switch Connections, Located Above Capacitor.

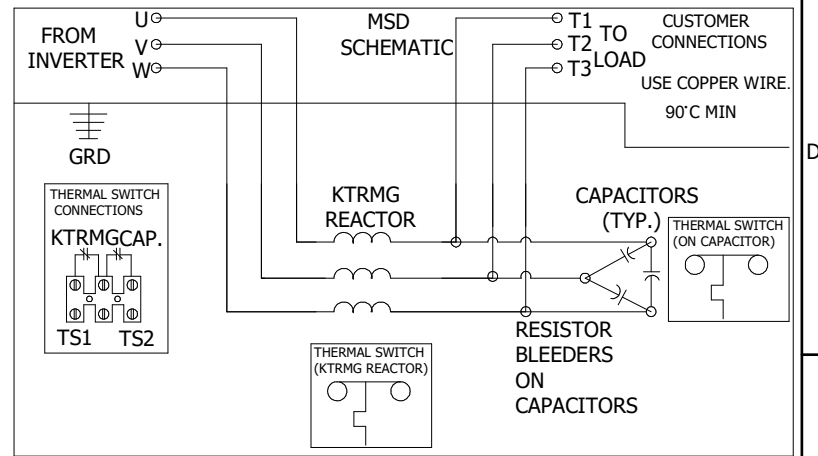

MSD PART NUMBER	HP	VOLTAGE	CURRENT	WEIGHT	PRESSURE TERMINAL WIRE RANGE
MSD0065A300	50	480V	65 AMPS	144 LBS	2/0-14 AWG
MSD0080A300	60	480V	80 AMPS	162 LBS	2/0-14 AWG
MSD0110A300	75	480V	110 AMPS	177 LBS	2/0-14 AWG
MSD0130A300	100	480V	130 AMPS	187 LBS	250MCM- 1 AWG


Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
E	6320, Inductor update for 80 to 130 Amps	6/26/2023	DSW

TOLERANCES (EXCEPT AS NOTED)  
 DECIMAL  
 .XX ± .25  
 .XXX ± .10  
 FRACTIONAL  
 ± 1/32  
 ANGULAR  
 ± 1°


 W132N10611 (Rev 13 Feb 2023)  
 Germantown, WI 53022  
 © 2023 TCI, LLC  
 An Official **Motors** Company  
 MSD 65 to 130 Amps  
 MotoShield, 480V, Type 1/3R  
 DESIGNED BY: DSW DATE: 4/27/2015  
 SCALE: 1/6 DRAWN BY: CSE  
 105797DG  
 SHEET 1 OF 1