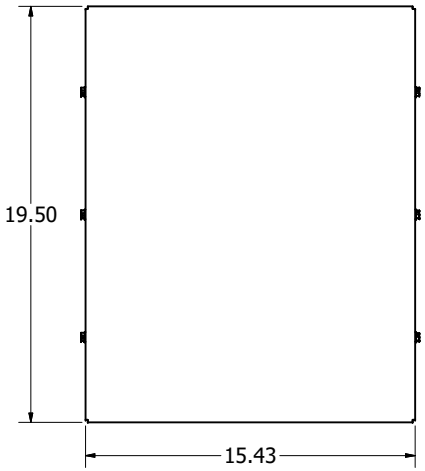

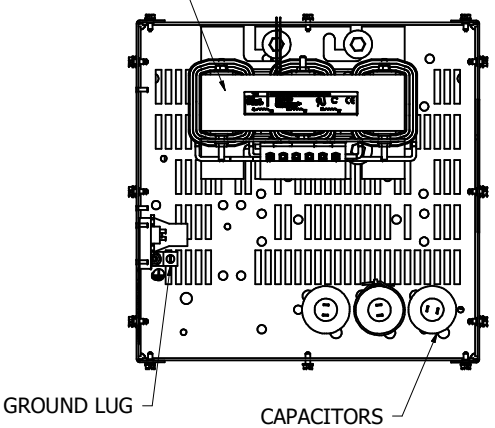

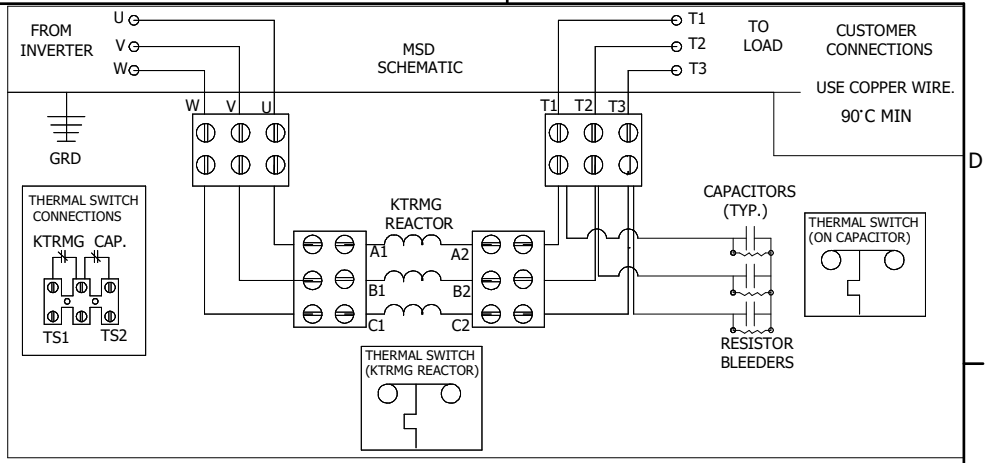

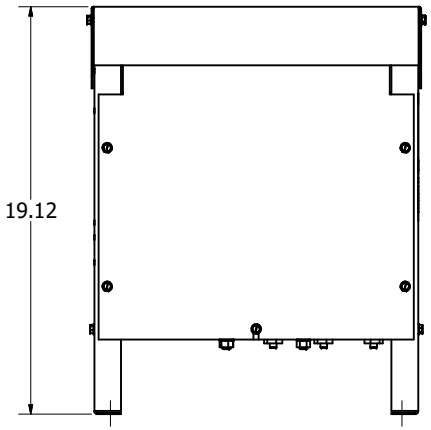

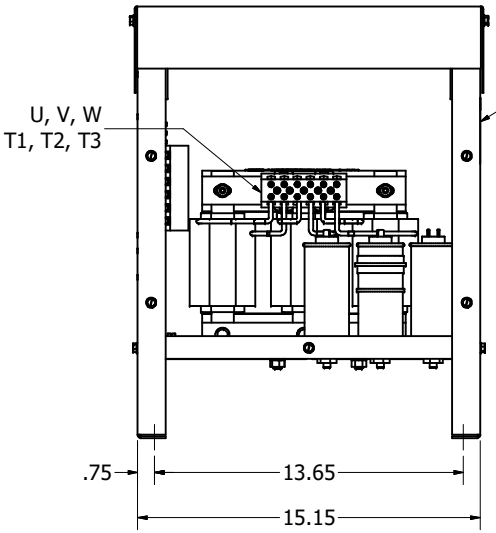

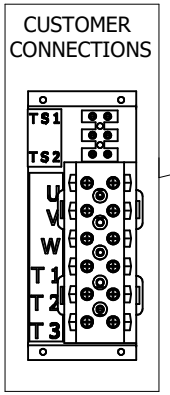

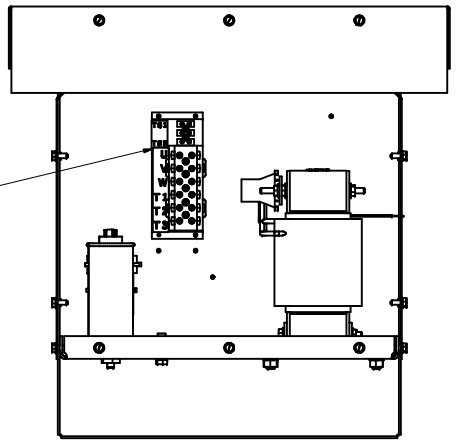

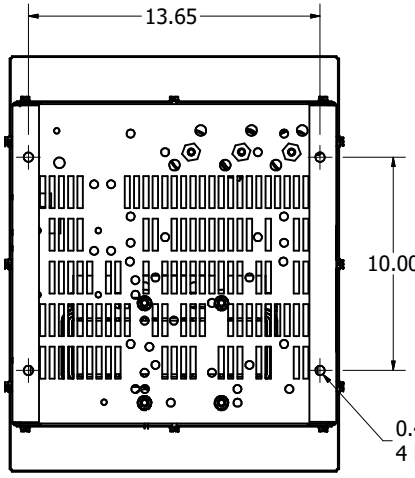

NOTE: FOR WIRE RANGE AND TORQUE INFORMATION SEE IOM MANUAL.

MSD PART NUMBER	HP	VOLTAGE	CURRENT	WEIGHT	TERMINAL BLOCK WIRE RANGE	GROUND LUG WIRE RANGE
MSD0022B300	7.5	240V	22A	90 LB	1-22 AWG	1/0-14 AWG

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
D	Removed MSD logo	2/16/24	JSG
C	3696, Add discharge	8/01/16	DSW
B	3345, Enclosure Update	9/08/15	DSW
A	As built	8/10/15	BWM

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .03
.XXX ± .010
FRACTIONAL
± 1/32
ANGULAR
± 1°

TCI An Allied Motion Company
W132N10611 Grant Drive
Germantown, WI 53022
© 2022 TCI, LLC

MSD0022B300 MotorShield
Sinewave Filter 240/3/60, Type 1/ 3R

DRN. BY: BWM
DATE: 8/10/15
SCALE: 1:4.25
APRVD:
SIZE: C
106102DG
SHT 1 OF 1