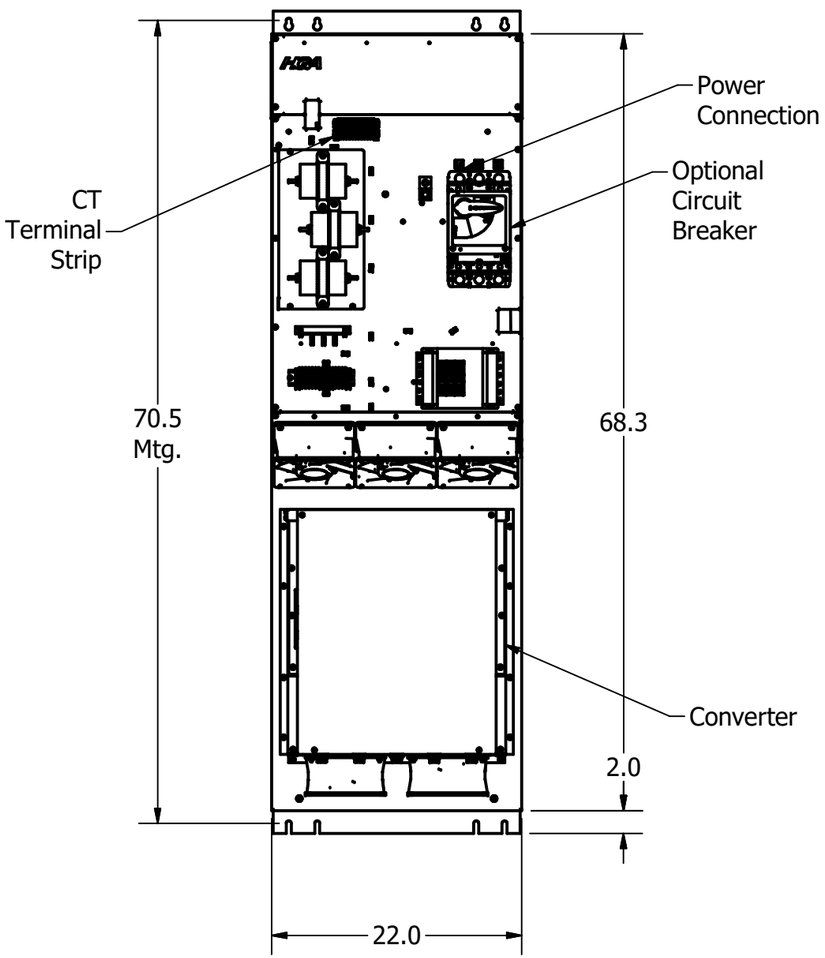

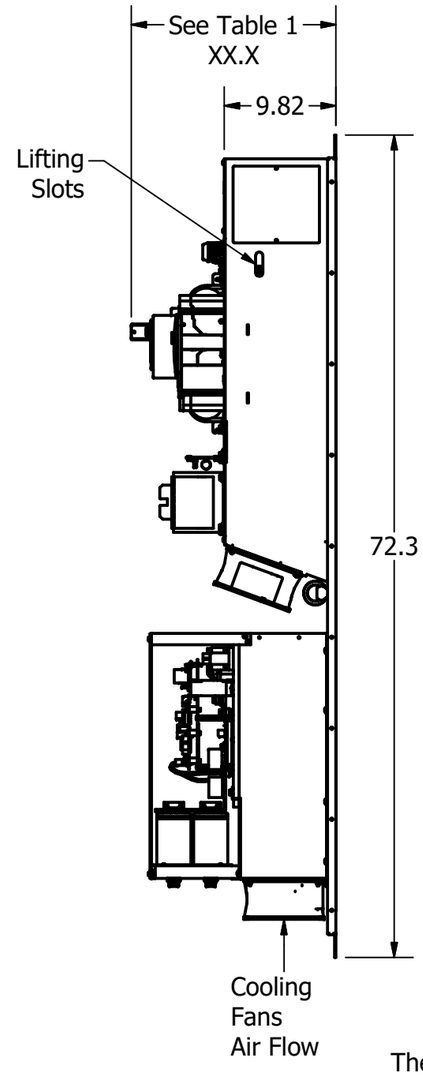

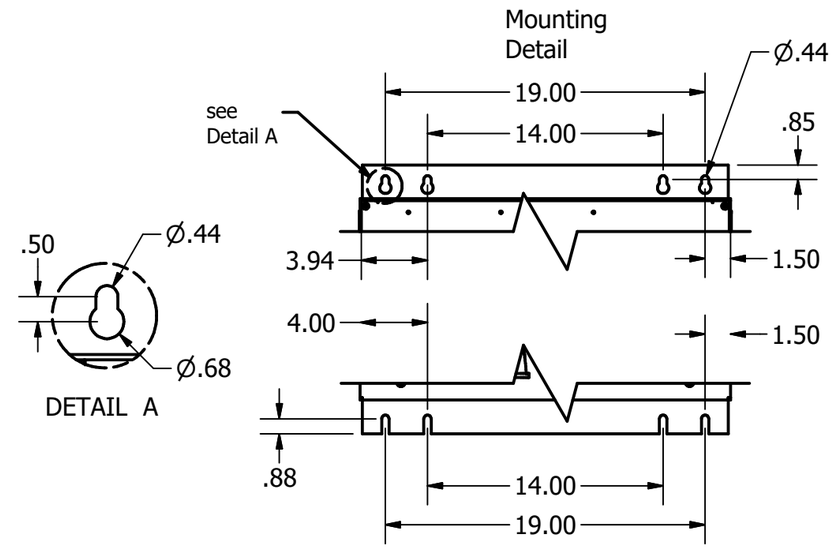

Chassis Depth, Inches (mm)		
Breaker (Mfr, Series)	Circuit Breaker Only	Breaker with Handle Mech.
ABB - T5	15.29 (388)	16.79 (426)
Eaton LG	15.14 (385)	17.04 (433)
Rockwell 140G	14.42 (366)	16.6 (422)

The 200A unit is rated for 150A when applied with a 480V/600V autotransformer

The 250A unit is rated for 185A when applied with a 480V/600V autotransformer

Drawings:
General Schematic: #29853
Customer Connection: #25027-3
Cooling Drawing: #30003
Interface/Display Module: #28282-1 & #28283-1
Current Transformer: #26461

Notes:
Weight lbs (Kg) 565 (256).
Front view is shown with cover removed over the converter.
Total heat loss:
200A: 6,930 watts, 23,646 Btu/h.
250A: 8,750 watts, 29,856 Btu/h.
Interface/Display Module is supplied loose for remote mounting, cables included.
Additional depth may be required for breaker door handle mechanism.

NO	REVISION	DATE	BY
C	added 600V rating notes	12/17/18	MJS
B	3744: ADDED 200A INFO	9/23/16	MJS
A	PRODUCT RELEASE	5/5/16	MJS

TOLERANCES (EXCEPT AS NOTED)
DECIMAL .XX ± .05 .XXX ± .025
FRACTIONAL ± 1/32
ANGULAR ± 1°

TCI
W132 N10611 Grant Drive
Germantown, WI 53022

OUTLINE, INSTALLATION
200A/250A ACTIVE FILTER, CHASSIS

DRN. BY MJS | DATE: 1/13/16 | 106318
SCALE: yes | APRVD: | SIZE B | SHT.1 OF 1