




Top View

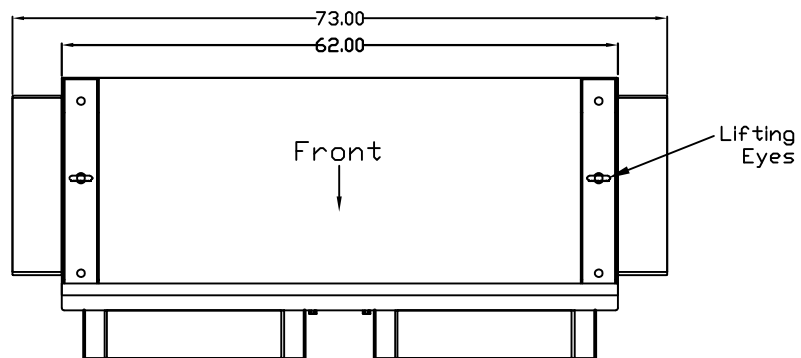


Front View

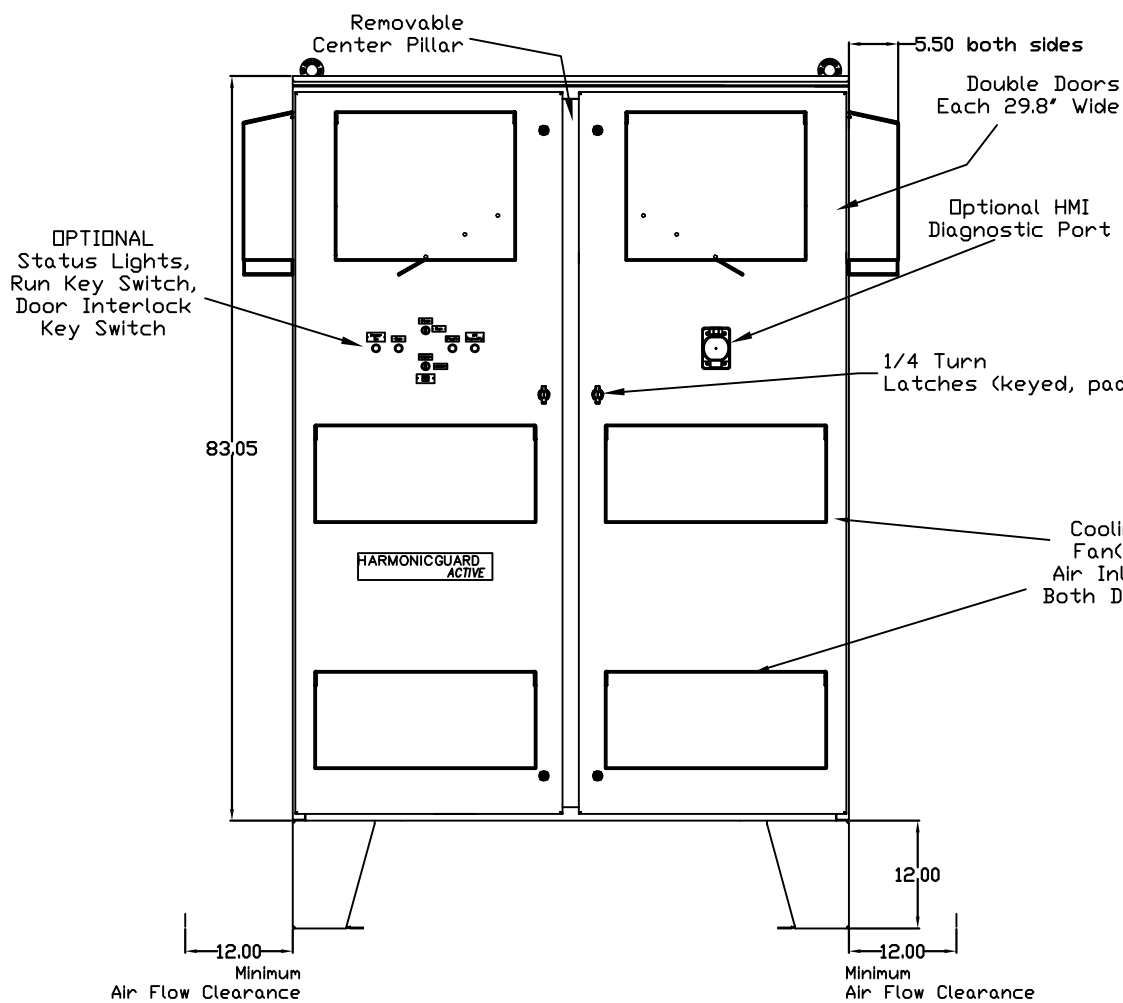

Side View

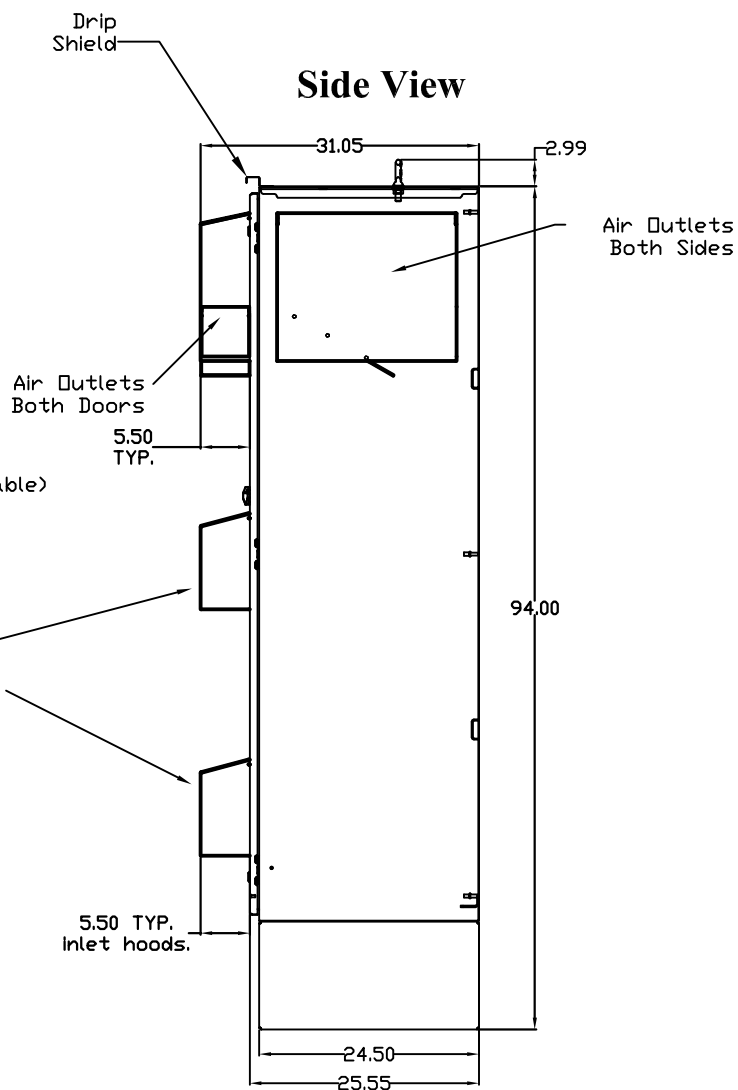


Bottom View

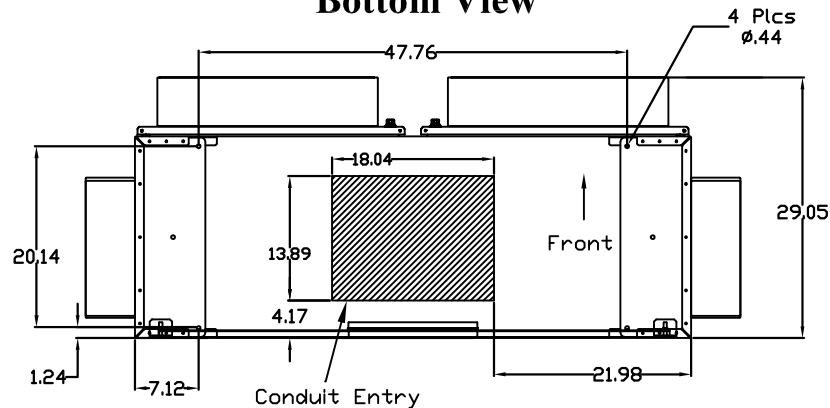

NOTES:

- 1) Refer to Interface/Display module: 28282-1 & 28283-1.
- 2) Total heat dissipation:
400A: 15,000 watts, 51,182 Btu/hr.
500A: 18,500 watts, 63,125 Btu/hr.
- 3) Weight in Lbs (kg): 1965 Lbs (891.3 Kg).
- 4) General Schematic drawing: 30010.
- 5) Current transformer drawing: 26461.
- 6) Customer Connection Diagram: 25027-3.
- 7) The 400A unit is rated for 300A when applied with a 480V/600V autotransformer
- 8) The 500A unit is rated for 370A when applied with a 480V/600V autotransformer

Internal View

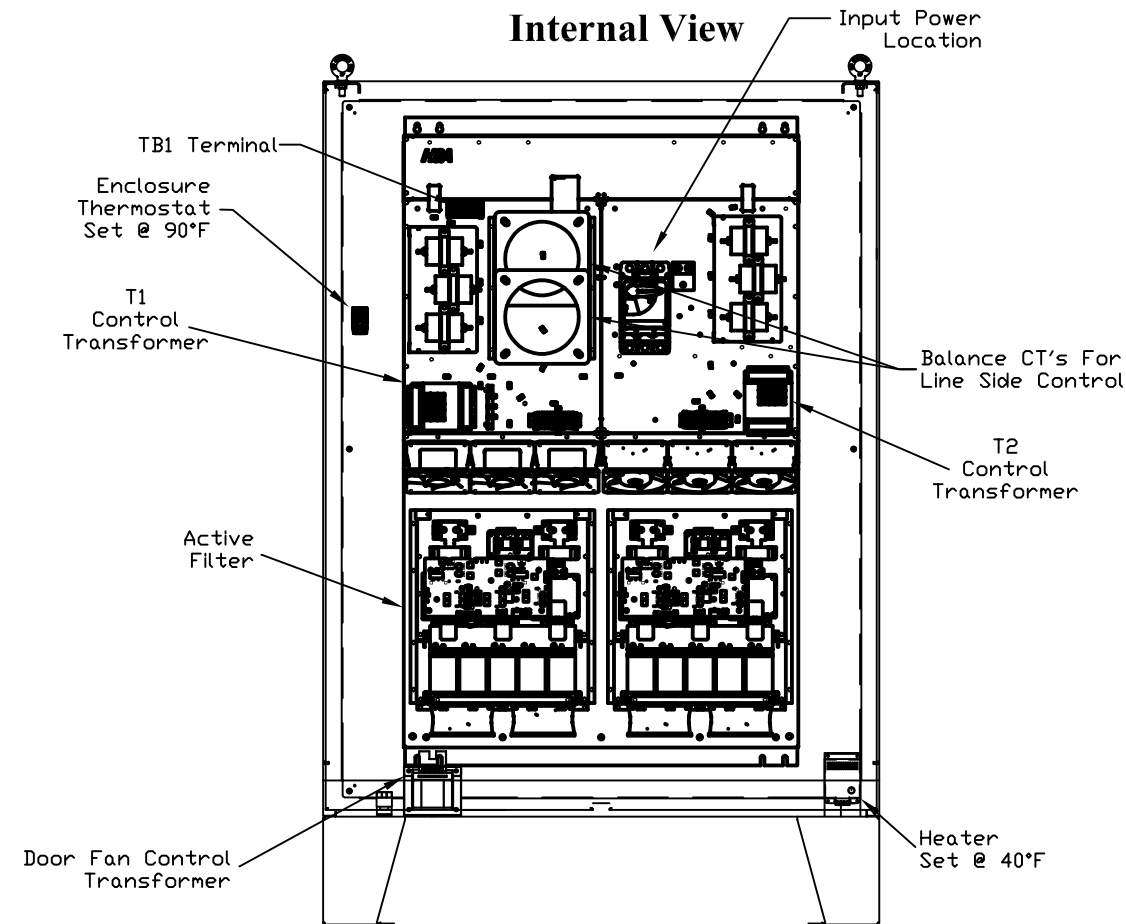

Dimensions are in Inches


G	5641 clearance note	6/22/21	JSG	TOLERANCES (EXCEPT AS NOTED)
F	watt loss update	10/7/20	MJS	DECIMAL
E	added 600V rating notes	12/18/18	MJS	.XX ± .05
D	Change thermostst	4/23/18	RHW	.XXX ± .025
C	cooling improvements	1/5/17	MJS	FRACTIONAL ± 1/32
B	added 400A info	9/23/16	MJS	ANGULAR ± 1°
NO	REVISION	DATE	BY	

TCI W132 N10611 Grant Drive
Germantown, WI 53022


Enclosure, Type 3R,
400A/500A Active Filter


DRN. BY	MJS	DATE	6/2/16	DWG. NO.	B 106427
SCALE	N/A	APPRVD.			SHT.1 OF 2

OPTIONAL
Door Operator Detail

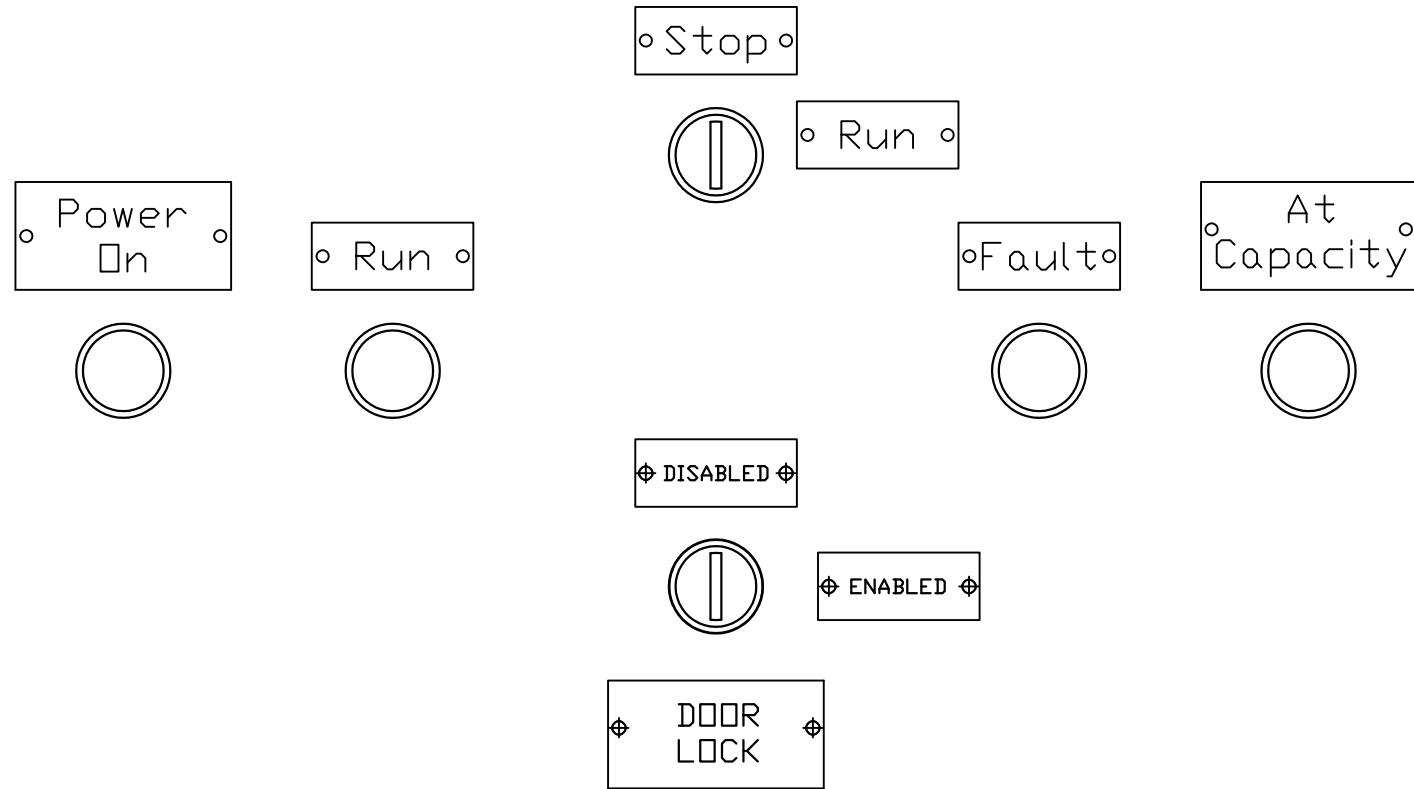

NO Door Operators

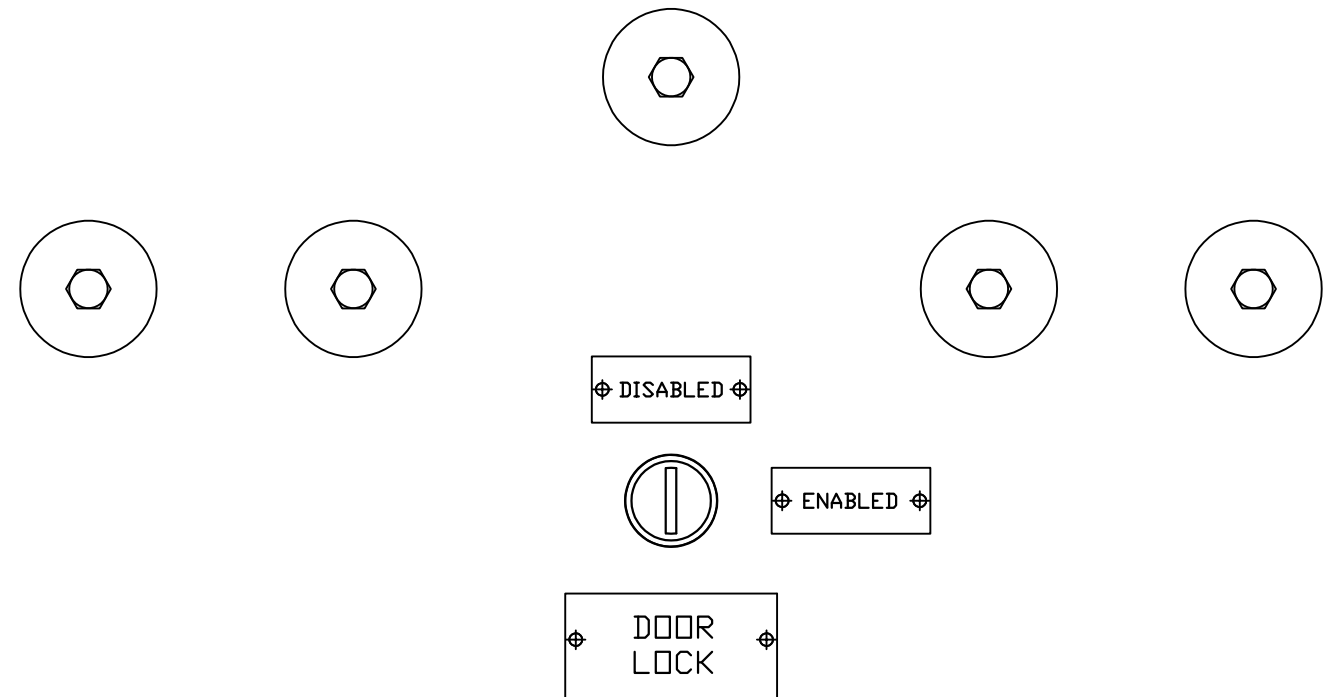

				TOLERANCES (EXCEPT AS NOTED)	 W132 N10611 Grant Drive Germantown, WI 53022
				DECIMAL	
				.XX ± .05 .XXX ± .025	
				FRACTIONAL ± 1/32	
	SEE REV PAGE 1			ANGULAR ± 1°	DRN. BY MJS DATE 6/2/16 SCALE N/A APRVD.
NO	REVISION	DATE	BY		DWG. NO. B 106427 SHT. 2 OF 2