


NOTE:
 REFER TO GENERAL SCHEMATIC: 30012
 REFER TO CUSTOMER CONNECTION DIAGRAM: 28496-1
 INTERFACE DISPLAY MODULE DRAWING: 28282-1
 CURRENT TRANSFORMER DRAWING: 26461

WEIGHT: 2382 Lbs [1081 Kg]
 TOTAL HEAT LOSS:
 400A : 15,350 W [52,376 BTU/Hr]
 500A : 18,850 W [64,319 BTU/Hr]

FINISH: ANSI-61 GRAY POWDER COAT INSIDE AND OUT. SUB PANEL IS POWDER COATED WHITE.

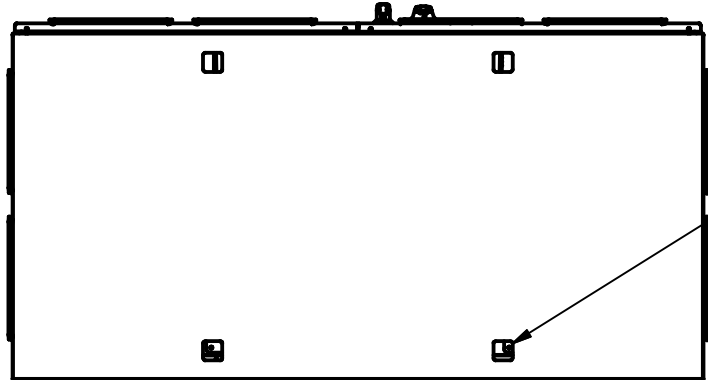

PLUGGED DRAIN HOLES
 4 PLCS

The 400A unit is rated for 300A when applied with a 480V/600V autotransformer.
 The 500A unit is rated for 370A when applied with a 480V/600V autotransformer.

HOLE TOLERANCE ± .005

				TOLERANCES (EXCEPT AS NOTED)	W132 N10611 Grant Drive Germantown, WI 53022
				DECIMAL	
				.XX ± .03 .XXX ± .010	
B	watt loss, compact HMI upgrade	10/7/20	MJS	FRACTIONAL	Outline, Installation, Active Filter 400A / 500A Type 12
A	added 600V rating notes	12/18/18	MJS	± 1/32	
0	New Product	9/29/17	MJS	ANGULAR	DRN. BY: MJS
NO	REVISION	DATE	BY	± 1°	DATE: 9/29/17
					SCALE: yes
					APRVD:
					106429
					SIZE B
					SHT.1 OF 1