
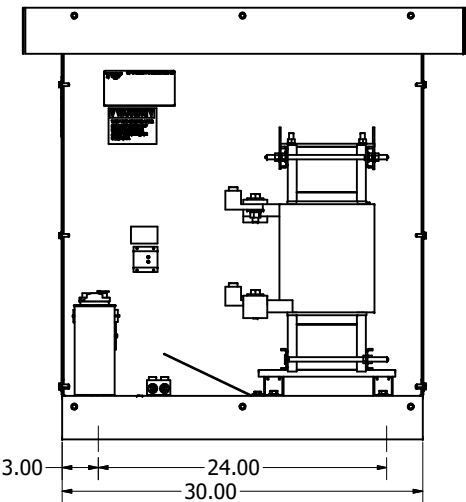
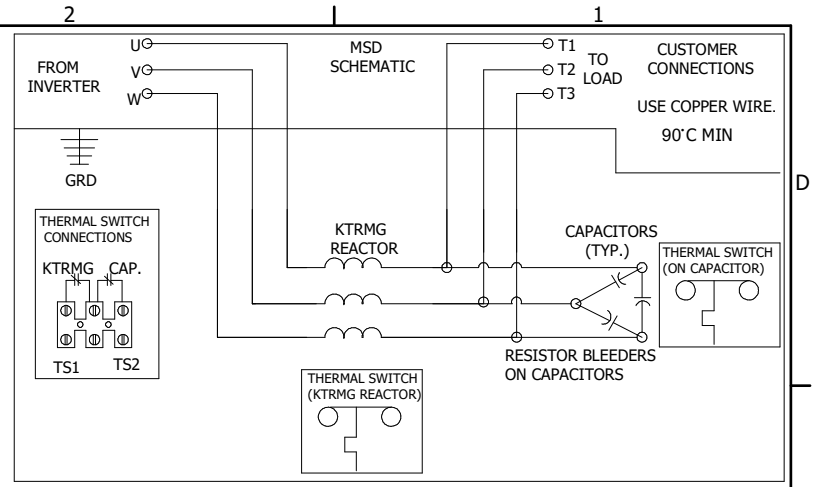


NOTE: NUMBER OF CAPACITORS,  
VARIES WITH HORSEPOWER.

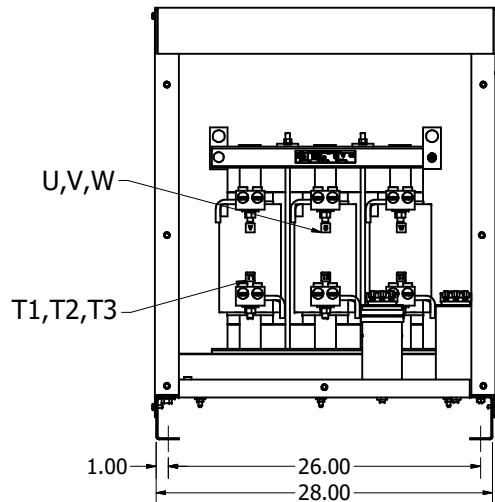

NOTE: FOR TERMINAL TORQUE  
SEE IOM MANUAL.

MSD PART NUMBER	HP	VOLTAGE	CURRENT	WEIGHT	PRESSURE TERMINAL WIRE RANGE
MSD0362C300	350	600V	362 AMPS	525LBS	(2) 350MCM-6AWG
MSD0420C300	400	600V	420 AMPS	550LBS	(2) 350MCM-6AWG

CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.					TOLERANCES (EXCEPT AS NOTED)	W132N10611 (Rev 13 Feb) Germantown, WI 53022 © 2024 TCI, LLC	
					DECIMAL		
					.XX ± .03 .XXX ± .010		
					FRACTIONAL		
	B	3696 Add Discharge	8/1/16	DSW	± 1/32	106431DG	
	A	As Designed	4/13/16	BWM	ANGULAR	MSD 362A to 450A Sinewave Filter	
	NO	REVISION	DATE	BY	± 1°	OWN BY BWM DATE 4/13/16 SCALE: 1:8 DRAWN BY C	