

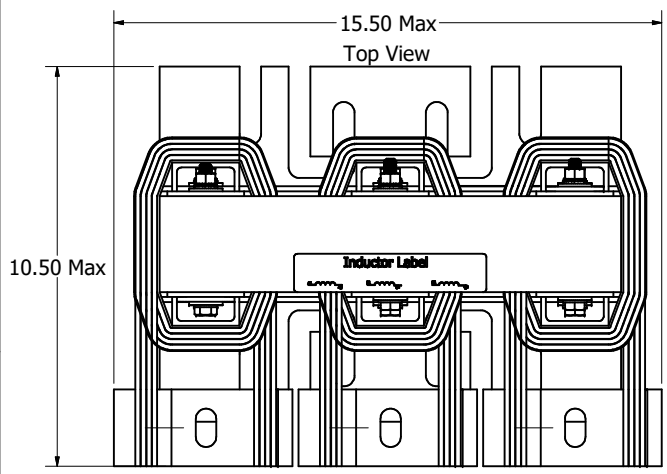

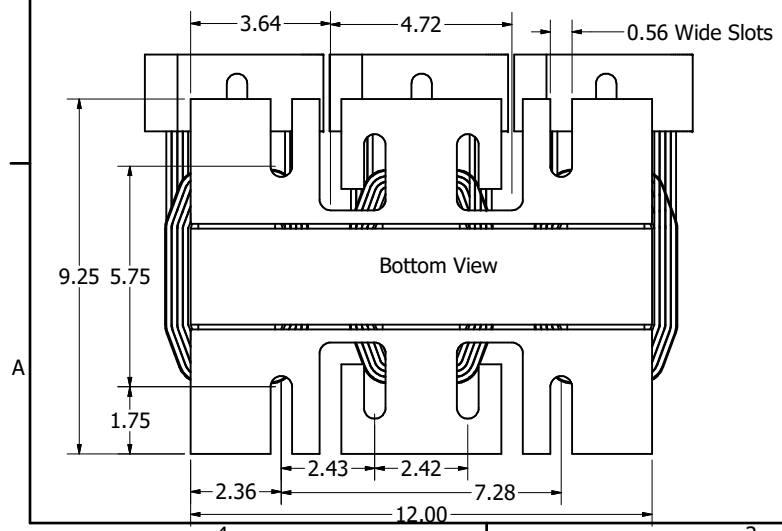
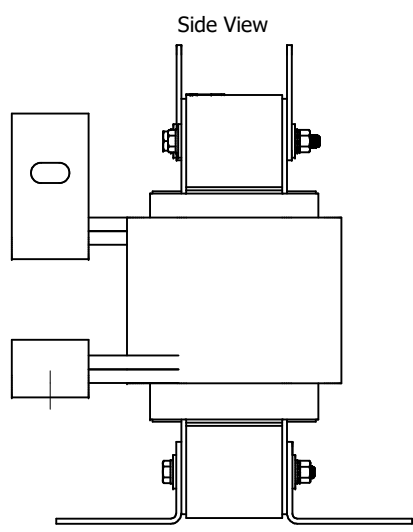


480 Rated Voltage, 600 Max Voltage, Low Z, Impedance.							
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Available Lug Kit	Terminal Hole Size (Inches)
KDRL3L	600	720	750	26	105	SLK15	0.53 X 1.00 Slot

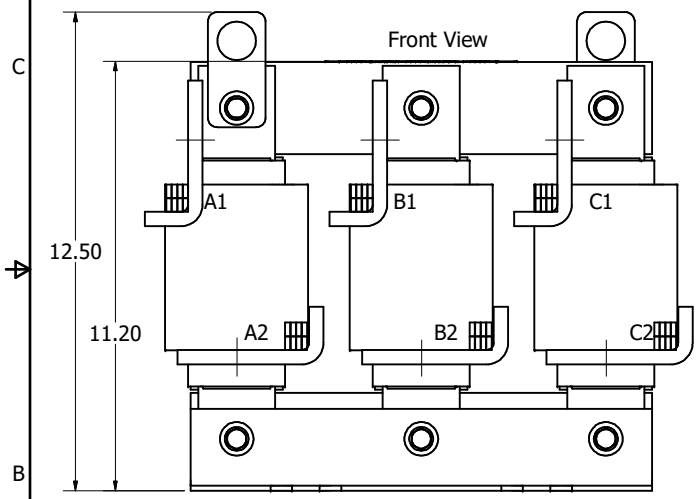

(Customer Connections)
Markings On Coils
For Reference Only.

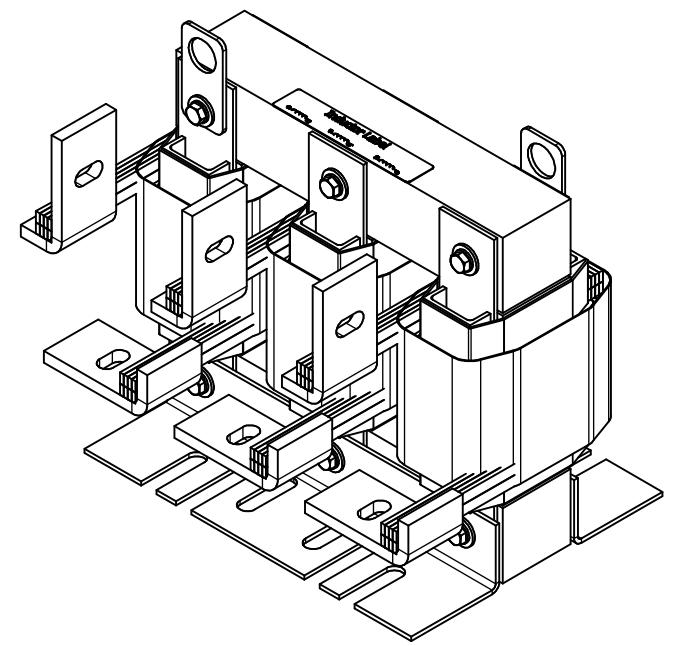

Notes:

1. KDR Lug Kits sold separately. Contact TCI.
2. UL file number: cULus Listed File E116124.
3. KDR Line Inductors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
4. KDR IOM Manual Part Number 30895
5. NEC Current For 208/240 Volts, Horsepower Based On 208 Volts.
6. Material(s) Shall be RoHS Compliant
7. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

DIMENSIONS IN INCHES (EXCEPT AS NOTED) TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/32 ANGULAR ± 1°		THE INFORMATION AND DESIGN CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIANT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIANT INC. AND ITS SUBSIDIARIES.		DSW		DATE: 3/23/18				W132N10611 Grant Drive Germantown, WI 53022 © 2026 Alliant Inc.	
F	7473	Change Cut Length 2.75 to 3.00	4/30/26	DSW	KDRL3L Inductor Drawing		SCALE: 1:2.5		DIN. NO. 107537-7DG		SIZE C
E	6936	Match Revs. Remove L43L	1/27/25	DSW	NO ECO		REVISION		DATE		BY
B	5510	Flag Terminal updated	2/10/21	DSW	NO ECO		REVISION		DATE		BY