


NOTE:
 REFER TO GENERAL SCHEMATIC: M/M 31736, S/S 31736-1
 REFER TO CUSTOMER CONNECTION DIAGRAM: 28496-1
 INTERFACE DISPLAY MODULE DRAWING: 28282-1 & 28283-1
 CURRENT TRANSFORMER DRAWING: 26461

WEIGHT: estimated 2382 Lbs [1081 Kg]
 TOTAL HEAT LOSS:
 600A : 18,100 W [61,760 BTU/Hr]
 700A : 22,000 W [75,067 BTU/Hr]


FINISH: ANSI-61 GRAY POWDER COAT INSIDE AND OUT. SUB PANEL IS POWDER COATED WHITE.

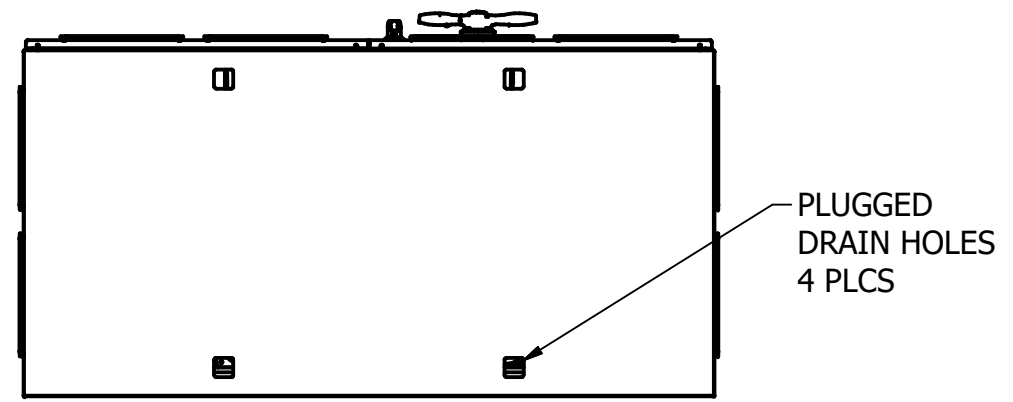

The 600A unit is rated for 450A when applied with a 480V/600V autotransformer.

The 700A unit is rated for 520A when applied with a 480V/600V autotransformer.

HOLE TOLERANCE ± .005

				TOLERANCES (EXCEPT AS NOTED)	 W132 N10611 Grant Drive Germantown, WI 53022
				DECIMAL	
				.XX ± .03	Outline, Installation, Active Filter 600A / 700A Type 12
				.XXX ± .010	
A	#5376 heat loss update	8/28/20	MJS	FRACTIONAL ± 1/32	DRN. BY: MJS
0	New Product	4/5/19	MJS	ANGULAR ± 1°	DATE: 4/5/19
NO	REVISION	DATE	BY		SCALE: yes
					APRVD: 107585
					SIZE: B
					SHT. 1 OF 1