480 Rated Voltage, 600 Max Voltage, Low Z, Impedance.

Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Losses (W)	Available Lug Kit	Terminal Hole Size (Inches)
KDRG3LE01	200	240	240	83.9	131	280	SLK12	0.44

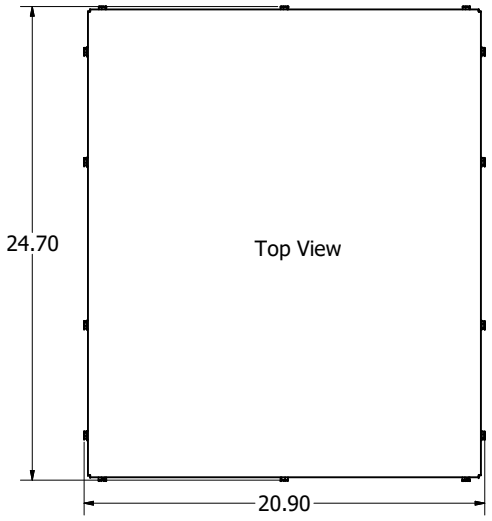

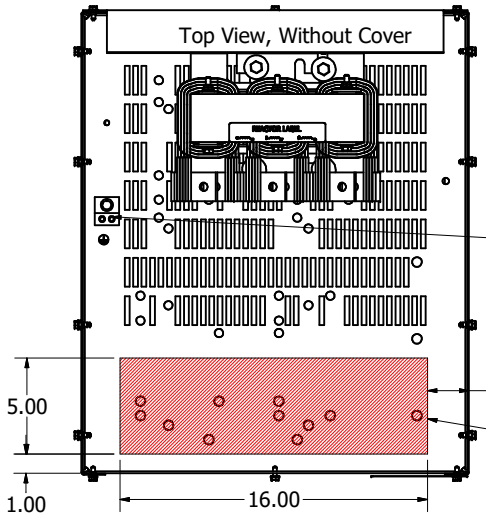

Ground Lug.
See IOM Manual, Part# 30895
Table S2/0, Wire Size And Torque.

Suggested
Customer Wire Entrance
Bottom Of Enclosure.
See Note: 6
(Non Removeable Panel)

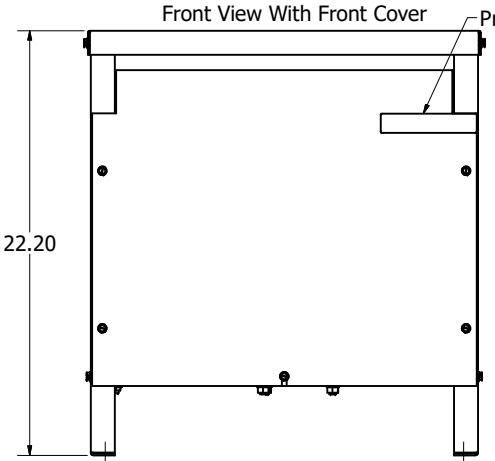

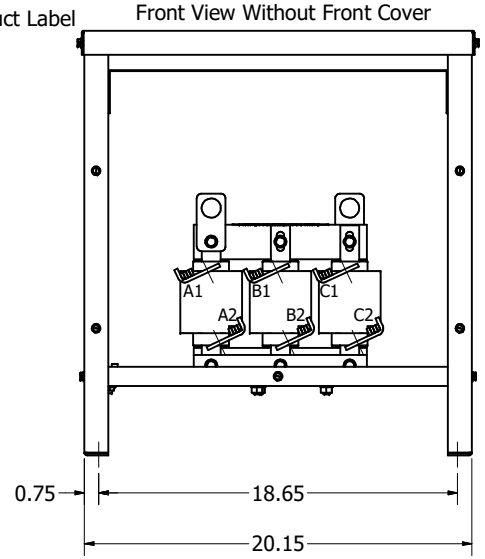

(Customer Connections)
Markings On Reactor
For Reference Only.

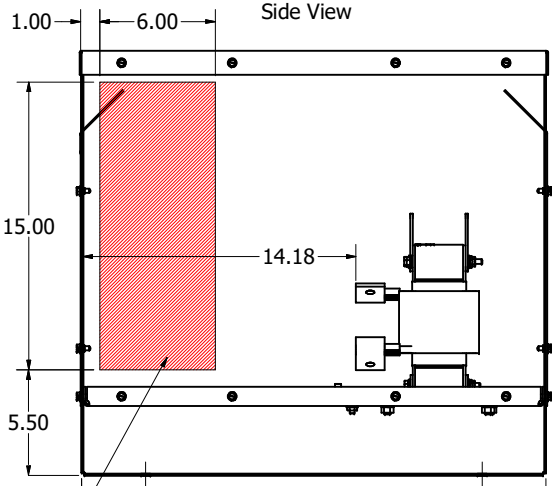

Suggested
Customer Entrance
Either Side Of Enclosure.
See Note: 6
(Non Removeable Panel)

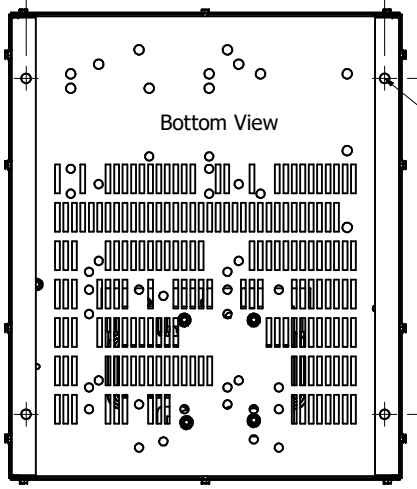

0.50 Dia Mounting Holes
4 Places.



Notes:

1. KDR Lug Kits sold separately. Contact TCI.
2. UL file number: cULus Listed File E116124.
3. KDR Drive Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
4. KDR IOM Manual Part Number 30895
5. Material(s) Shall be RoHS Compliant
6. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.
7. Dimensions are in inches unless otherwise specified.

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .25
.XXX ± .10
FRACTIONAL ± 1/32
ANGULAR ± 1°

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALIENT INC. AND ITS SUBSIDIARIES.

NO	ECO	REVISION	DATE	BY
A	6903	107610-3 to 107610-12	12/19/2024	DSW

DRN. BY: DSW
DATE: 12/19/24

Allient Power
W132N10611 Grant Drive
Germantown, WI 53022
© 2024 Allient Inc.

KDRG3LE01, 200HP
KDR, 480V, 240A, Type 1

SCALE: 1/4
DRN. NO. 107610-12DG
SIZE C
SHT.1 OF 1