


575 Rated Voltage, 600 Max Voltage, High Z, Impedance.

Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)	Losses (W)	Attached Lug Kit
KDRULS47HE3R	450	412	440	112	330	521	LK13
KDRULS46HE3R	500	472	500	95.4	330	661	LK14
KDRULS49HE3R	600	576	576	66.4	360	1194	LK14

Suggested Customer Wire Entrance Bottom Of Enclosure.
 See Note: 5
 (Non Removeable Panel)

SLK13: Two 350kcmil-2AWG, IHI, 375 Lb-in
 SLK14: Two 600kcmil-4AWG, IHI / Ilsco, Torque: 500 Lb-in

Suggested Customer Entrance Either Side Of Enclosure.
 See Note: 5
 (Non Removeable Panel)

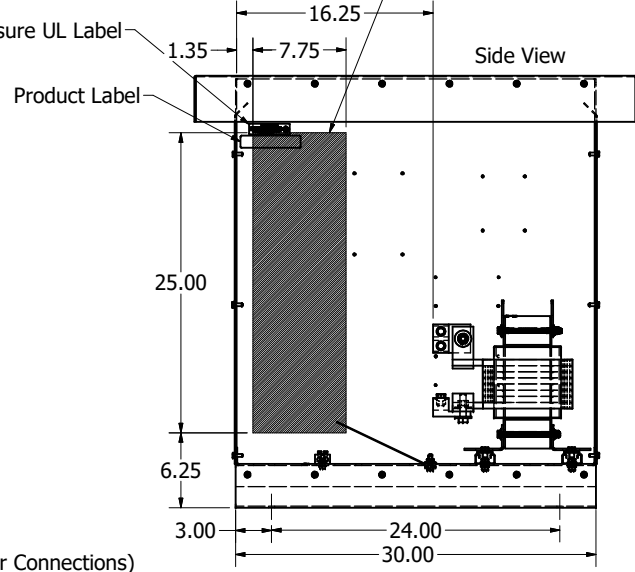

- Note:
1. UL file number: cULus Listed File E116124.
 2. KDR Drive Inductors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
 3. For Terminal Torques And Wire Size See, KDR IOM Manual, Part Number 30895
 4. Material(s) Shall be RoHS Compliant
 5. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

DIMENSIONS IN INCHES (EXCEPT AS NOTED) TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/32 ANGULAR ± 1°		THE INFORMATION AND DESIGN CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.		DESIGNED BY DSW	DATE 04/26/18		W132N10611 Grant Drive Germantown, WI 53022 © 2026 Allient Inc.
B	7551	Update Title Block	06/17/26	DSW	KDRUL S Frame Type 3R		
A		As Designed	04/26/18	DSW	SCALE 1/5	DEN. NO. 107623-2DG	SIZE C
NO	ECO	REVISION	DATE	BY	1/5	DEN. NO. 107623-2DG	SIZE C