
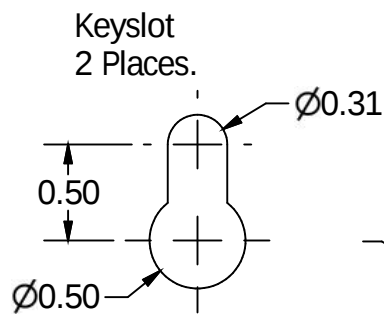
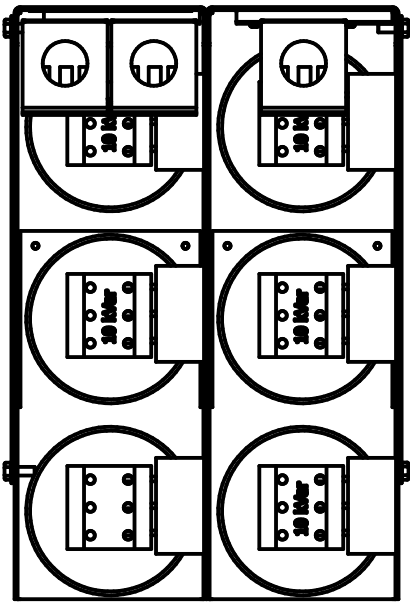





KPCUL058A64, 480V, 58kVar
Approx. Weight: 34 Lbs

Customer Input	
Wire Range	Tightening Torque
3/0-350mcm.	230 Lb-In


Cap Connection	
Wire Range	Tightening Torque
(2x)14-2 Awg.	31 Lb-In
(5x)14-6 Awg.	17.5 Lb-In
(4x)14-8 Awg.	17.5 Lb-In

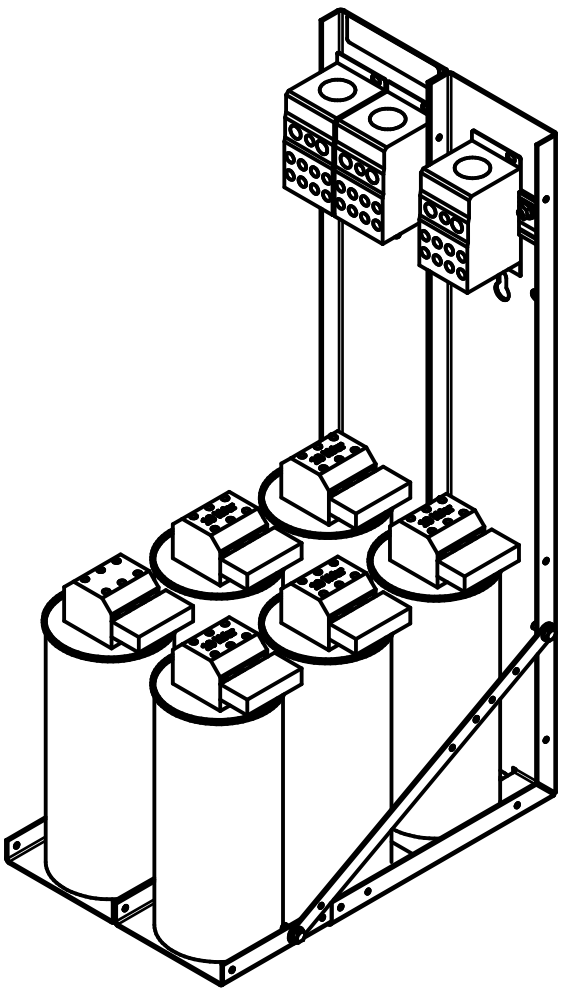

0.28 X 0.563 Slots
6 Places.

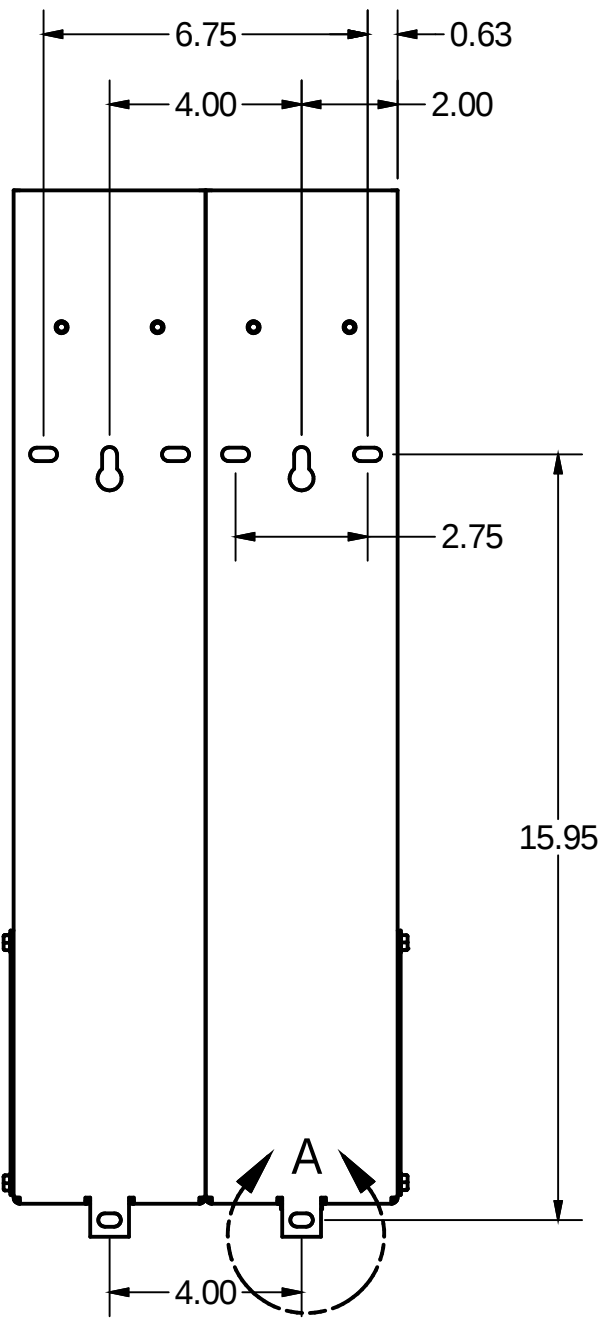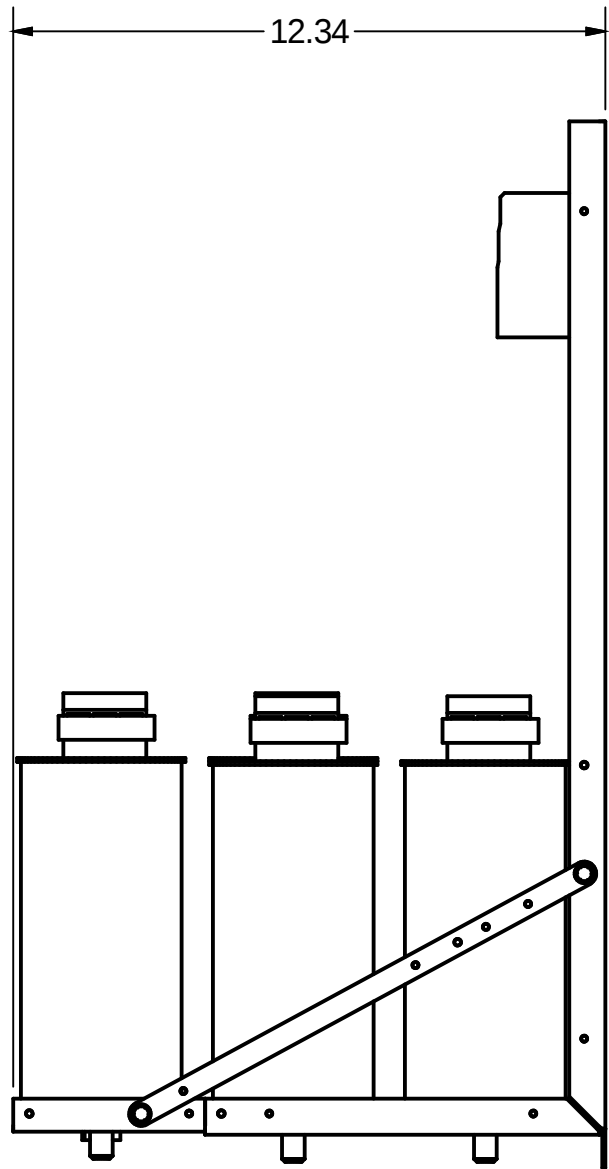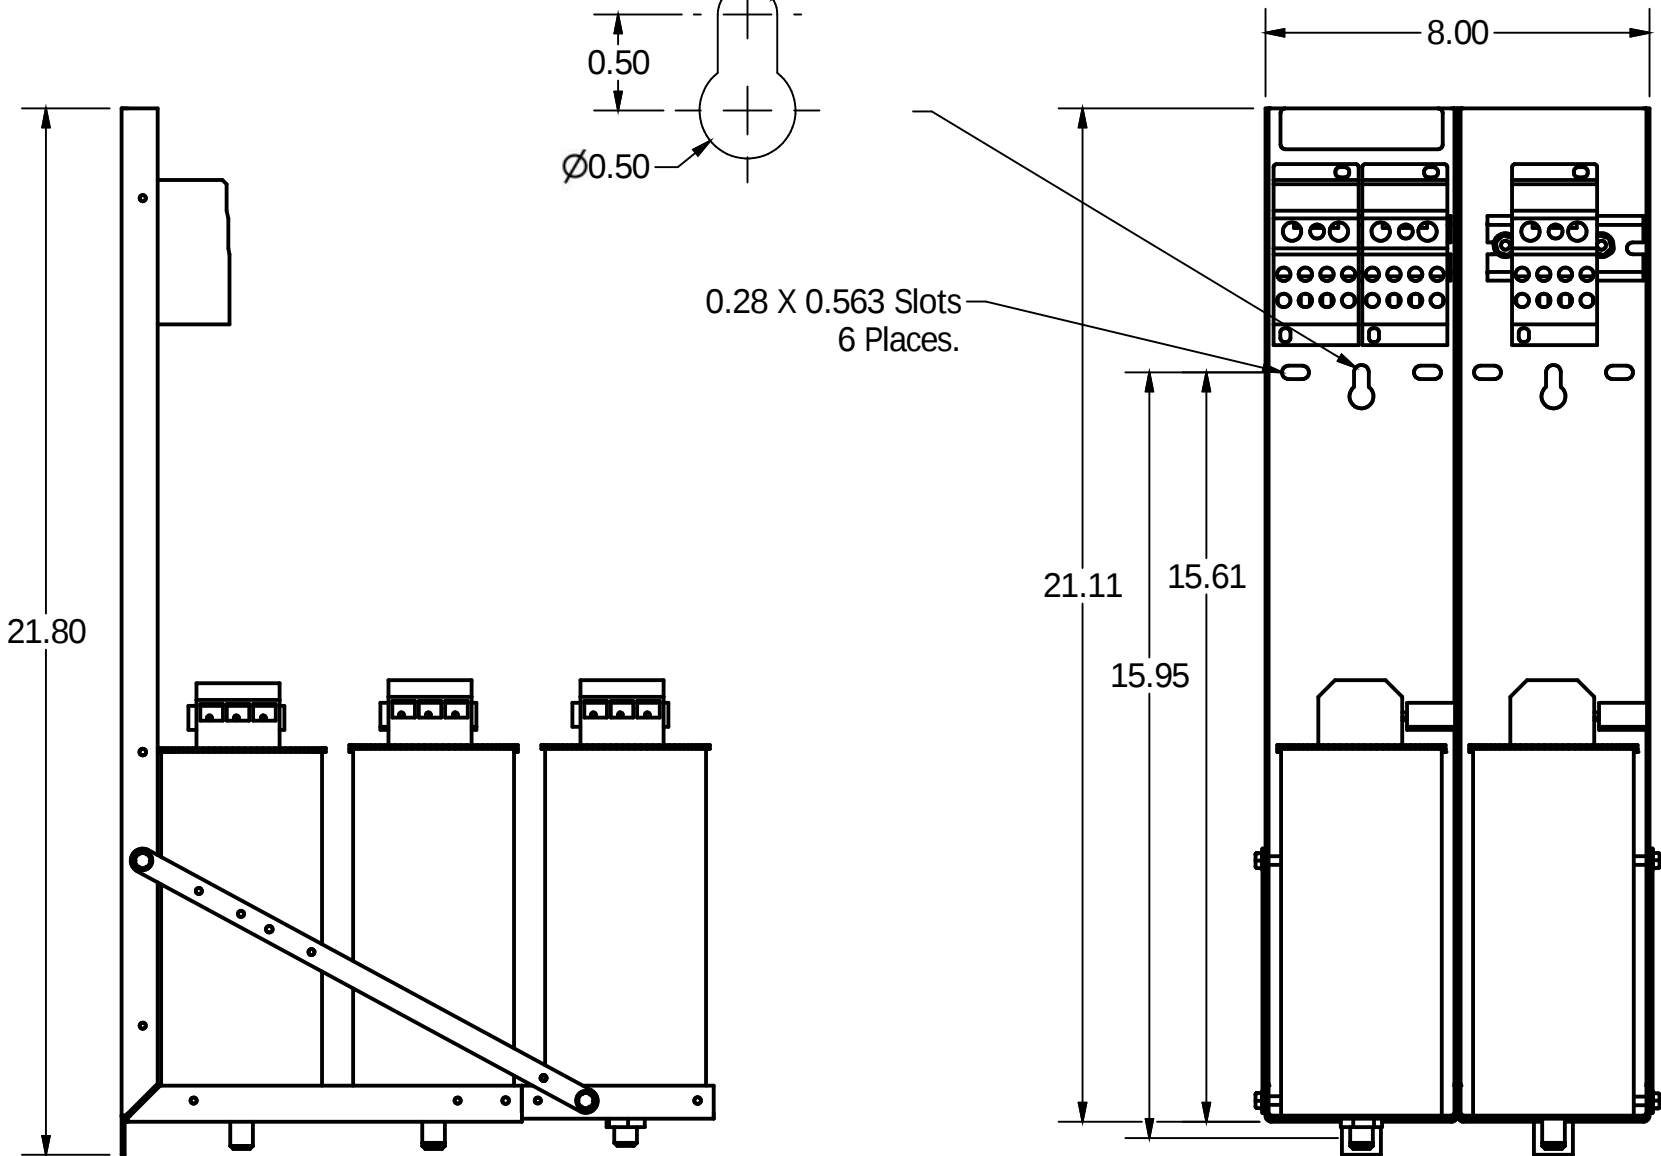

Note: 27908, Manual KPC Installation Guide
MUST SHIP WITH EACH ASSEMBLY.

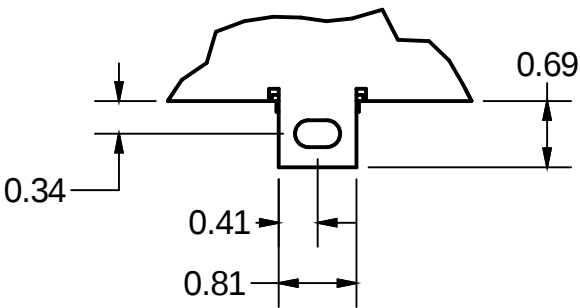

DETAIL A

HOLE TOLERANCE $\pm .005$

				TOLERANCES (EXCEPT AS NOTED)	 W132 N10611 Grant Drive Germantown, WI 53022		
				DECIMAL			
				.XX $\pm .03$	KPCUL058A64, 58kVar Panelized Caps		
				.XXX $\pm .010$			
				FRACTIONAL	DRN. BY: JRN SCALE: DATE: 03/28/18 APRVD: 107638DG		
				$\pm 1/32$			
A	As Designed	03/28/18	JRN	ANGULAR $\pm 1^\circ$	SIZE C		
NO	REVISION	DATE	BY		SHT.1 OF 1		