

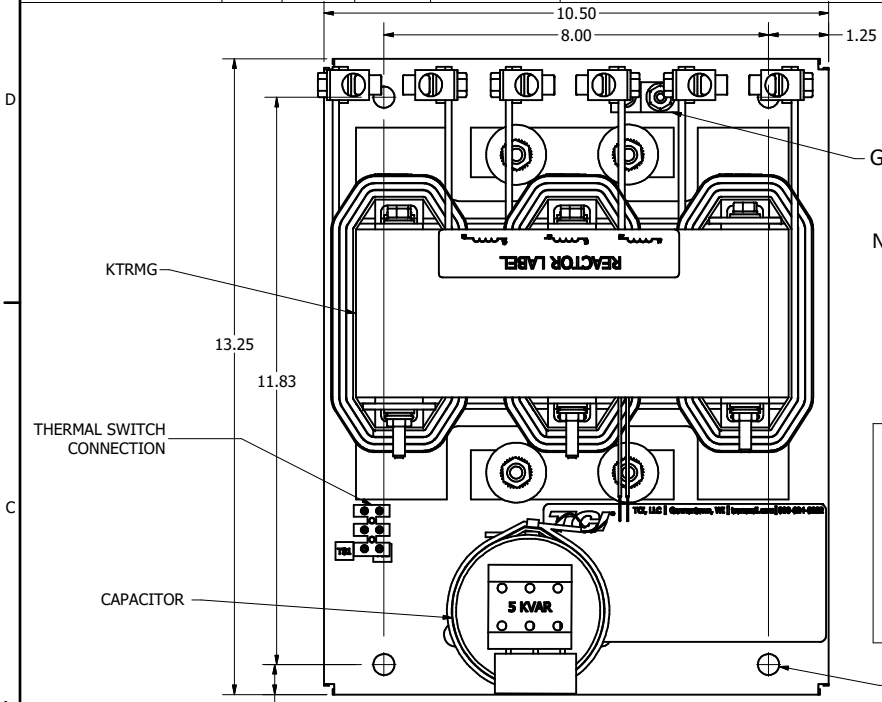
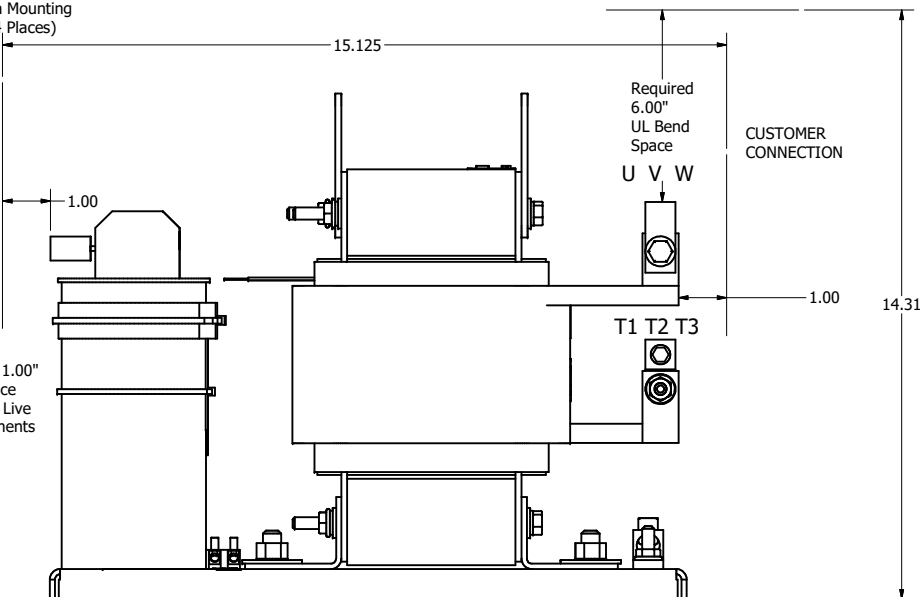
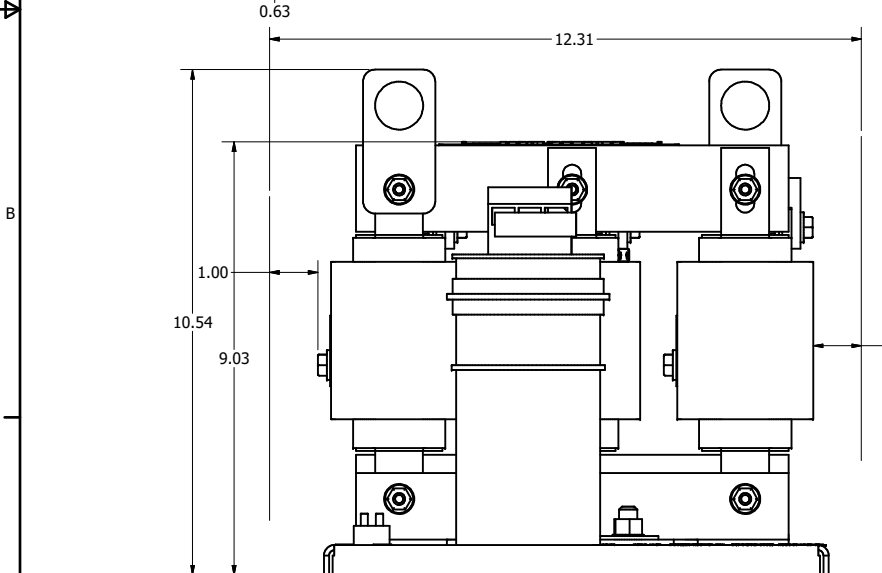


HGP PART NUMBER	HP	VOLT	CURRENT	WEIGHT	PRESSURE TERMINAL WIRE RANGE
MSD0065A000	50	480V	65 AMPS	100LBS	2/0 - 14 AWG

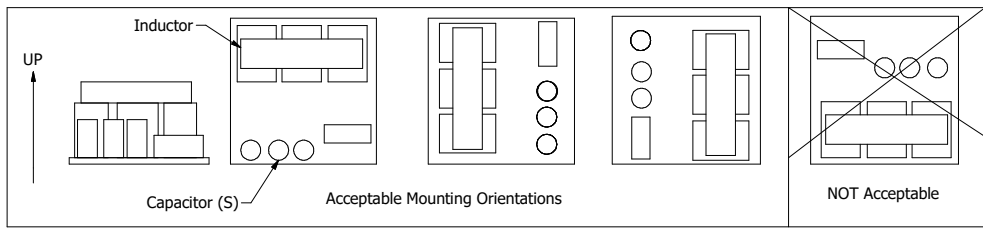

GROUND LUG

NOTE: FOR WIRE RANGE AND TORQUE INFORMATION SEE IOM MANUAL.

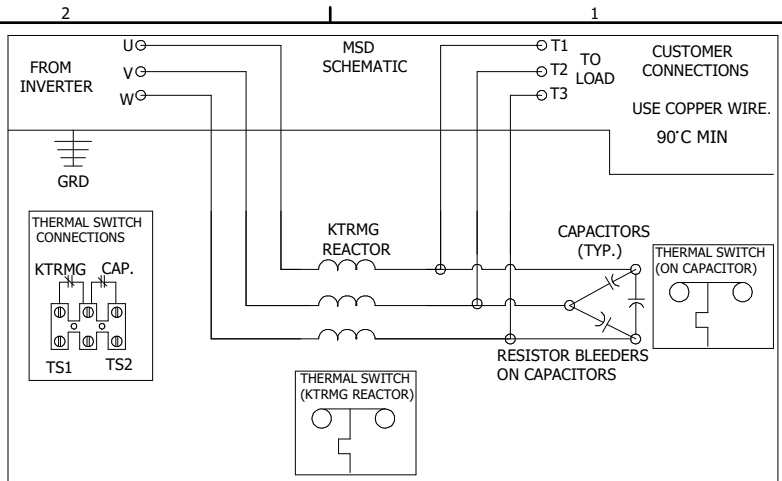

**WARNING**

WAIT TWO MINUTES AFTER POWER IS TURNED OFF BEFORE OPENING TO ALLOW FOR CAPACITOR DISCHARGE.

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS  
CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

CAPACITOR DISCHARGE LABEL TO SHIP WITH PANEL

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY	ANGULAR
				± 1°

TOLERANCES (EXCEPT AS NOTED)			W132N10611 (Rev. 13 Feb 2024) Germantown, WI 53022 © 2024 TCL, LLC
.XX ± .25	.XXX ± .10		
C 6577, Termination Change on Inductor B Added Clearance and Orientation Info A As Designed		MotorShield Sinewave Filter 65 Amps, 480/3/60, Open	107749DG
DATE	DATE	DATE	DATE
2/20/2024	10/10/2018	6/15/2018	6/15/2018
DSW	JRN	JRN	JRN
SCALE: 1/2	SCALE: 1/2	SCALE: 1/2	SCALE: 1/2
SHT 1 OF 1			