
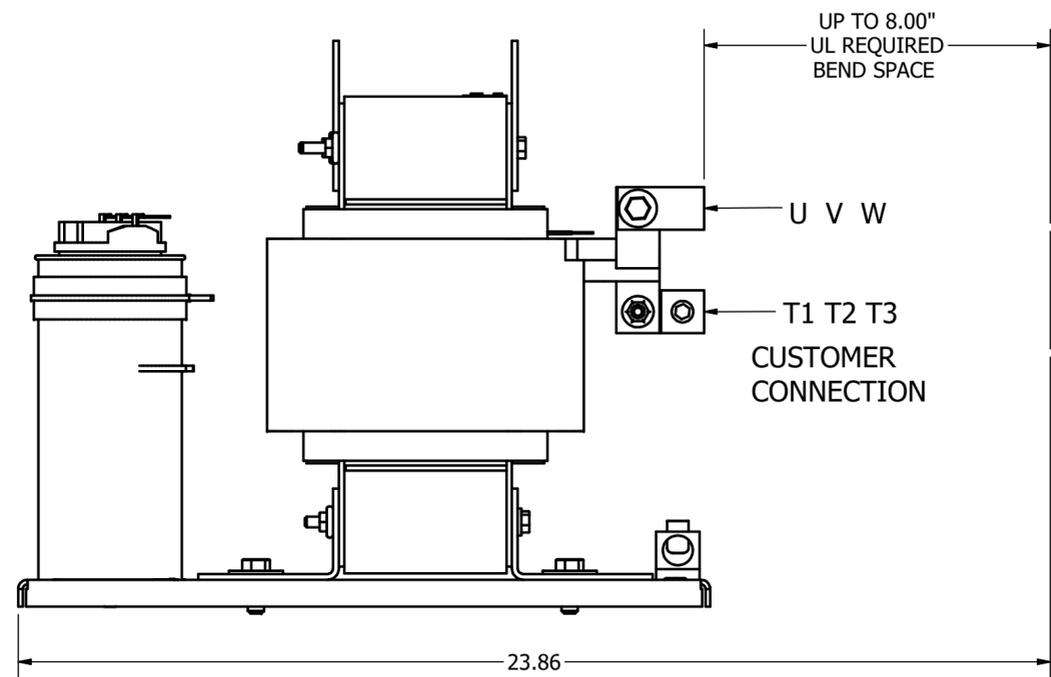
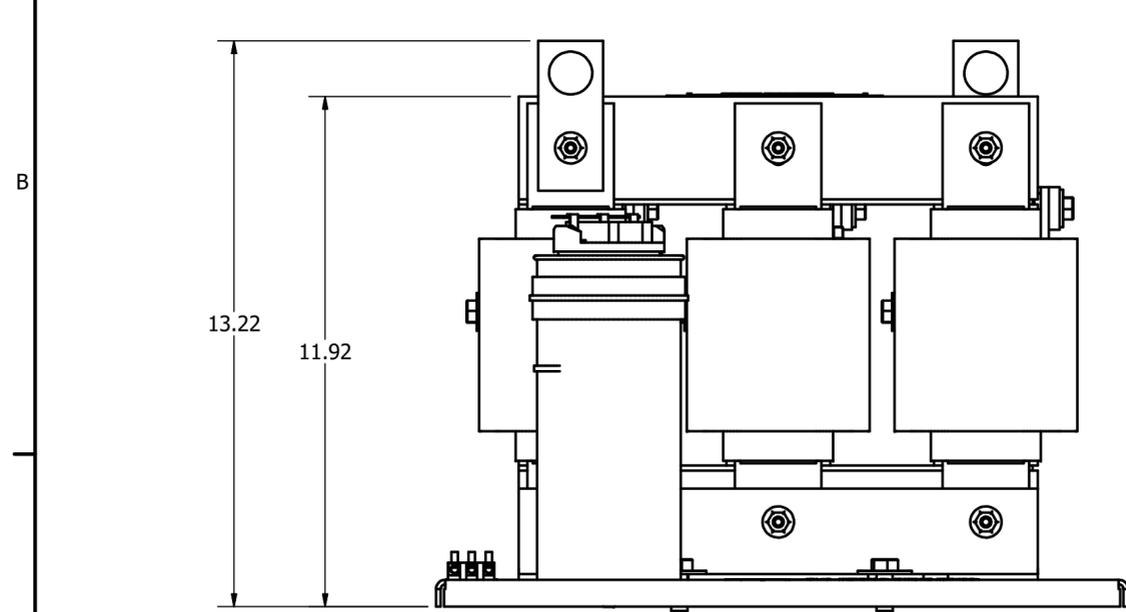
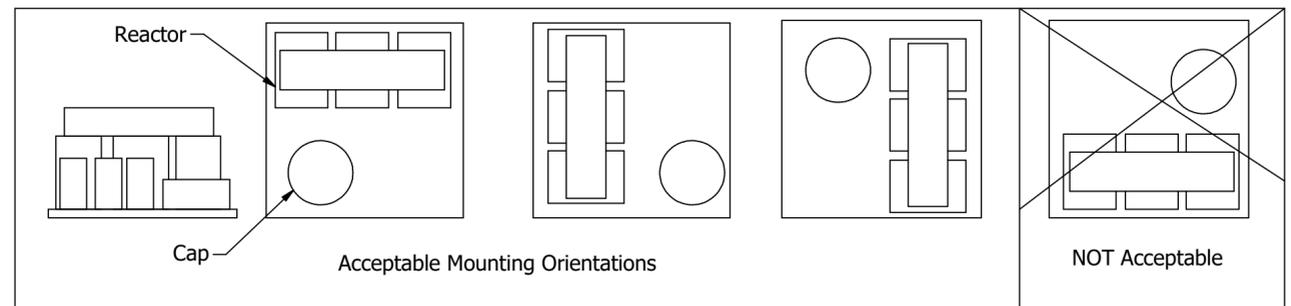
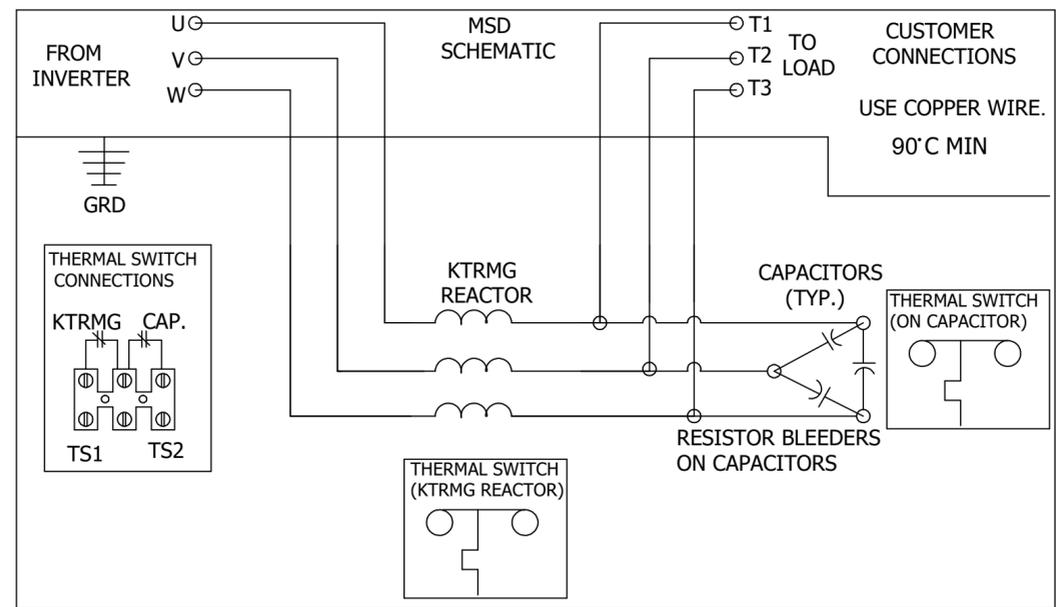


HGP PART NUMBER	HP	VOLT	CURRENT	WEIGHT	PRESSURE TERMINAL WIRE RANGE
MSD0160A000	125	480V	160 AMPS	220LBS	250MCM - 1 AWG

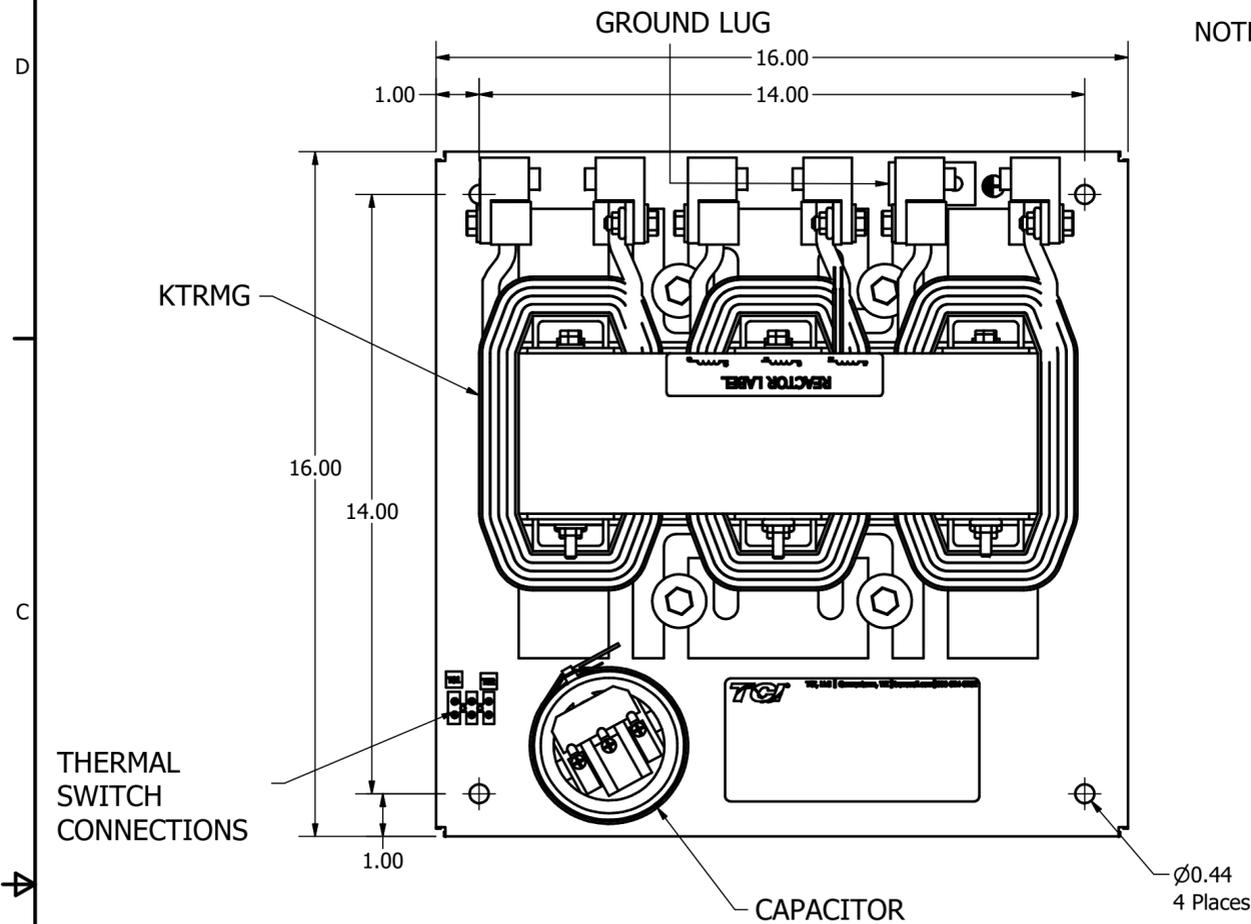

WARNING
WAIT TWO MINUTES AFTER POWER IS TURNED OFF BEFORE OPENING TO ALLOW FOR CAPACITOR DISCHARGE.

CAPACITOR DISCHARGE LABEL TO SHIP WITH PANEL

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS
CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

			TOLERANCES (EXCEPT AS NOTED)	TGI W132 N10611 Grant Drive Germantown, WI 53022
			DECIMAL	
			.XX ± .03	MotorShield Sinewave Filter 160 Amp, 480/3/60, Open
			.XXX ± .010	
			FRACTIONAL	DRN BY JRN DATE 10/04/18 107899DG
			± 1/32	
A	As Designed	10/04/18	JRN	SCALE: 1/3
NO	REVISION	DATE	BY	SIZE C
			ANGULAR ± 1°	SHT. 1 OF 1