

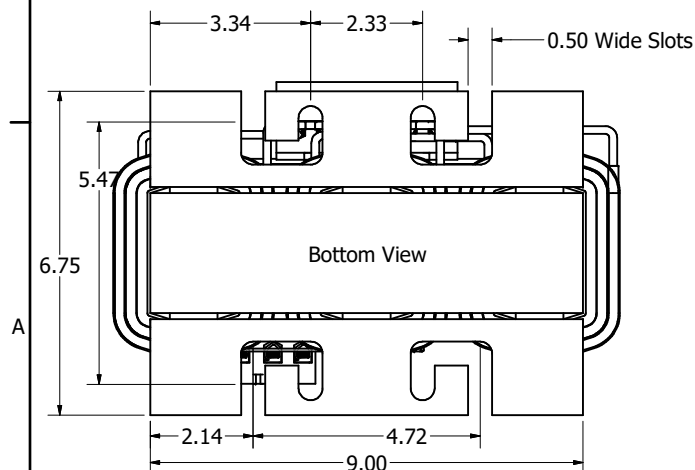
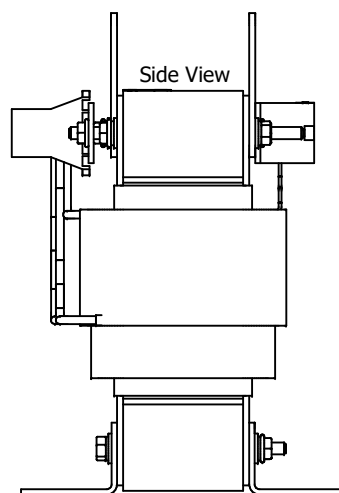


(Customer Connections)  
Markings On Terminal Block/Coil  
For Reference Only.

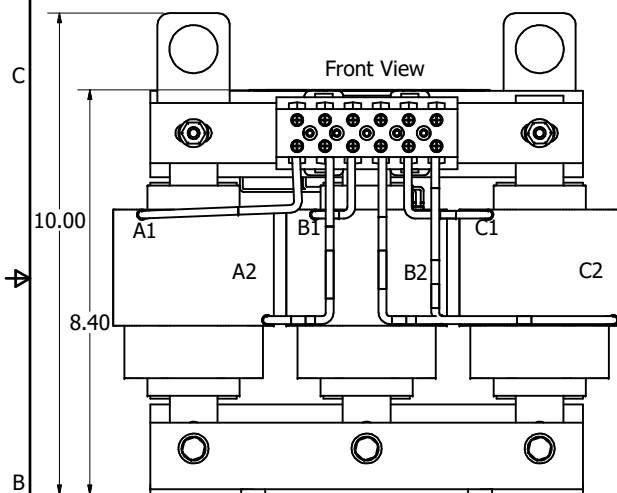


TCI Part Number	Amps (A)	Rated Voltage (V)	Hz	---uH ±5%	Approx Weight (LBS)
KTRMG35C	35	600	60	1710	60

Wire Range: 1- 4 AWG. Torque : 35 LBS-IN (3.95 Nm)  
6- 14 AWG. Torque : 30 LBS-IN (3.39 Nm)  
16- 20 AWG. Torque : 25 LBS-IN (2.28 Nm)  
22 AWG. Torque : 20 LBS-IN (2.26 Nm)

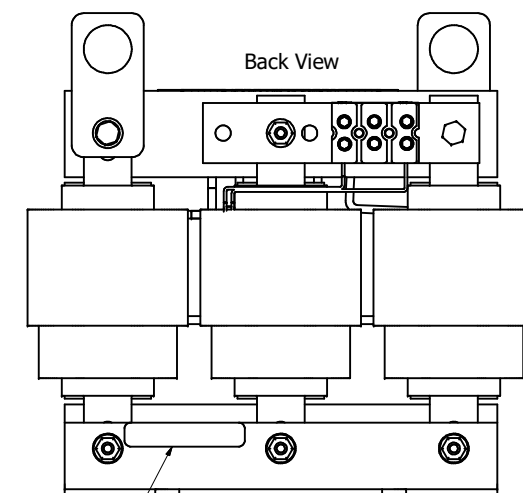

Cell Label



Wire Range: 18 AWG To 4 AWG.  
Torque: 20 LB-IN (2.3 Nm)

Switch Opens on Temperature Rise  
Contact Rating: 6A @ 120 VAC

Customer Is Responsible For Installation  
To Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

DIMENSIONS IN INCHES (EXCEPT AS NOTED) TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/32 ANGULAR ± 1°		THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.		DESIGNED BY JRN DATE 07/25/19		DRAWN BY DSW DATE 4/2/25		SCALE 1/2		PART NO. 108079-1DG		SHEET 1 OF 1	
1	6997	Design improvement											
NO	ECO	REVISION											

W132N10611 Grant Drive  
Germantown, WI 53022  
© 2025 Allient Inc.

**Allient Power**

TRMG35C  
600V, 35A, Sinewave Inductor