TCI Part Number	Amps (A)	Rated Voltage (V)	Hz	---uH ±5%	Approx Weight (LBS)
KTRMG45A	45	480	60	1060	50

Wire Range: 1- 4 AWG. Torque : 35 LBS-IN (3.95 Nm)
6- 14 AWG. Torque : 30 LBS-IN (3.39 Nm)
16- 20 AWG. Torque : 25 LBS-IN (2.28 Nm)
22 AWG. Torque : 20 LBS-IN (2.26 Nm)

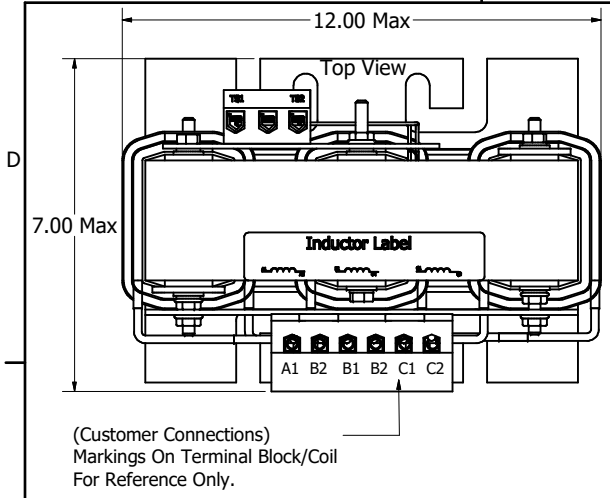

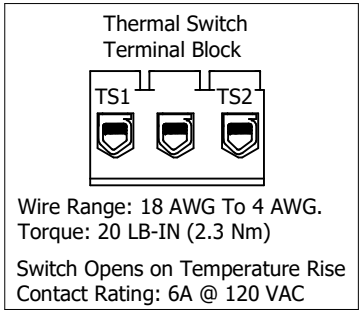

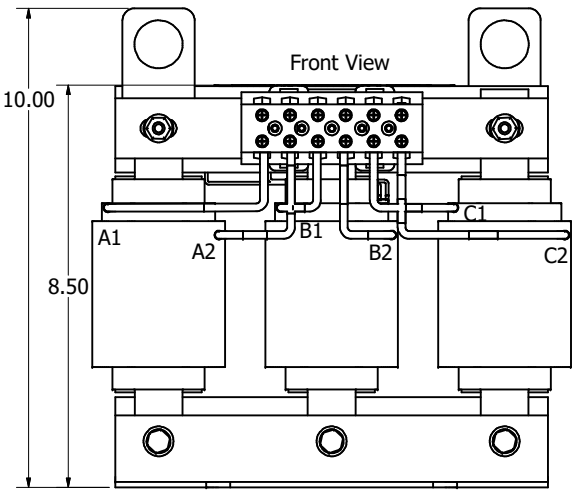

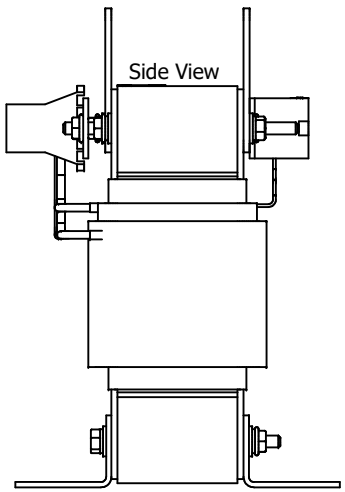

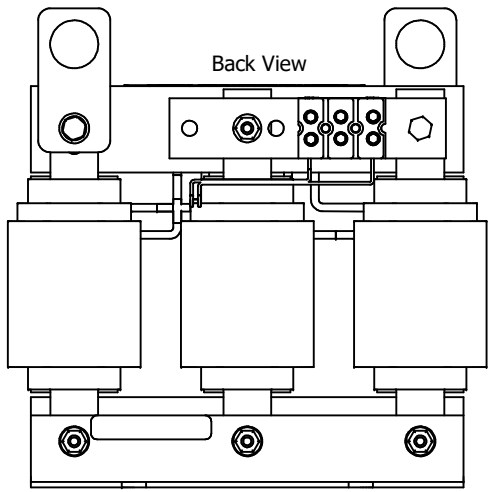

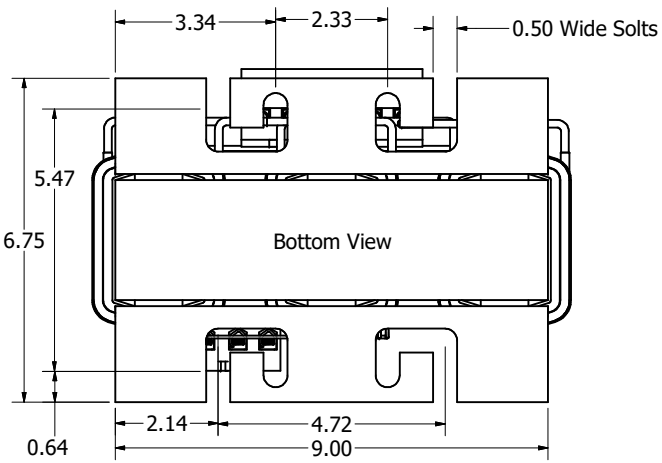

Customer Is Responsible For Installation
To Meet All NationalAnd Local Electrical Codes.

Material(s) Shall be RoHS Compliant
Dimensions are in inches unless otherwise specified.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
H	6997, Remove KTRMG35C	4/03/25	DSW
G	6839, Match Revs	11/21/2024	DSW
B	5657, Add Lift Rings	7/12/2021	DSW
A	Combined Drawings, Added T/S	07/25/19	JRN

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .25
.XXX ± .10
FRACTIONAL
± 1/16
ANGULAR
± 1°

W132N10611 Grant Drive
Germantown, WI 53022
© 2025 TCI, LLC

KTRMG G Frame, Terminal Block
Inductor Drawing

DRN. BY: JRN | DATE: 07/25/19 | 108079DG
SCALE: 1/2 | APRVD: | SIZE: C | SHT 1 OF 1