




NOTE: MARKINGS A1,A2,B1,B2,C1,C2 ON COILS, ARE FOR REFERENCE ONLY.

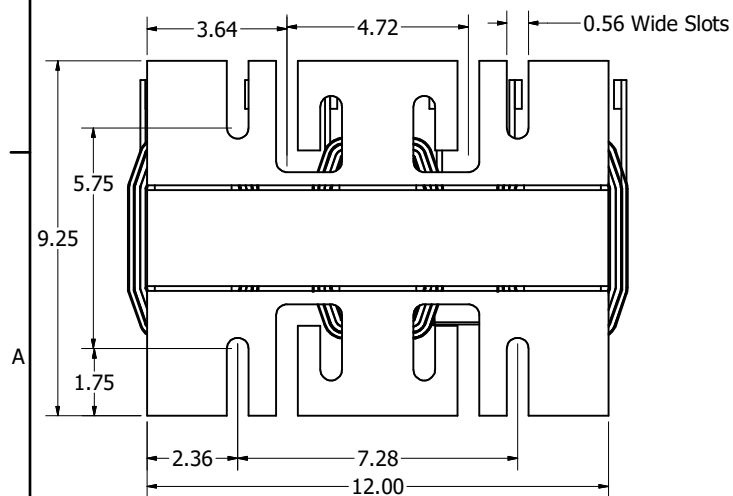

0.28 Dia Holes
6 Places

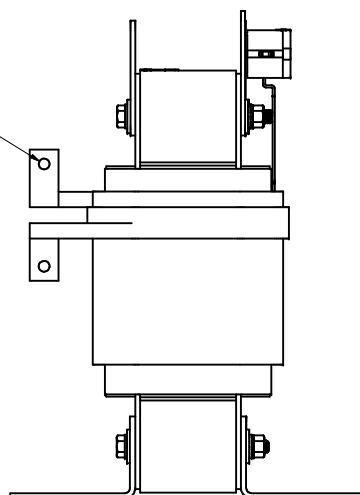


Thermal Switch
Terminal Block



Wire Range: 18 AWG To 4 AWG.
Torque: 20 LB-IN (2.3 Nm)


Switch Opens on Temperature Rise
Contact Rating: 6A @ 120 VAC

TCI Part Number	Rated Amps (A)	Rated Voltage (V)	Hz	---uH ±5%	Approx Weight (LBS)	Terminal Hole Size (Inches)	Available Lug Kit
KTRMG80A	80	480	60	598	86	0.28	SLK10

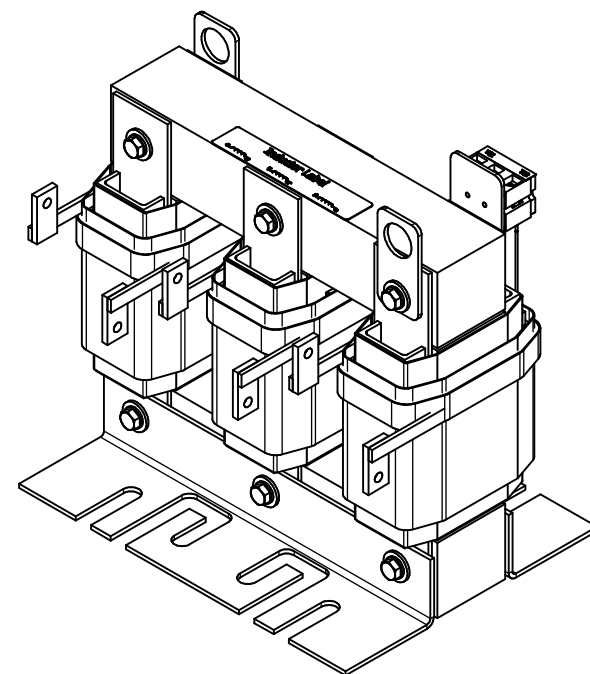

Customer Is Responsible For Installation
To Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

DIMENSIONS IN INCHES (EXCEPT AS NOTED) TOLERANCES (EXCEPT AS NOTED) DECIMAL XX ± .25 XXX ± .10 FRACTIONAL ± 1/32 ANGULAR ± 1°	THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLENT INC. AND ITS SUBSIDIARIES.			DESIGNED BY DSW DATE 5/3/23		 W132N10611 Grant Drive Germantown, WI 53022 © 2025 Allient Inc.		
	G	7005	Match Revs/15465 to 32766	4/23/25	DSW		KTRMG80A 480V, 80Amp, Sinewave Inductor	
	A	6295	Inductor Updated	5/3/23	DSW			
	NO	ECO	REVISION	DATE	BY			
				SCALE	1:2.5			DRAWING NO.