TCI Part Number	Rated Amps (A)	Rated Voltage (V)	Hz	---uH ±5%	Approx Weight (LBS)	Available Lug Kit
KTRMG160A	160	480	60	299	160	SLK11
KTRMG200A	200	480	60	239	168	SLK11

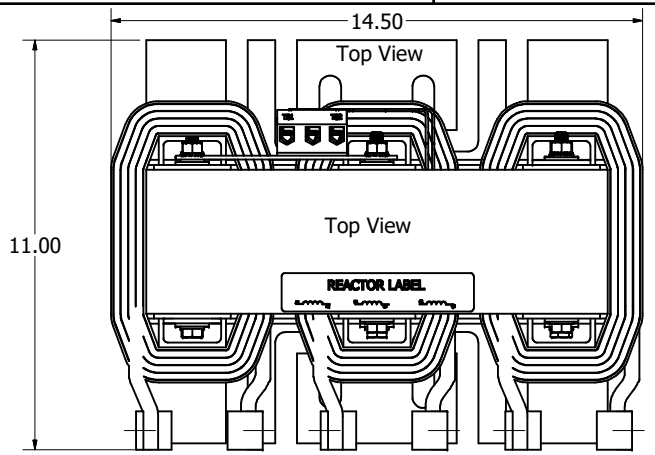



Wire Range: 18 AWG To 4 AWG.
Torque: 20 LB-IN (2.3 Nm)

Switch Opens on Temperature Rise
Contact Rating: 6A @ 120 VAC

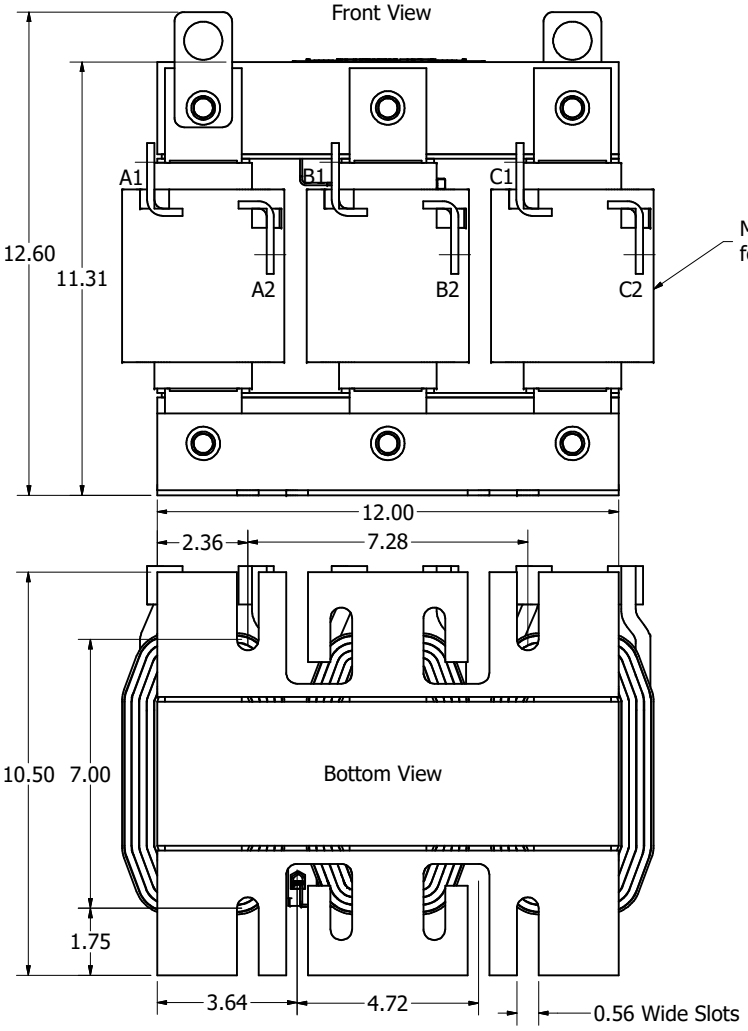

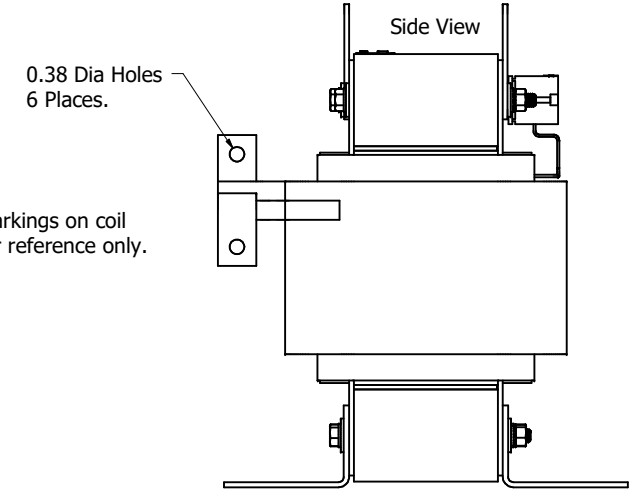

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
D	6768, TS Instruction added	9/10/2024	DSW
C	6760, Add Available lug kit	8/23/2024	DSW
B	4682 Added KTRMG160AX2	08/01/19	JRN
A	As Designed	07/22/19	JRN

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .25
.XXX ± .10
FRACTIONAL
± 1/32
ANGULAR
± 1°

W132N10611 Grant Drive
Germantown, WI 53022

© 2024 TCI, LLC

KTRMG S Frame, Copper Bus
Reacter Drawing

DRN. BY: JRN | DATE: 07/22/19 | 108095DG
SCALE: 1/2.5 | APRVD: | SIZE: C
SHT 1 OF 1