

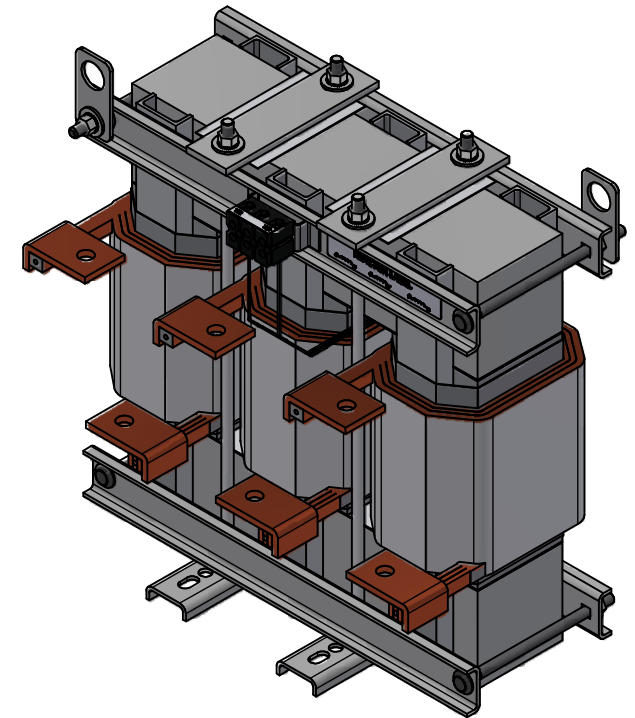


TCI Part Number	Rated Amps (A)	Rated Voltage (V)	Hz	---uH ±5%	Approx Weight (LBS)	Terminal Hole Size (In)	Available Lug Kit
KTRMG250A	250	480	60	191	275	0.44	SLK12
KTRMG305A	305	480	60	157	285	0.44	SLK12
KTRMG362A	362	480	60	132	295	0.56	SLK13
KTRMG250C	250	600	60	239	275	0.44	SLK12
KTRMG305C	305	600	60	196	285	0.44	SLK12

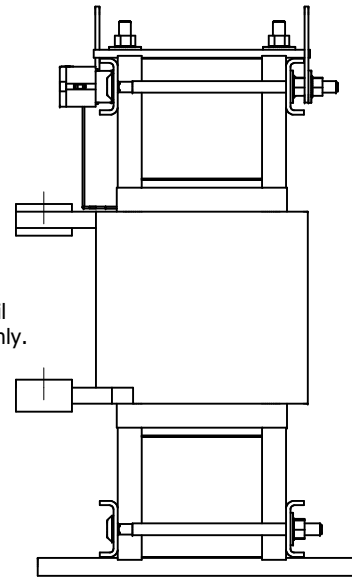

Thermal Switch  
Terminal Block



Wire Range: 18 AWG To 4 AWG.  
Torque: 20 LB-IN (2.3 Nm)

Switch Opens on Temperature Rise  
Contact Rating: 6A @ 120 VAC

Customer Is Responsible For Installation to  
Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED  
IN THIS DRAWING ARE CONFIDENTIAL AND THE  
PROPRIETARY PROPERTY OF ALLIED MOTION  
TECHNOLOGIES INC. AND ITS SUBSIDIARIES.  
NEITHER THIS DESIGN NOR ANY INFORMATION  
CONTAINED IN THIS DRAWING MAY BE  
REPRODUCED OR DISCLOSED TO OTHERS  
WITHOUT THE EXPRESS WRITTEN CONSENT OF  
ALLIED MOTION TECHNOLOGIES INC. AND ITS  
SUBSIDIARIES.

NO	REVISION	DATE	BY
D	6768 Adding Thermal	8/19/2024	DSW
D	Switch Instruction, To Shop Drawing		
C	6760 Add Available Lug Kit	8/12/2024	DSW
B	5525 KTRMG200C Removed	03/01/21	JRN
A	As Designed	05/10/19	JRN

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .25
.XXX ± .10
FRACTIONAL
1/32
ANGULAR
± 1°

<b>TCI</b>		W132N10611 (Rev 1346)	
An Allied Motion Company		© 2024 TCI, LLC	
KTRMG X Frame, Copper Bus			
Reactor Drawing			
DRN BY JRN	DATE 05/10/19	108096DG	
SCALE 1/2	DRN BY JRN	DATE 05/10/19	REV C
SHT 1 OF 1			