TCI Part Number	Rated Amps (A)	Rated Voltage (V)	Hz	---uH ±5%	Approx Weight (LBS)	Available Lug Kit	Terminal Hole Size (Inches)
KTRMG850A	850	480	60	57	540	SLK16	0.53

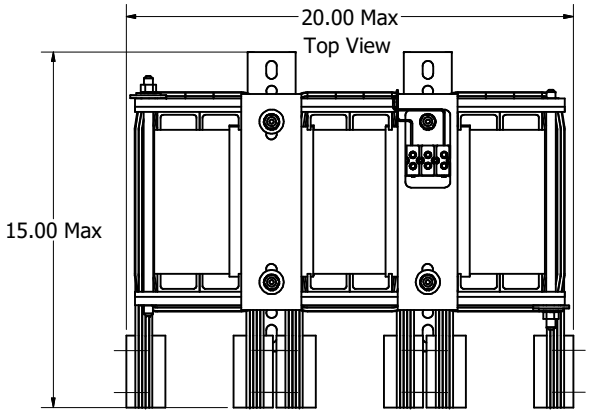

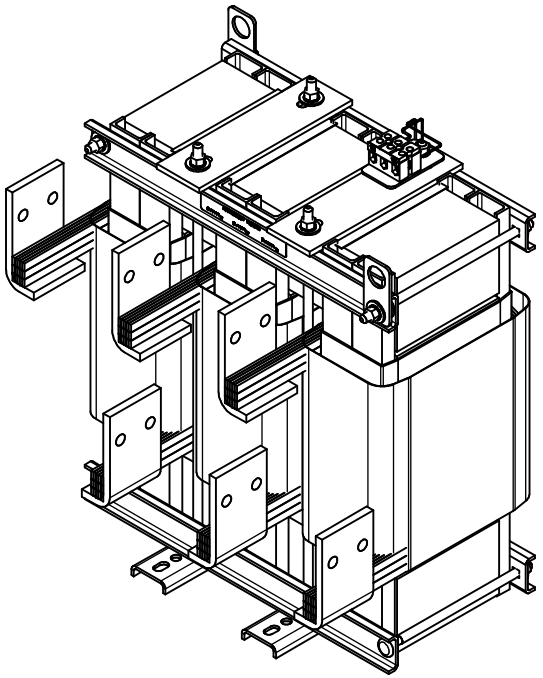

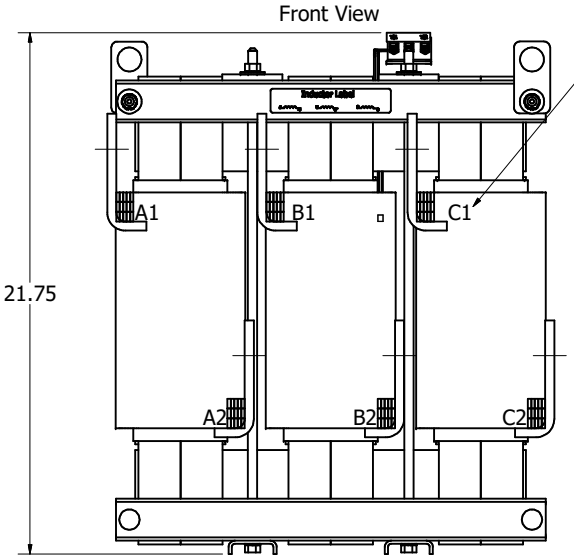

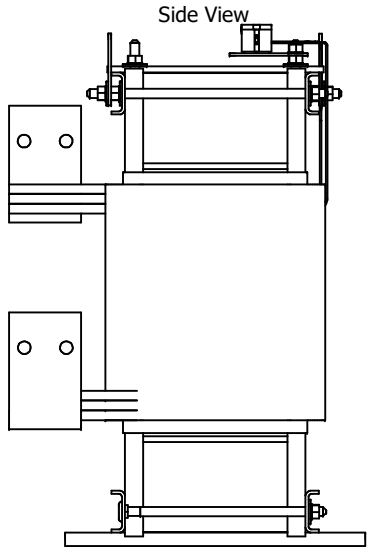

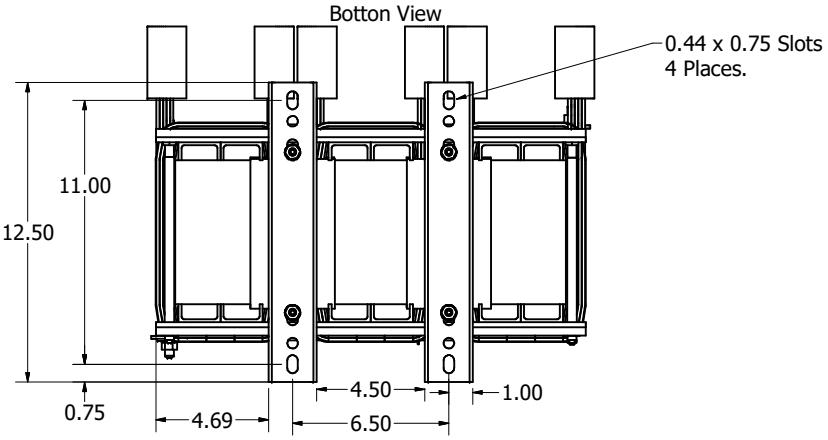

Thermal Switch Terminal Block



Wire Range: 18 AWG To 4 AWG.
Torque: 20 LB-IN (2.3 Nm)
Switch Opens on Temperature Rise
Contact Rating: 6A @ 120 VAC

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.
Material(s) Shall be RoHS Compliant

NO	ECO	REVISION	DATE	BY
G	7063	Add NX Tube To Back of Inductor	5/22/25	DSW
F	7042	Add Insulation to threaded rod	5/5/2025	DSW
E	6949	Coil Updated, Match Revs	2/11/25	DSW
A		As Designed	1/29/20	JRN

DIMENSIONS IN INCHES (EXCEPT AS NOTED)
TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .25
.XXX ± .10
FRACTIONAL
± 1/32
ANGULAR
± 1°

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.

DRN. BY: JRN
DATE: 01/29/20

W132N10611 Grant Drive
Germantown, WI 53022
© 2025 Allient Inc.

KTRMG850A
SINEWAVE Inductor

SCALE: 1/4
DRN. NO. 108097-6DG
SIZE C
SHT.1 OF 1