TCI Part Number	Rated Amps (A)	Rated Voltage (V)	Hz	---uH ±5%	Approx Weight (LBS)	Max Height (In)	Available Lug Kit
KTRMG420A	420	480	60	114	400	18.50	SLK13
KTRMG362C	362	600	60	165	465	22.00	SLK13
KTRMG420C	420	600	60	142	450	21.50	SLK13

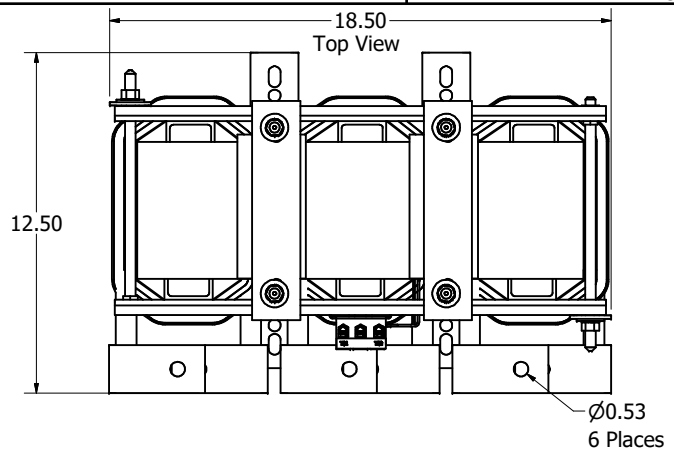

Thermal Switch
Terminal Block



Wire Range: 18 AWG To 4 AWG.
Torque: 20 LB-IN (2.3 Nm)
Switch Opens on Temperature Rise
Contact Rating: 6A @ 120 VAC

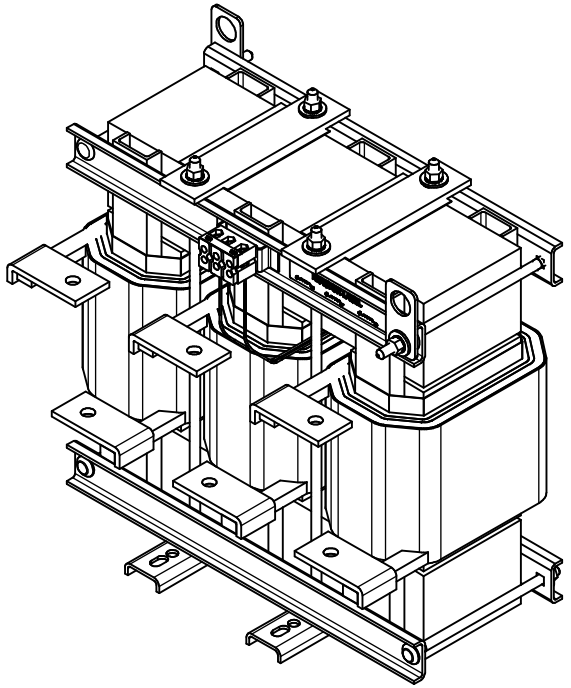

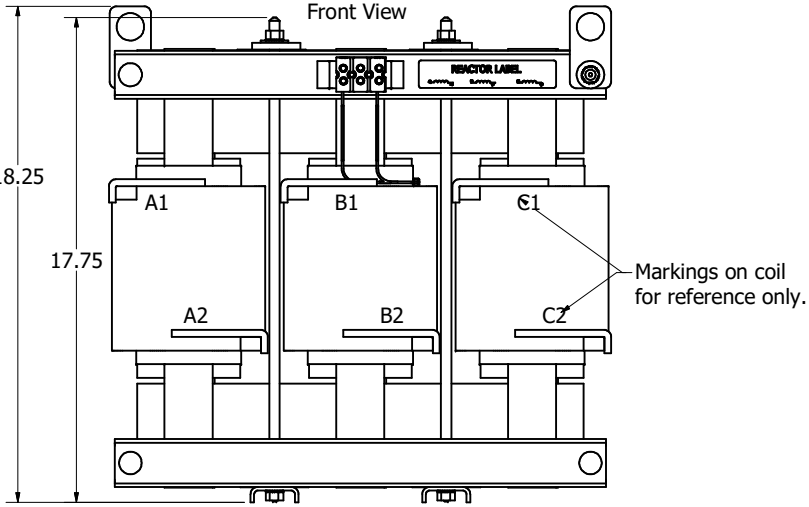

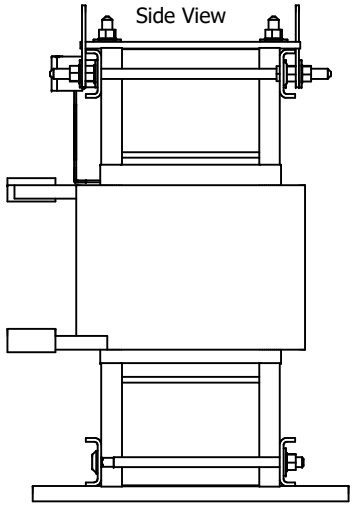

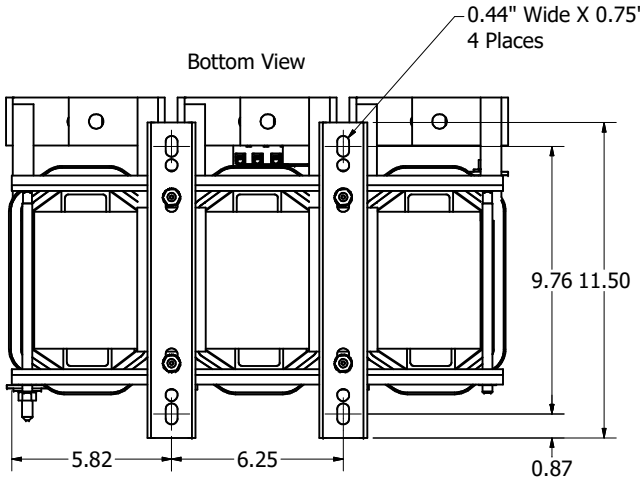

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
C	6768, Move TS Switch	9/10/2024	DSW
B	6760, Add Available Lug Kit	8/12/2024	DSW
A	As Designed	09/16/2019	DSW

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .25
.XXX ± .10
FRACTIONAL
± 1/32
ANGULAR
± 1°

W132N10611 Grant Street
Germantown, WI 53022
© 2024 TCI, LLC

KTRMG Y Frame, Copper Bus
Reactor Drawing

DRN. BY: JRN | DATE: 09/16/2019 | 108097-9DG
SCALE: 1:3.5 | APRVD: | SIZE: C | SHT 1 OF 1