


Wire Range	Tightening Torque
2/0 - 3 AWG	50 Lbs-In (5.6 N-m)
4 AWG - 6 AWG	45 Lbs-In (5.1 N-m)
8 AWG	40 Lbs-In (4.5 N-m)
10 AWG - 14 AWG	35 Lbs-In (4.0 N-m)

TCI Part Number	Rated Amps (A)	Rated Voltage (V)	Hz	---uH ±5%	Approx Weight (LBS)	Attached Lug Kit
KLRUL80APTMG	80	480	60	598	90	SLK10
KLRUL110APTMG	110	480	60	435	95	SLK10
KLRUL130APTMG	130	480	60	368	100	SLK10
KLRUL110CPTMG	110	600	60	543	105	SLK10


TCI (800) 824-8282 transcoll.com
 TCI, LLC Germantown, WI USA. transcoll.com 800-824-8282
 KLRUL Reactor Motor Amps — 3PH, 50/60Hz, ---V Rated, 600V Max, -A Max, RoHS 40C Amb Max Use 75C CU conductors only, Term Torque—lb-in
 UL US LISTED IEC 2ND CONTR. NO. 11110
 DATE CODE A1 B1 C1

- Notes:
1. UL file number: cULus Listed File E116124.
 2. KLR Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
 3. Material(s) Shall be RoHS Compliant
 4. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

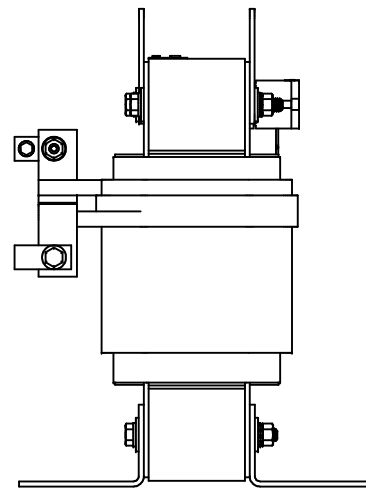

Thermal Switch Terminal Block

Wire Range: 18 AWG To 4 AWG.
 Torque: 20 LB-IN (2.3 Nm)
 Switch Opens on Temperature Rise
 Contact Rating: 6A @ 120 VAC

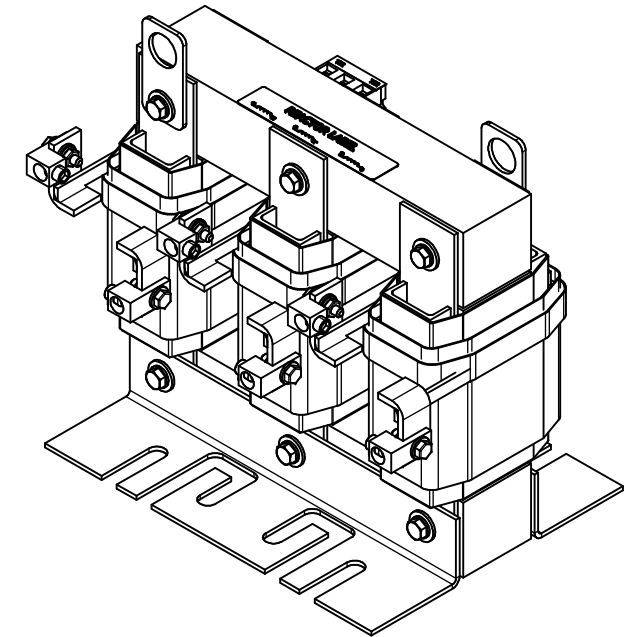

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10		W182N10611 (Rev 1) Feb 2023 Germantown, WI 53012 © 2023 TCI, LLC An Allied Motion Company KLRUL----APTMG	
B	6375, update drawing	8/8/2023	DSW	FRACTIONAL ± 1/32	DRN BY: DSW	DATE: 5/3/2023	108474-1DG
A	6295, Inductor Updated	5/3/2023	DSW	ANGULAR ± 1°	SCALE: 1/2.5	DRWN: []	108474-1DG
NO	REVISION	DATE	BY	± 1°	SCALE: 1/2.5	DRWN: []	SHT 1 OF 1