

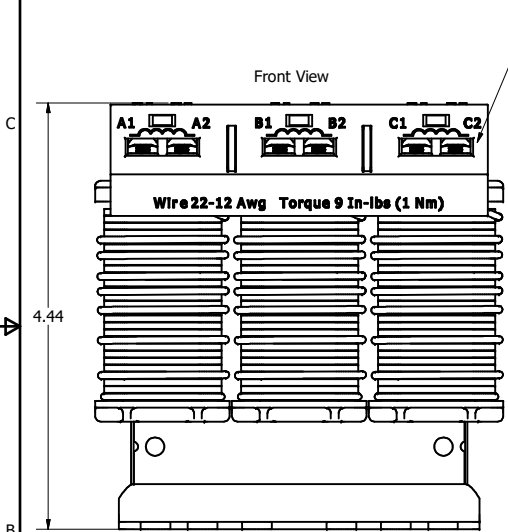
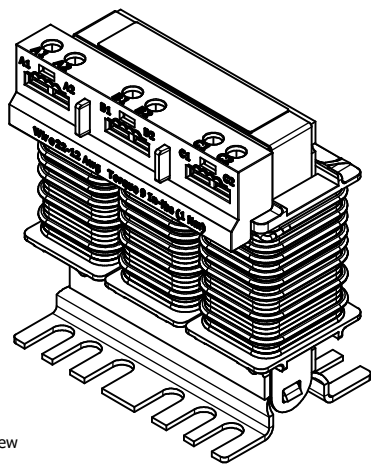



480 Volt,V1k Reactors					
TCI Part#	Motor Amps (A)	Maximum Amps (A)	Max Voltage (V)	Inductance (uH) +/-10%	Weight (LBS)
KDRAA3R2	2	2	600	2200	2.8
KDRAA4R2	3	3	600	2200	2.8
KDRAA5R2	4	4	600	2200	2.8
KDRAA6R2	6	6	600	2200	2.8
KDRAA7R2	8	8	600	1200	2.8
KDRAA8R2	12	12	600	1200	2.8

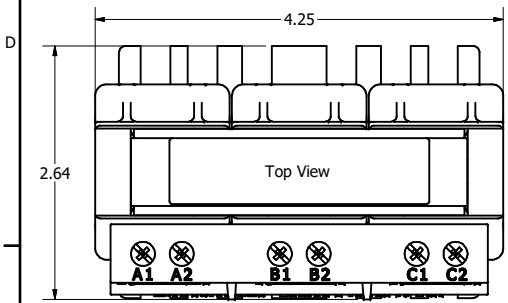


Wire Range: 22-12 AWG.  
Torque : 9 In-lbs (1 Nm)

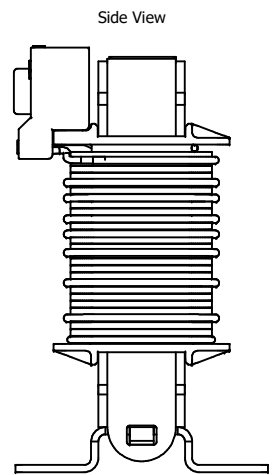

## V1K SCHEMATIC

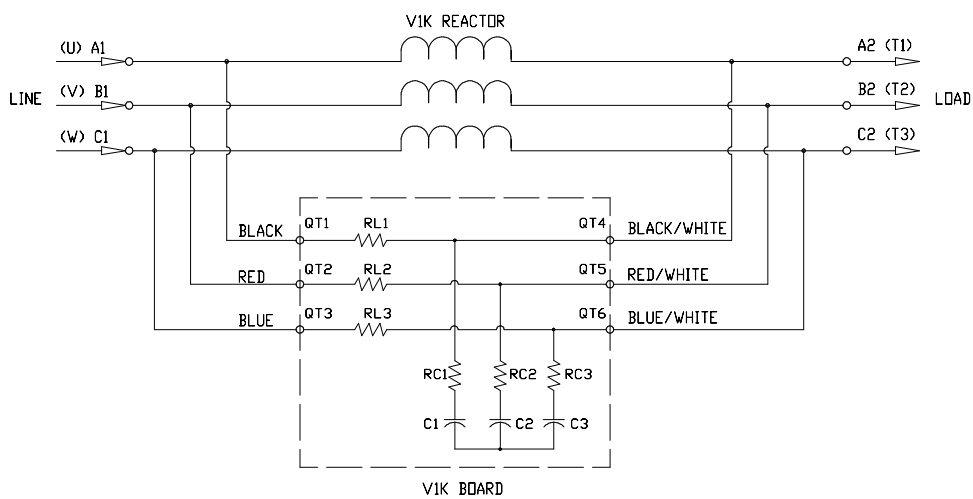

- Notes: 1. UL file number: cULus Listed File E116124.  
2. V1K Drive Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.  
3. V1K IOM Manual Part Number 25316  
4. Material(s) Shall be RoHS Compliant  
5. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

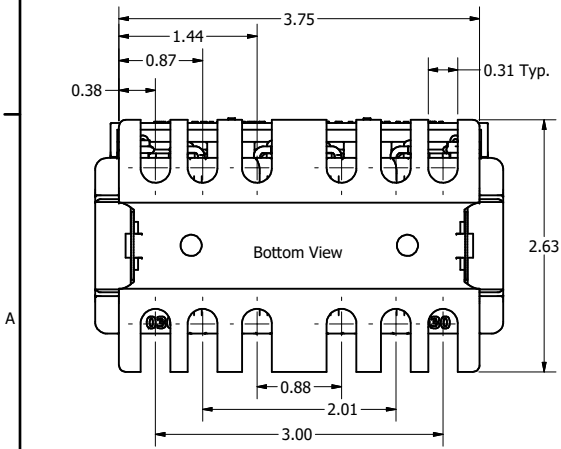

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .03 .XXX ± .010 FRACTIONAL ± 1/32 ANGULAR ± 1°				<b>TCI</b> An Official Motion Company V1K AA Frame Reactor Drawing W132N10611 (Rev 1) Feb 2022 © 2021 TCI, LLC			
As Designed	04/19/21	JRN		DATE	04/19/21	108577DG	SHT 1 OF 1				
REVISION	DATE	BY		SCALE	1:1						