

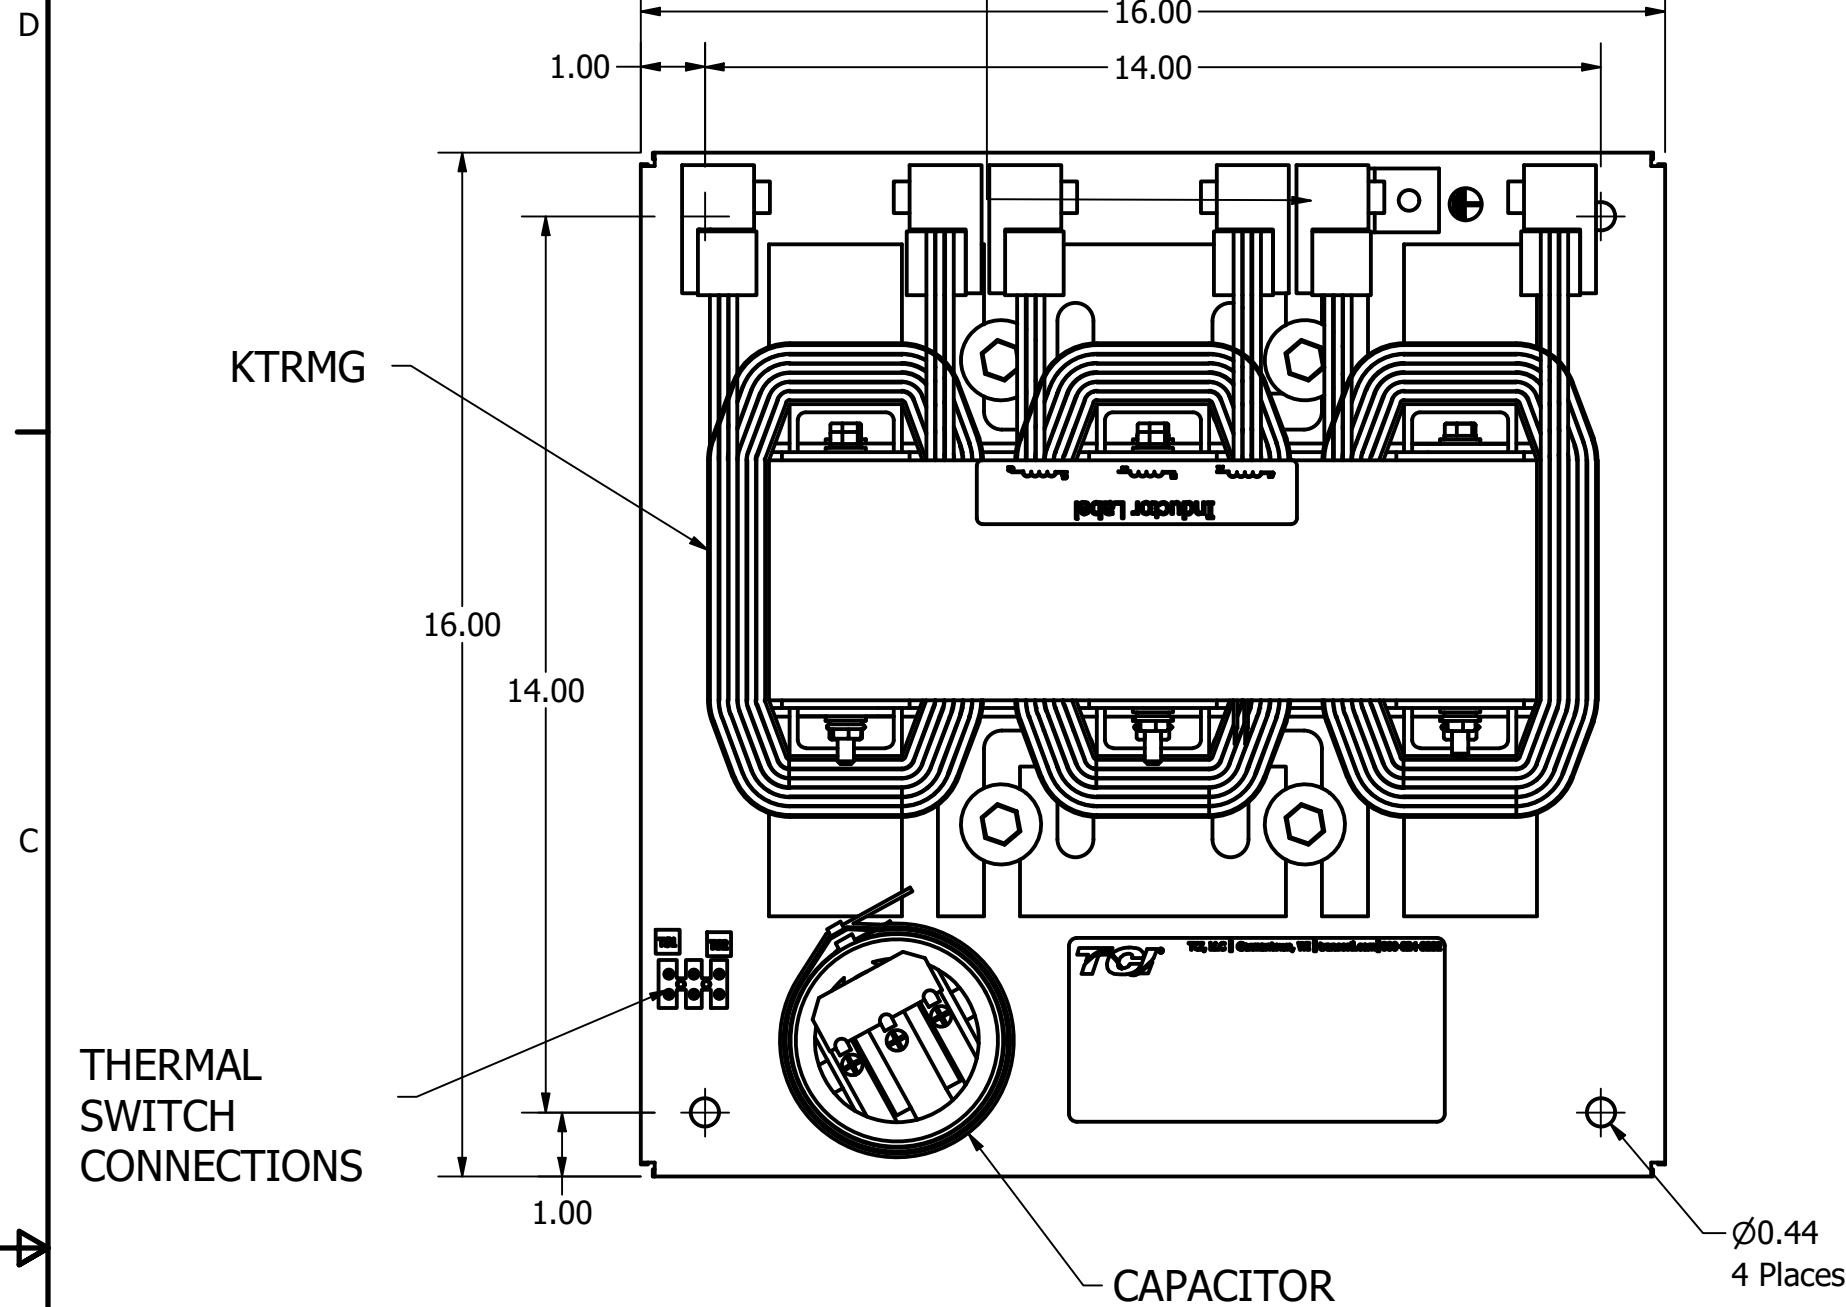
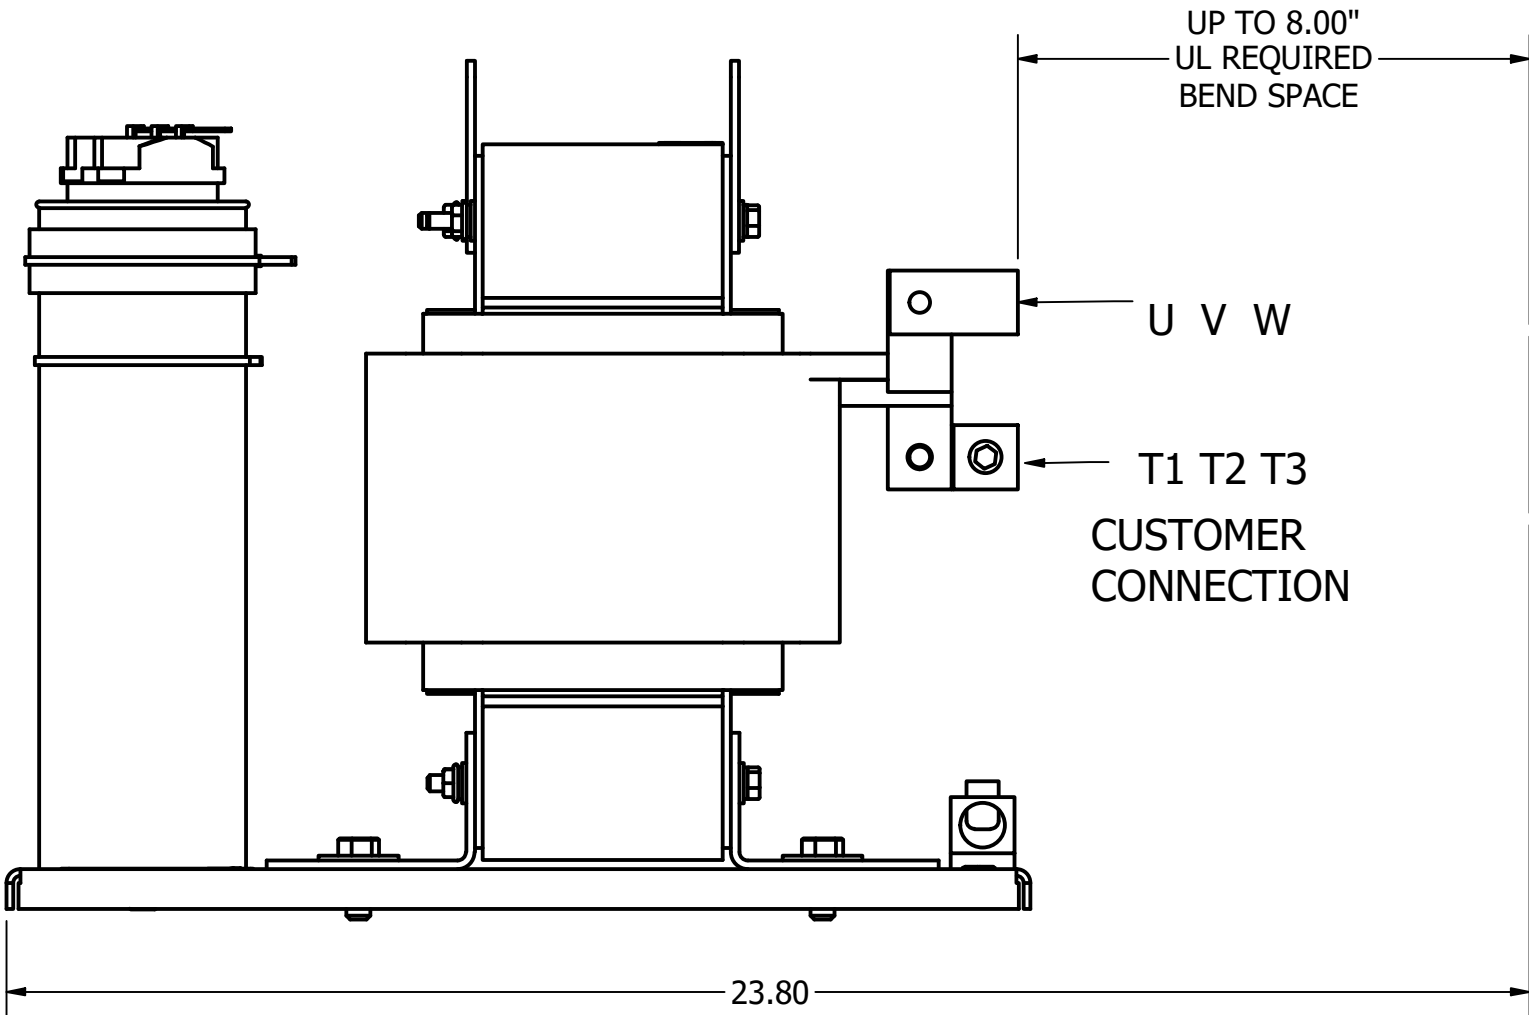
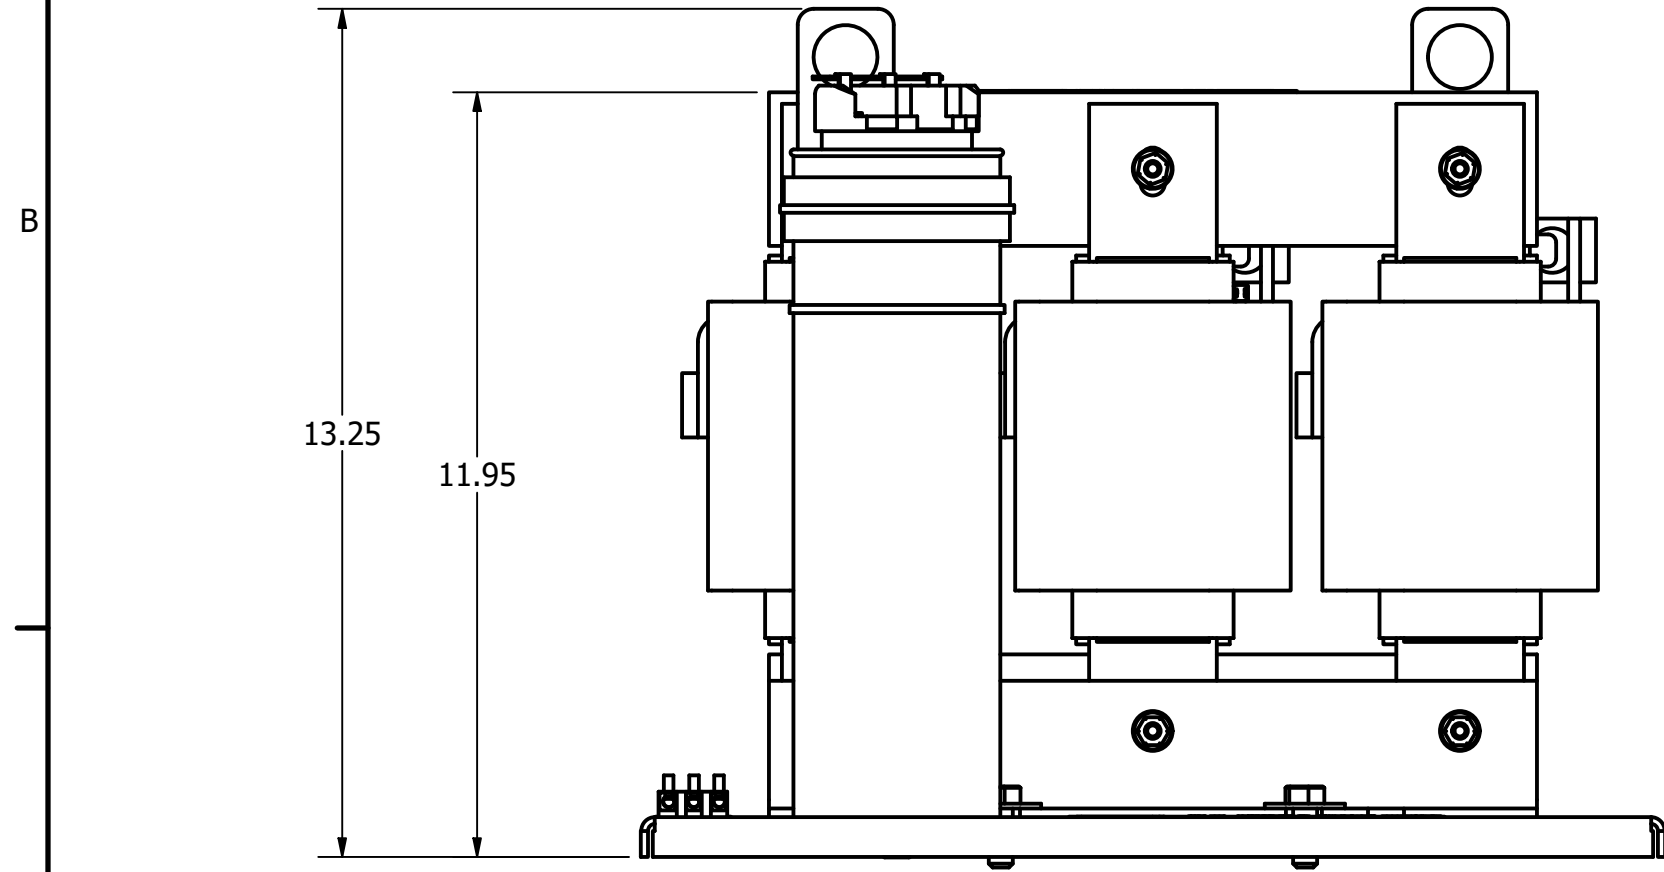


MSD PART NUMBER	HP	VOLT	CURRENT	WEIGHT	PRESSURE TERMINAL WIRE RANGE
MSD0160C000	150	600V	160 AMPS	220LBS	250MCM - 1 AWG

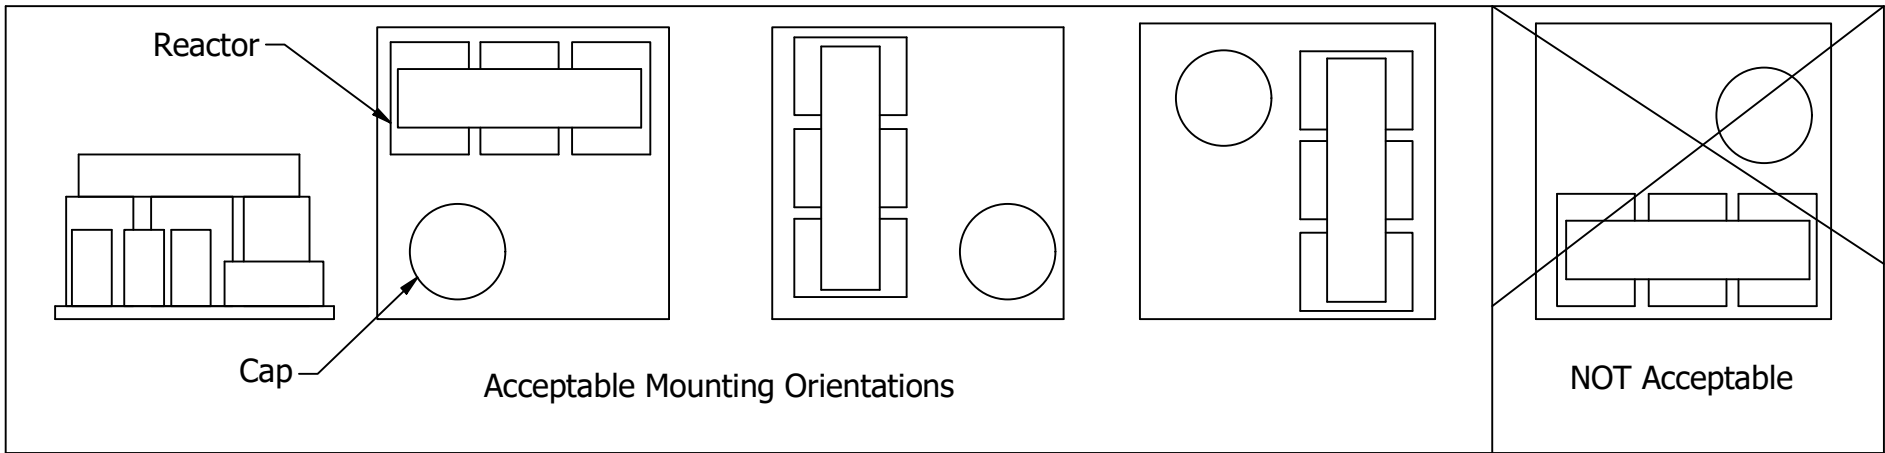

NOTE: FOR WIRE RANGE AND TORQUE INFORMATION SEE IOM MANUAL.

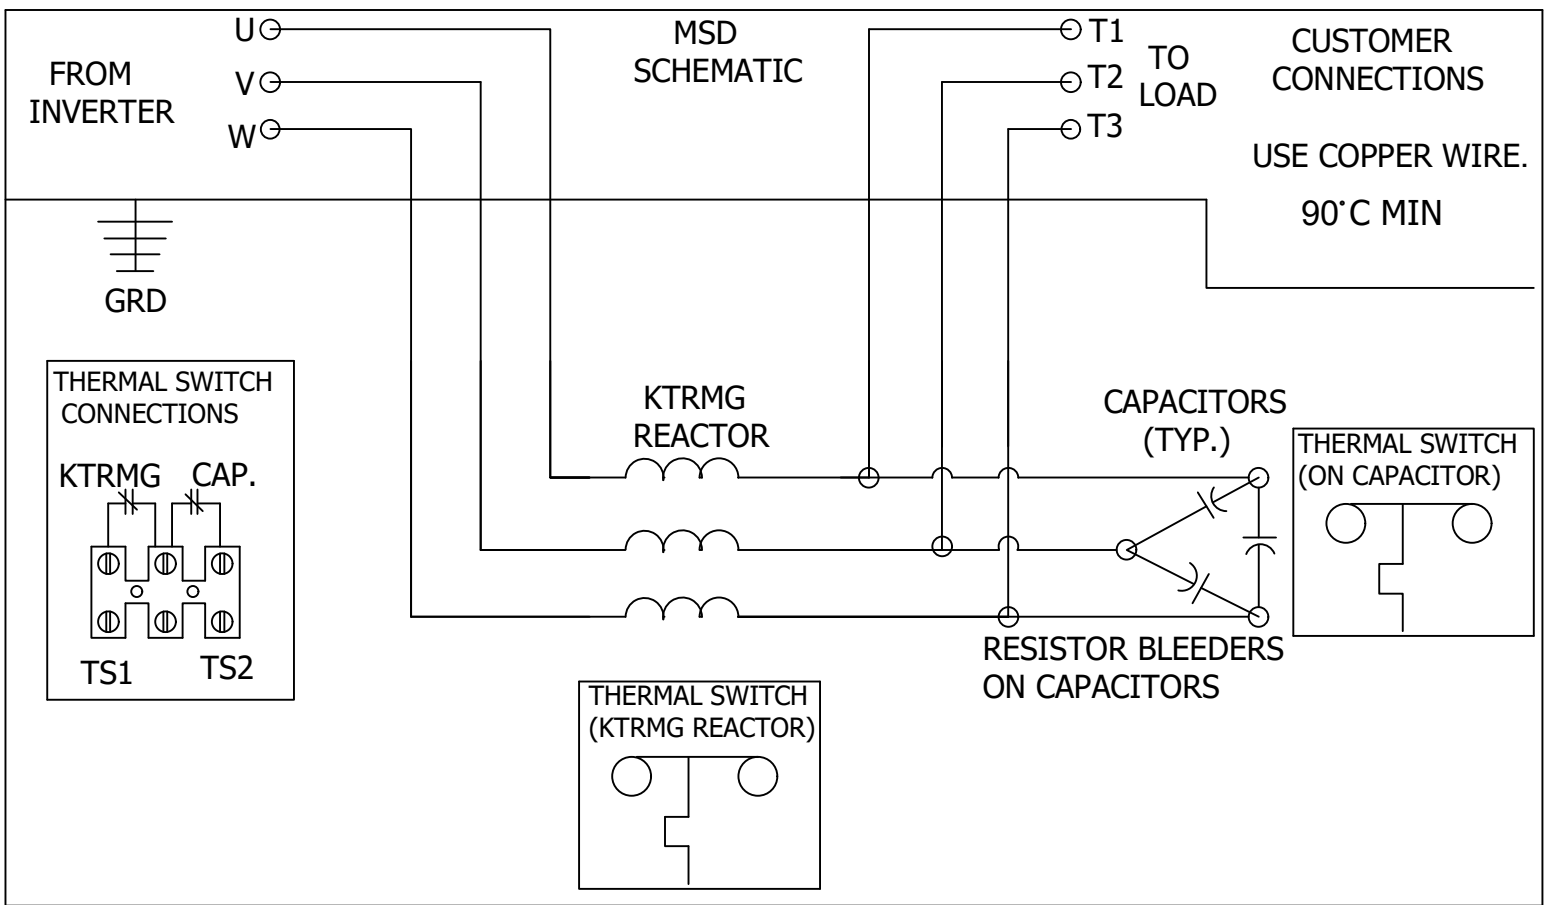

CAPACITOR DISCHARGE LABEL TO SHIP WITH PANEL

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS
CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED)	 An Allied Motion Company MotorShield Sinewave Filter 160 Amp, 600/3/60, Open	W132N10611 Grant Drive Gemantown, WI 53022 © 2022 TCI, LLC	
B	6884 Update Table Label	12/12/24	JRN	FRACTIONAL ± 1/32			
A	As Designed	12/07/22	JRN	ANGULAR ± 1°			
NO	REVISION	DATE	BY				
				SCALE: 1/3	APRVD:	SIZE: C	SHT. 1 OF 1