480 Rated Voltage, 600 Max Voltage, Output							
Part Number	Horsepower (HP)	Maximum Amps (A)	---uH+/-10%	Weight (LBS)	Losses (W)	Terminal Hole Size (Inches)	Measured Gap
KLR110ACB	75	110	200	35	166	0.28	0.150

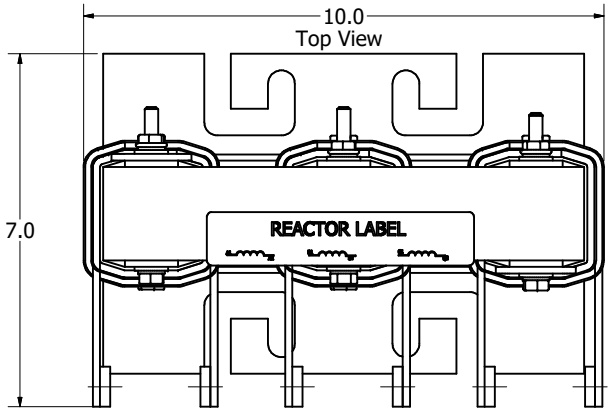

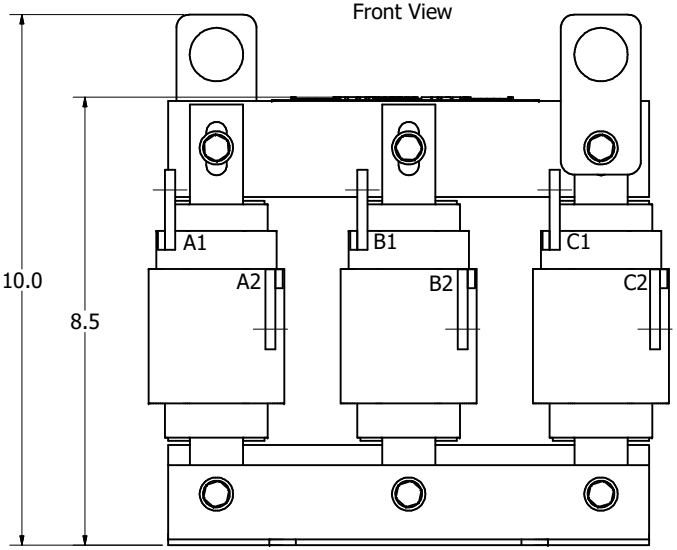

Markings on coil
for reference only.

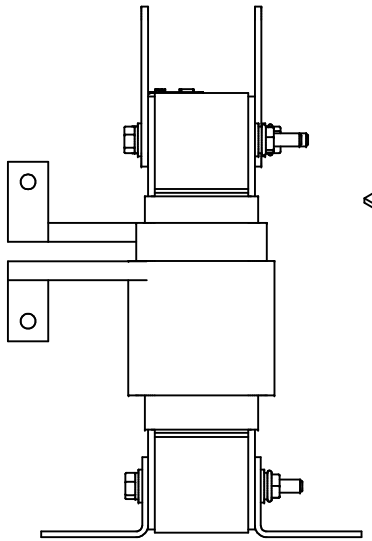

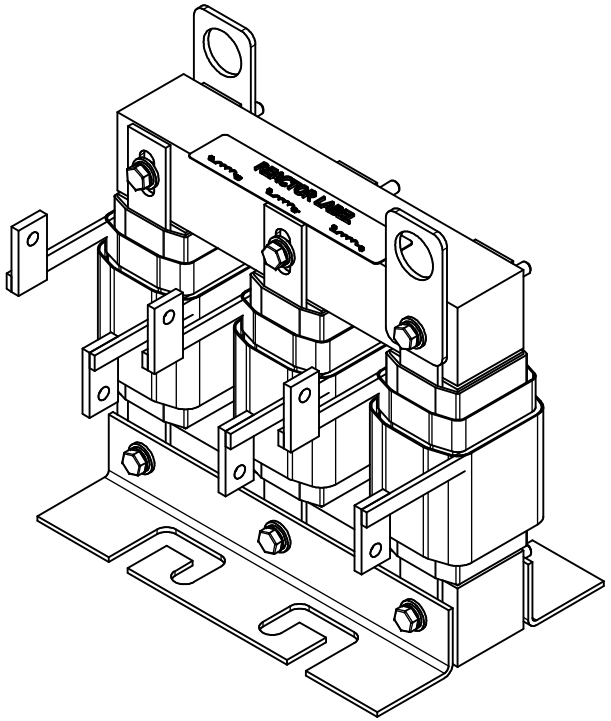

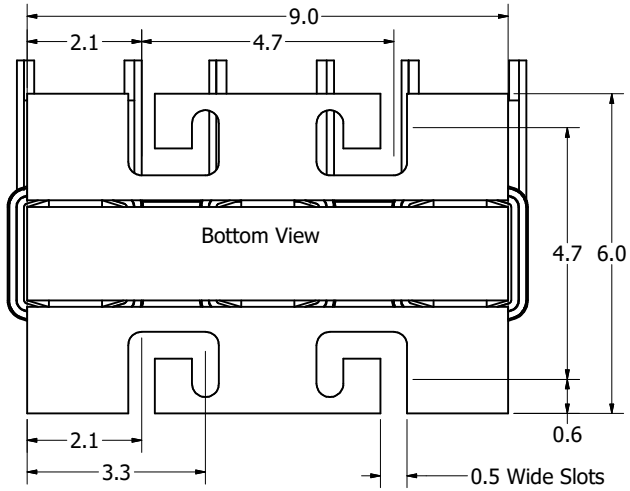



Notes:

1. Material(s) Shall be RoHS Compliant
2. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
B	6535, Termination change to 32766	1/22/2024	DSW
A	Was KLR-25	10/30/2023	DSW

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .25
.XXX ± .10
FRACTIONAL
± 1/32
ANGULAR
± 1°

TCI
An Allied Motion Company
W132N10611 Grant Drive
Germantown, WI 53022
© 2024 TCI, LLC

KLR110ACB
480V, 75HP, 3 Phase, UL Recognized

DRN. BY: DSW | DATE: 10/30/2023 | 109518DG
SCALE: 1:1.6 | APRVD: | SIZE: C | SHT 1 OF 1