

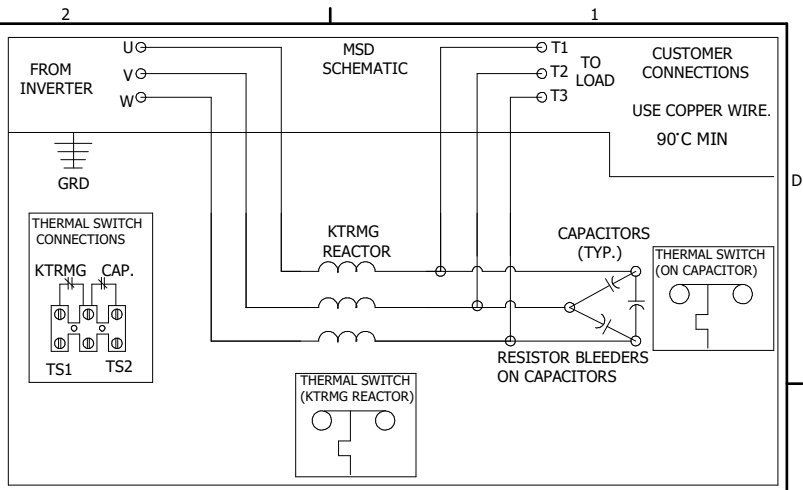
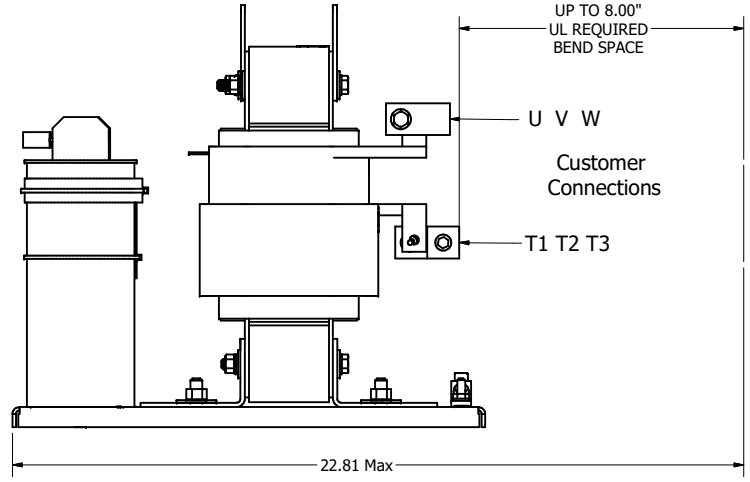
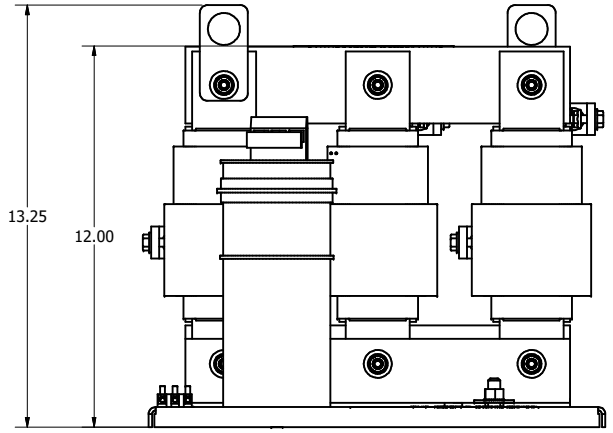


MSD PART NUMBER	HP	VOLT	CURRENT	WEIGHT	PRESSURE TERMINAL WIRE RANGE	BEND SPACE
MSD0042B000	15	240V	42 AMPS	120LBS	2/0 - 14AWG	6.00"
MSD0054B000	20	240V	54 AMPS	120LBS	2/0 - 14AWG	6.00"
MSD0068B000	25	240V	68 AMPS	130LBS	250MCM -1 AWG	8.00"

NOTE: FOR WIRE RANGE AND TORQUE INFORMATION SEE IOM MANUAL.

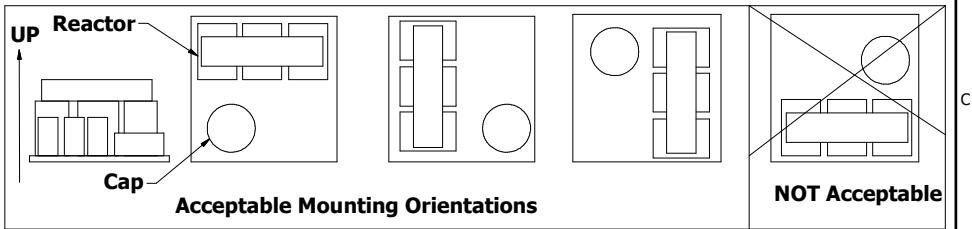

USE COPPER WIRE.
90°C MIN

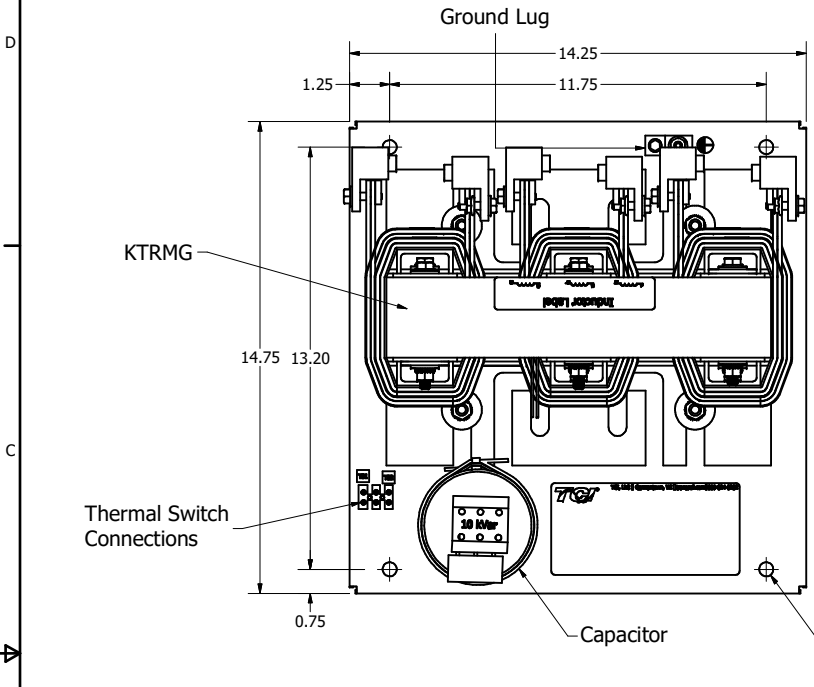

Customer Is Responsible For Proper Cooling Of Filter Components
 Capacitors Maximum Ambient 50°C.

Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

CAPACITOR DISCHARGE LABEL TO SHIP WITH PANEL

DIMENSIONS IN INCHES (EXCEPT AS NOTED) TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/16 ANGULAR ± 1°		THE INFORMATION AND DESIGN CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.		DESIGNED BY: JRN	DATE: 12/30/24		W132N10611 Grant Drive Germantown, WI 53022 © 2026 Allient Inc.
NO ECO		REVISION	DATE	BY	SCALE: 1/3		MotorShield Sinewave Filter 42-68 Amp, 240/30/60, Open