
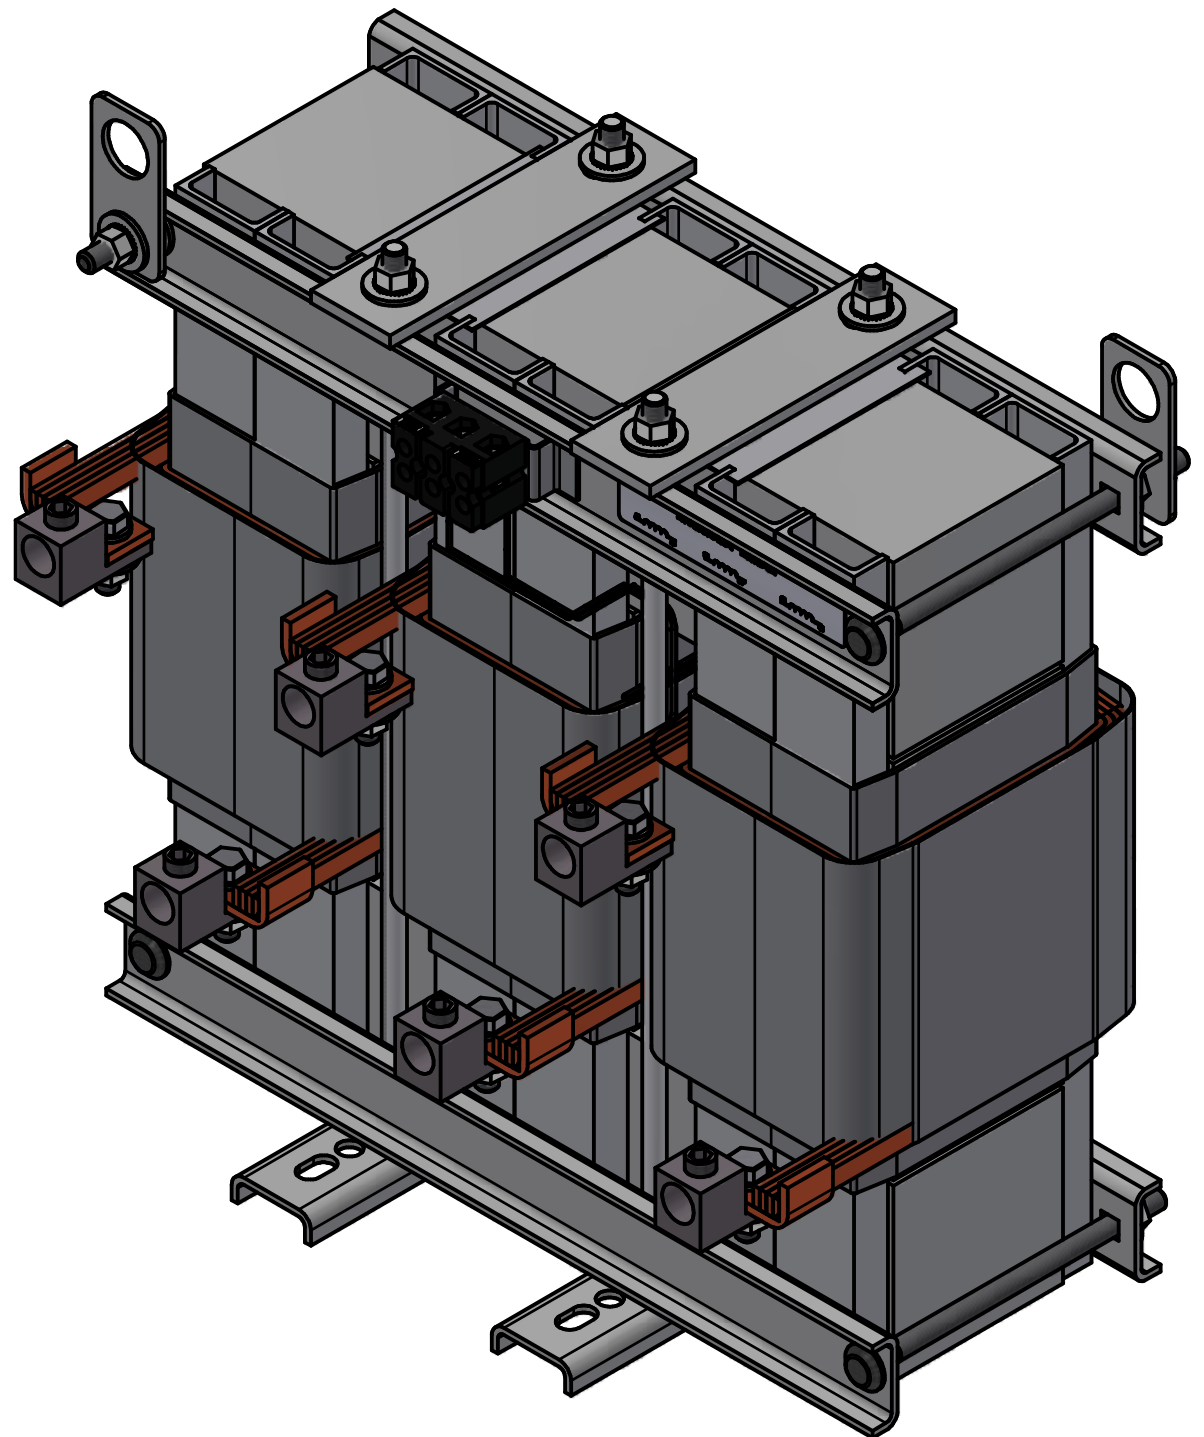


Thermal Switch
Terminal Block

Wire Range: 18 AWG To 4 AWG.
Torque: 20 LB-IN (2.3 Nm)
Switch Opens on Temperature Rise
Contact Rating: 6A @ 120 VAC

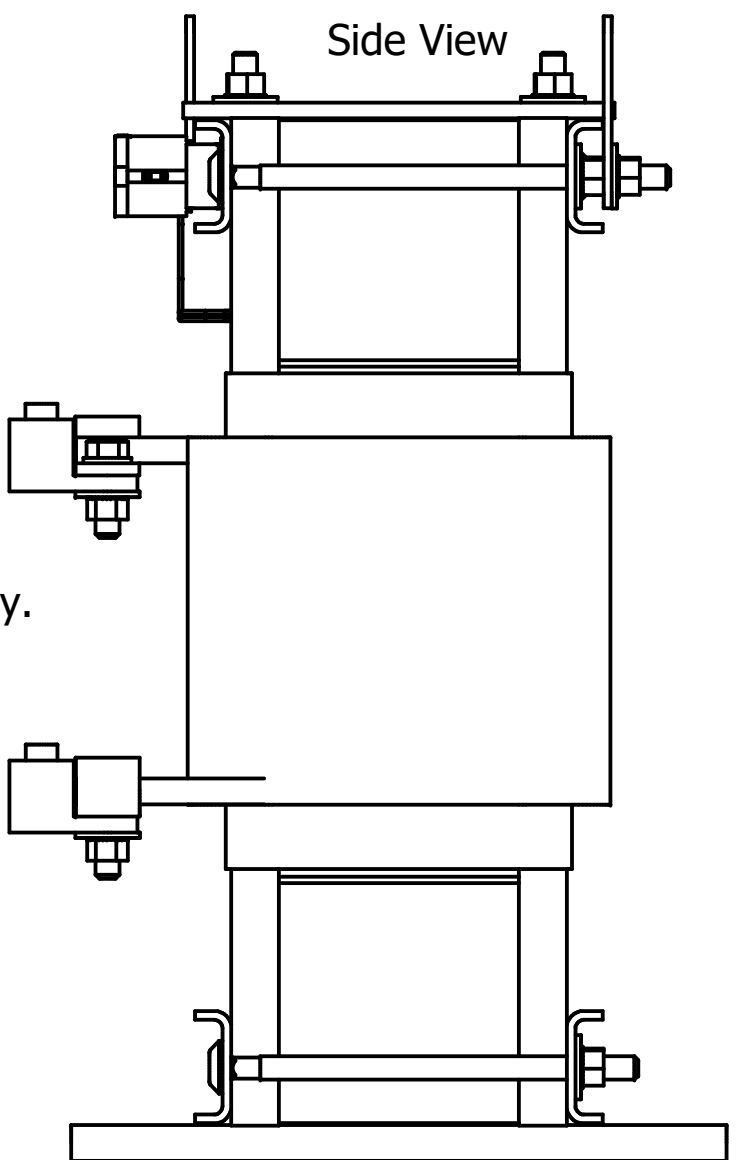

TCI Part Number	Rated Amps (A)	Rated Voltage (V)	Hz	---uH ±5%	Approx Weight (LBS)	Attached Lug Kit
KTRMG200CX2	200	600	60	299	280	SLK11

Wire Range	Tightening Torque
250MCM - 2 AWG	375 Lbs-In (42.4 N-m)
(1), (2) 25-16 mm ²	
(1) 35 mm ²	275 Lbs-In (31.1 N-m)

- Notes:
- UL file number: cULus Listed File E116124.
 - KTRMG Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
 - Material(s) Shall be RoHS Compliant
 - Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

DIMENSIONS IN INCHES (EXCEPT AS NOTED) TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/16 ANGULAR ± 1°	THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.					DRN. BY JRN		W132N10611 Grant Drive Germantown, WI 53022 © 2025 Allient Inc.	
						DATE 05/22/25			
		KTRMG---C, 200A, 600V Reactor Drawing, With Lugs							
		SCALE 1/2	DRN. NO. 109788DG	SIZE C	SHT.1 OF 1				
		NO	ECO	REVISION	DATE	BY			