
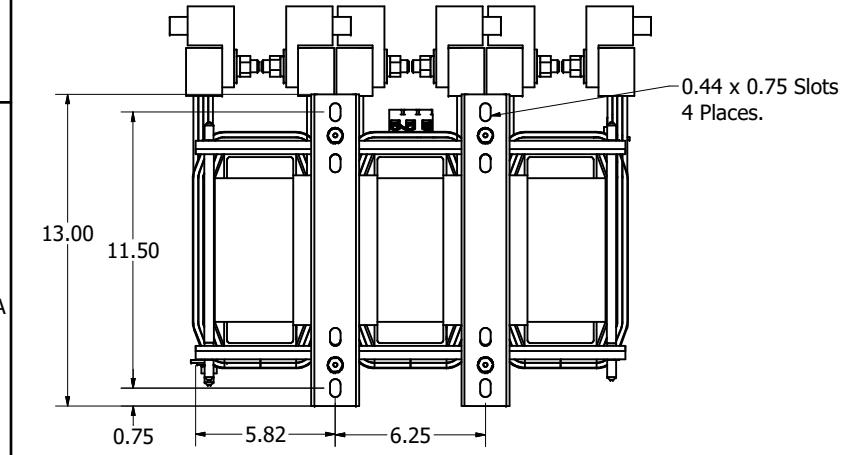
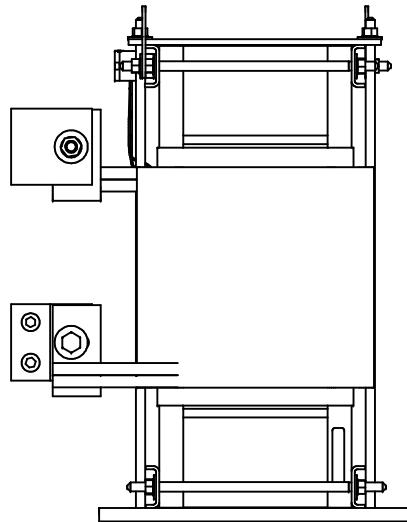



Thermal Switch Terminal Block

Wire Range: 18 AWG To 4 AWG.
Torque: 20 LB-IN (2.3 Nm)

Switch Opens on Temperature Rise
Contact Rating: 6A @ 120 VAC

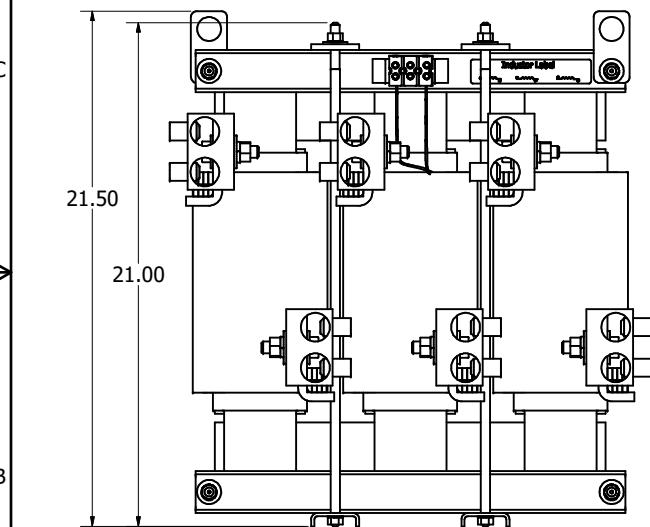

| TCI Part Number | Rated Amps (A) | Rated Voltage (V) | Hz | ---uH ±5% | Approx Weight (LBS) | Attached Lug Kit |
|-----------------|----------------|-------------------|----|-----------|---------------------|------------------|
| KTRMG750AX3 | 750 | 480 | 60 | 64 | 575 | SLK15 |

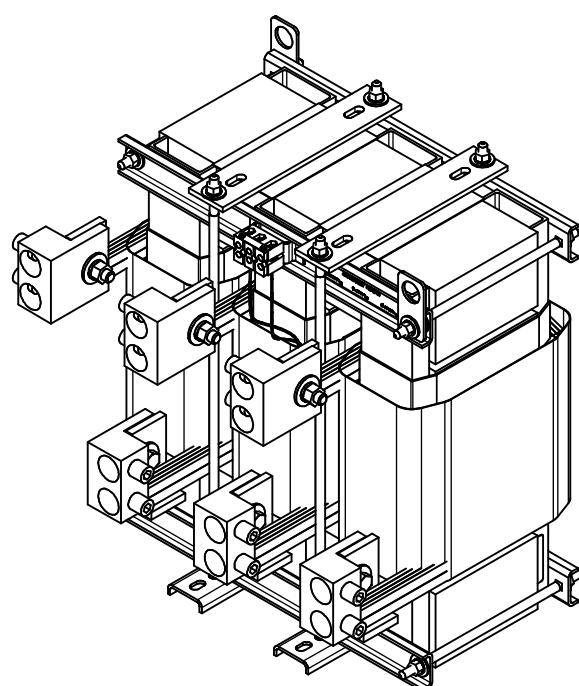

| Wire Range | Tightening Torque |
|--------------------|-----------------------|
| 800MCM Thru 300MCM | 500 Lbs-In (56.5 N-m) |

Notes:

1. UL file number: cULus Listed File E116124.
2. KTRMG Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
3. Material(s) Shall be RoHS Compliant
4. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

| DIMENSIONS (EXCEPT AS NOTED) | | THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE THE PROPRIETARY PROPERTY OF ALIENT INC. AND ITS SUBSIDIARIES. NO PART OF THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS EXCEPT WITHOUT THE EXPRESS WRITTEN CONSENT OF ALIENT INC. AND ITS SUBSIDIARIES. | | DRN. BY | TJS | DATE |
|------------------------------|-------------|---|----------|---------|------|------------|
| XX | ± 25 | | | | | |
| XXX | ± 10 | | | | | |
| FRACTIONAL | | | | | | |
| ± 1/16 | | | | | | |
| ANGULAR | | | | | | |
| ± 1° | | | | | | |
| NO ECO | As Designed | REVISION | 08/29/25 | TJS | DATE | 08/29/25 |
| | | | | BY | | |
| SCALE | 1/4 | DRN. NO. | 109803DG | 1 | EC | SHT.1 OF 1 |

W132N10611 Grant Drive
Germantown, WI 53022
© 2025 Alient Inc.

Alient
Power
KTRMG, 750A, 480V
Reactor Drawing, With Lugs