



See Website for Electrical Information, Part Numbers Listed below.  
**KDRBA1L, KDRBA2H, KDRBA2L**  
**KDRBA22L, KDRBA23L, KDRBA25H**  
**KDRBA26H, KDRBA42H, KDRBA43H**  
**KDRBA44H, KDRBA43L, KDRBA45L**  
**KDRBA44L.**

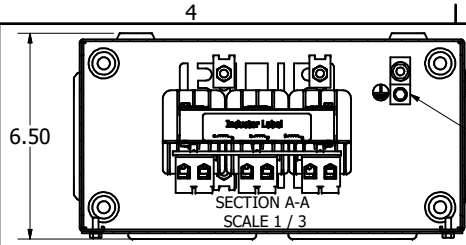





Ground Lug.  
 See IOM Manual, Part# 30895  
 Table S2/0, Wire Size And Torque.

Wire Range: 4-18 AWG.  
 Torque : 20 IN-LBS (2.3 Nm)




- Notes: 1. UL file number: cULus Listed File E116124.  
 2. KDR Drive Inductors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.  
 3. KDR IOM Manual Part Number 30895  
 4. Material(s) Shall be RoHS Compliant  
 5. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

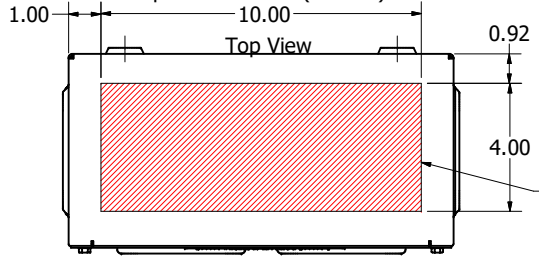

Suggested Customer Wire Entrance  
 Top Of Enclosure.  
 See Note: 5  
 (Non Removeable Panel)

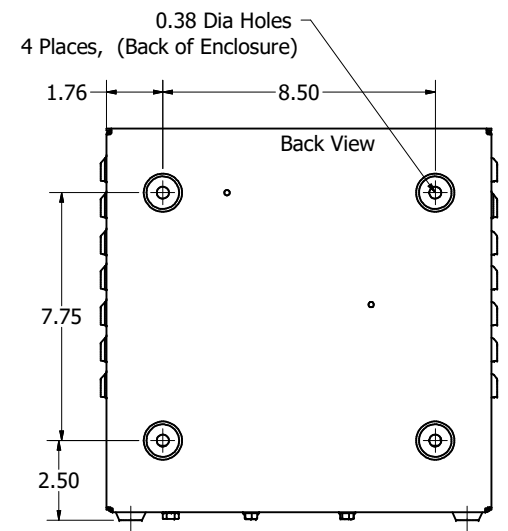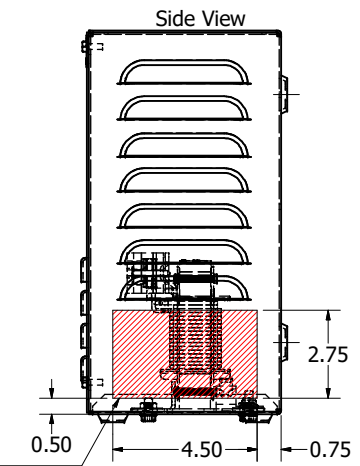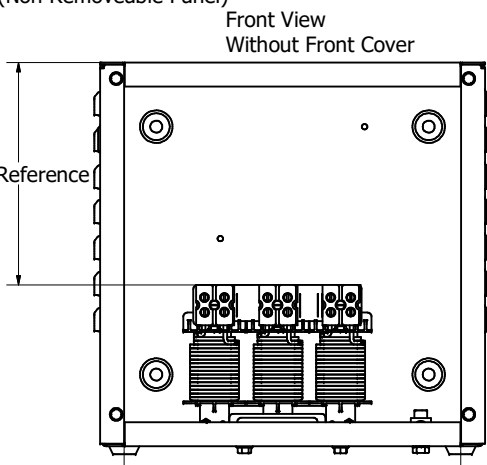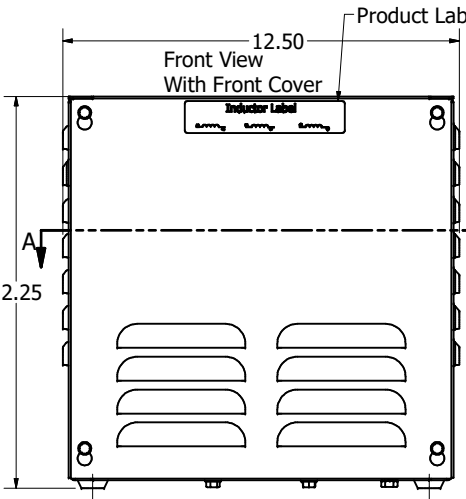

Suggested Customer Entrance  
 Either Side Of Enclosure.  
 See Note: 5  
 (Non Removeable Panel)

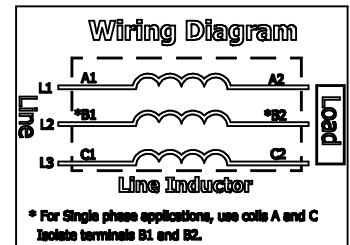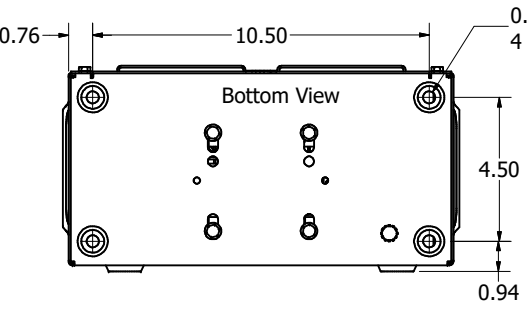

DIMENSIONS IN INCHES (EXCEPT AS NOTED)		TOLERANCES (EXCEPT AS NOTED)		DATE		DRAWN BY		DATE		SCALE		REV. NO.		SHEET	
XX ± .25		XXX ± .10		10/1/25		DSW		10/1/25		1/3		109865-1DG		SHT. 1 OF 1	
ERACTONAL ± 1/32		ANGULAR ± 1°		NO		ECO		REVISION		DATE		BY		SIZE	
THE INFORMATION AND DESIGN CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIANT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIANT INC. AND ITS SUBSIDIARIES.		NO		ECO		REVISION		DATE		BY		SCALE		SHEET	
KDRBA, Inductor Enclosed Type I		Alliant Power		W132N10611 Grant Drive Germantown, WI 53022 © 2025 Alliant Inc.		DSW		10/1/25		1/3		109865-1DG		SHT. 1 OF 1	