




See V1K Installation Guide For Terminal Wire Size And Torque Information.

Note: Maintain Clearance of 3 Inches On All Sides To Other Equipment.





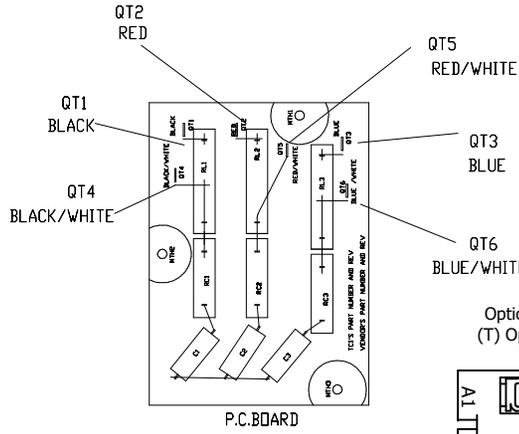


(Customer Connections) Markings On Terminal Block For Reference Only.

Optional: Thermal Switch (T) Option in Part Number

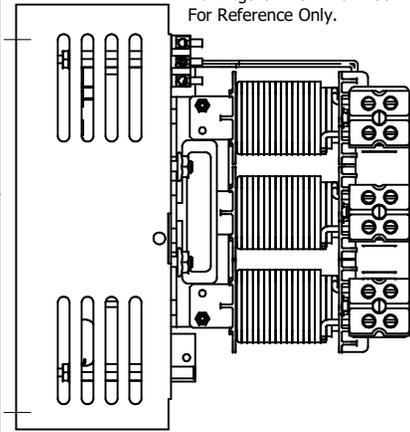


Mounting Orientation-Up

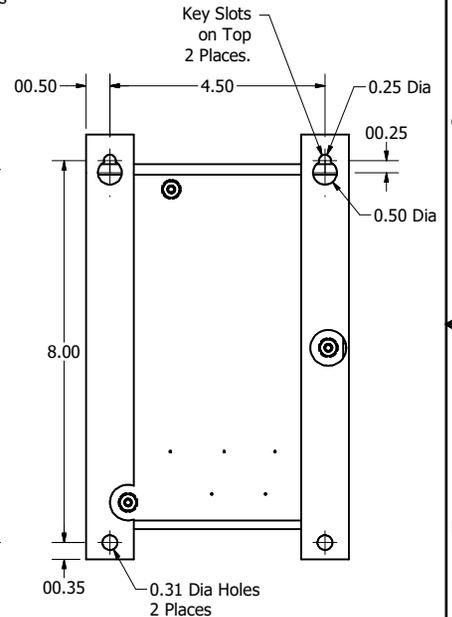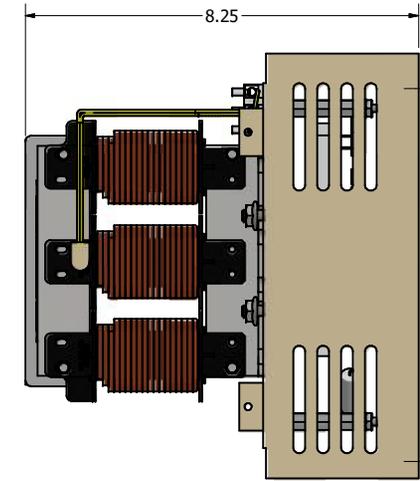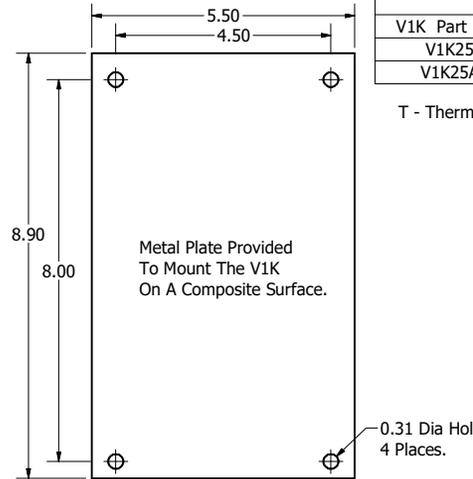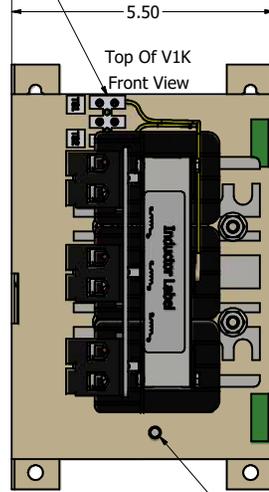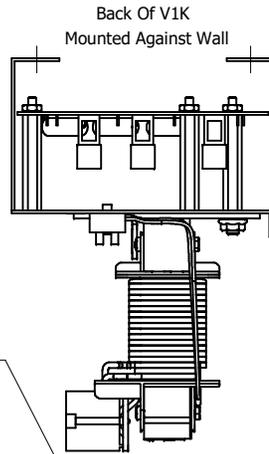

V1K Open Units				
V1K Part Number	Max Voltage	Amps	Phase	Weight (LBS)
V1K25A00	600	25	3	12
V1K25A00T	600	25	3	12

T - Thermal Switch Option

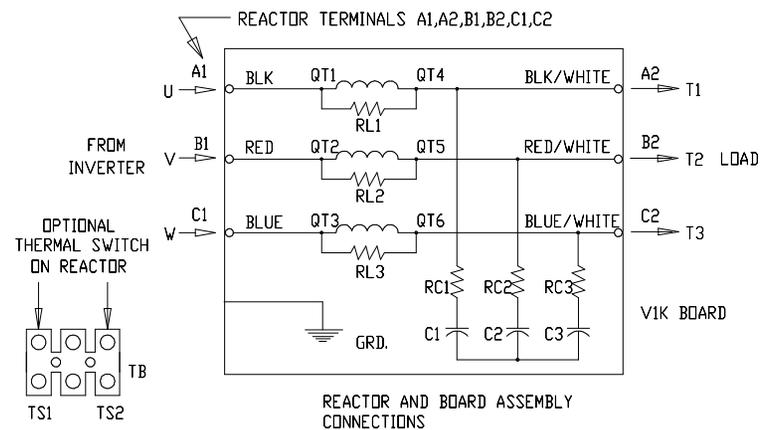

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

DIMENSIONS IN INCHES (EXCEPT AS NOTED) TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/32 ANGULAR ± 1°		THE INFORMATION AND DESIGN CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.		DES BY: DSW	DATE: 12/2/25	REV: C	7396	Update Inductor Views	2/11/26	DSW		W132N10611 Grant Drive Germantown, WI 53022 © 2026 Allient Inc.
NO	ECO	REVISION	DATE	BY	SCALE: 1/2	DEN. NO: 109879DG	SIZE: C	SHT. 1 OF 1				