
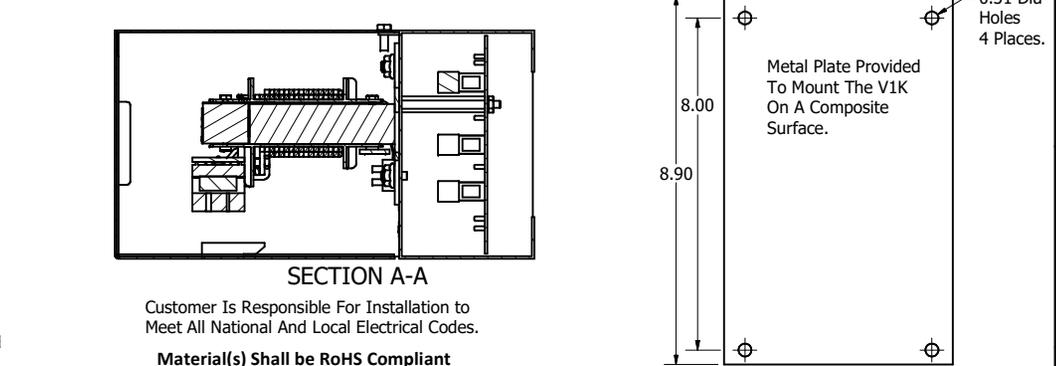
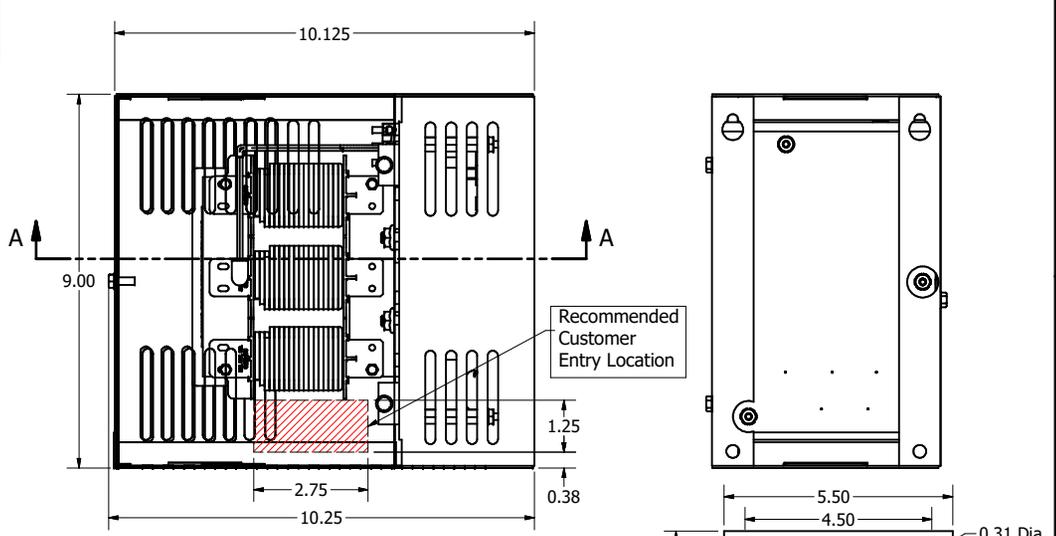
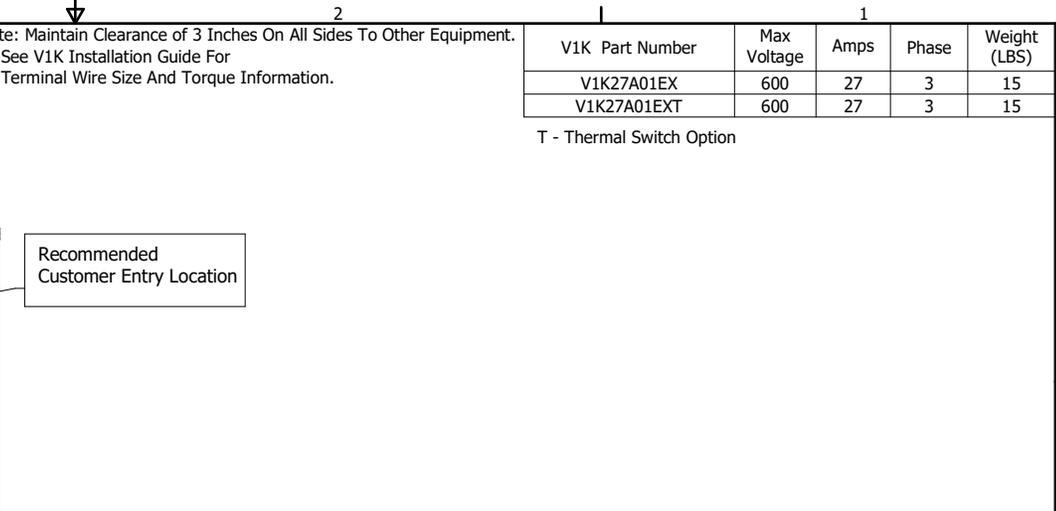


Note: Maintain Clearance of 3 Inches On All Sides To Other Equipment.
See V1K Installation Guide For Terminal Wire Size And Torque Information.

V1K Part Number	Max Voltage	Amps	Phase	Weight (LBS)
V1K27A01EX	600	27	3	15
V1K27A01EXT	600	27	3	15

T - Thermal Switch Option

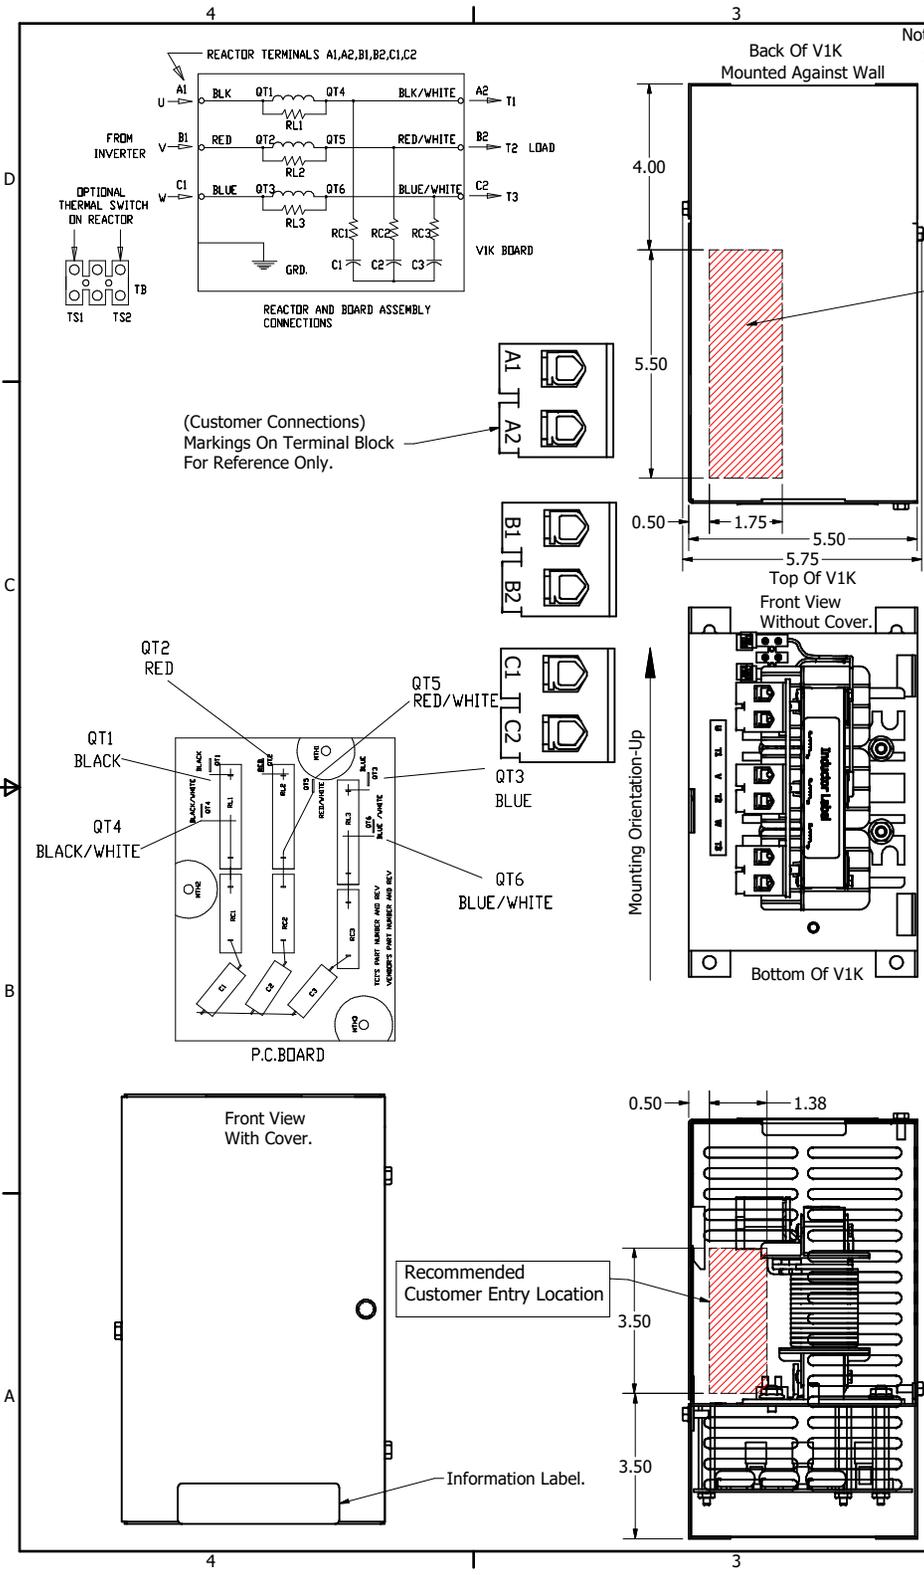

Material(s) Shall be RoHS Compliant

DIMENSIONS IN INCHES (EXCEPT AS NOTED). TOLERANCES (EXCEPT AS NOTED): DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL 1/32 ANGULAR ± 1°		THE INFORMATION AND DESIGN CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.		DESIGNED BY DSW	DATE 02/13/26	SCALE 1:2.3	DWG. NO. 109880-1DG	SIZE C	W132N10611 Grant Drive Germantown, WI 53022 © 2026 Allient Inc.
NO ECO REVISION		A 7396 KDRB2Q to KDRBA2Q		DATE	BY	V1K, Enclosed Type 1, Heavy Duty 27 Amps		SHEET 1 OF 1	