

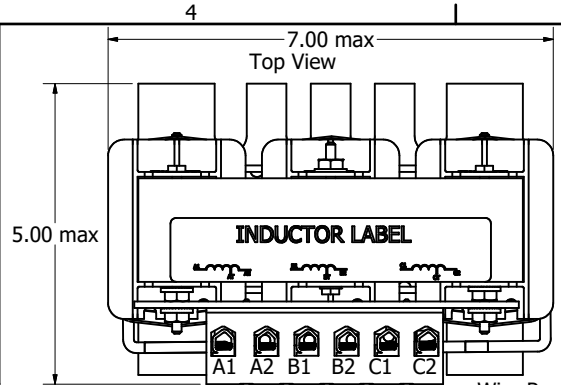

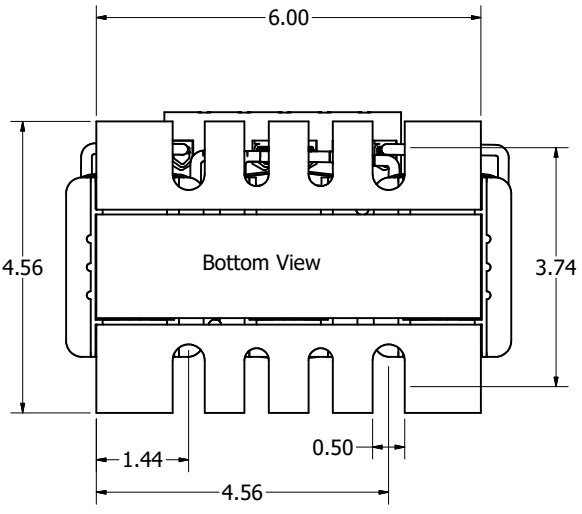
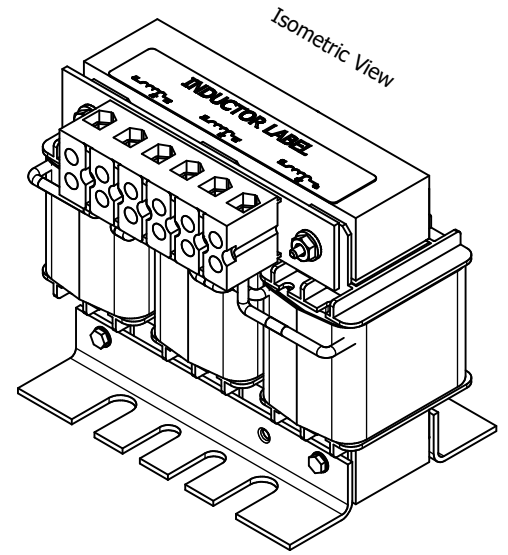


575 Rated Voltage, 600 Max Voltage, Low Z, Impedance.					
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Weight (LBS)
KDRE44L	50	52	52	529	16

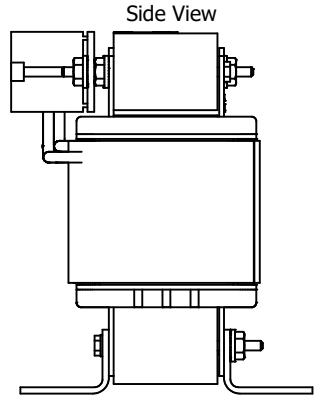

Wire Range: 4-18 AWG.
Torque : 20 IN-LBS (2.3 Nm)

(Customer Connections)
Markings On Terminal Block
For Reference Only.

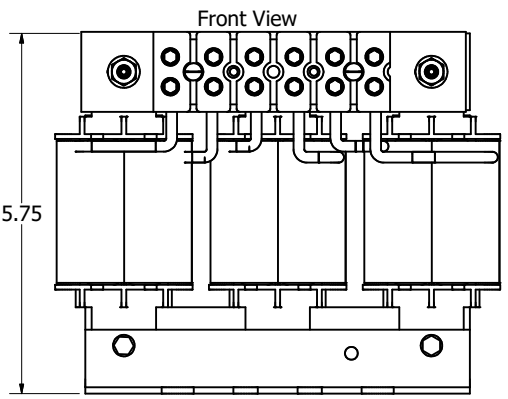

Notes:

1. UL file number: cULus Listed File E116124.
2. KDR Line Inductors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
3. KDR IOM Manual Part Number 30895
4. Material(s) Shall be RoHS Compliant
5. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.
6. Dimensions are in inches unless otherwise specified.

TOLERANCES (EXCEPT AS NOTED): DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/32 ANGULAR ± 1°	THE INFORMATION AND DESIGN CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALIENT INC. AND ITS SUBSIDIARIES.	DESIGNED BY MY DATE 3/23/26		W132N10611 Grant Drive Germantown, WI 53022 © 2026 Allient Inc.
NO ECO REVISION		DATE 03/23/26	SCALE 1/1.5	KDRE44L 50HP, 52Amp 109909DG