



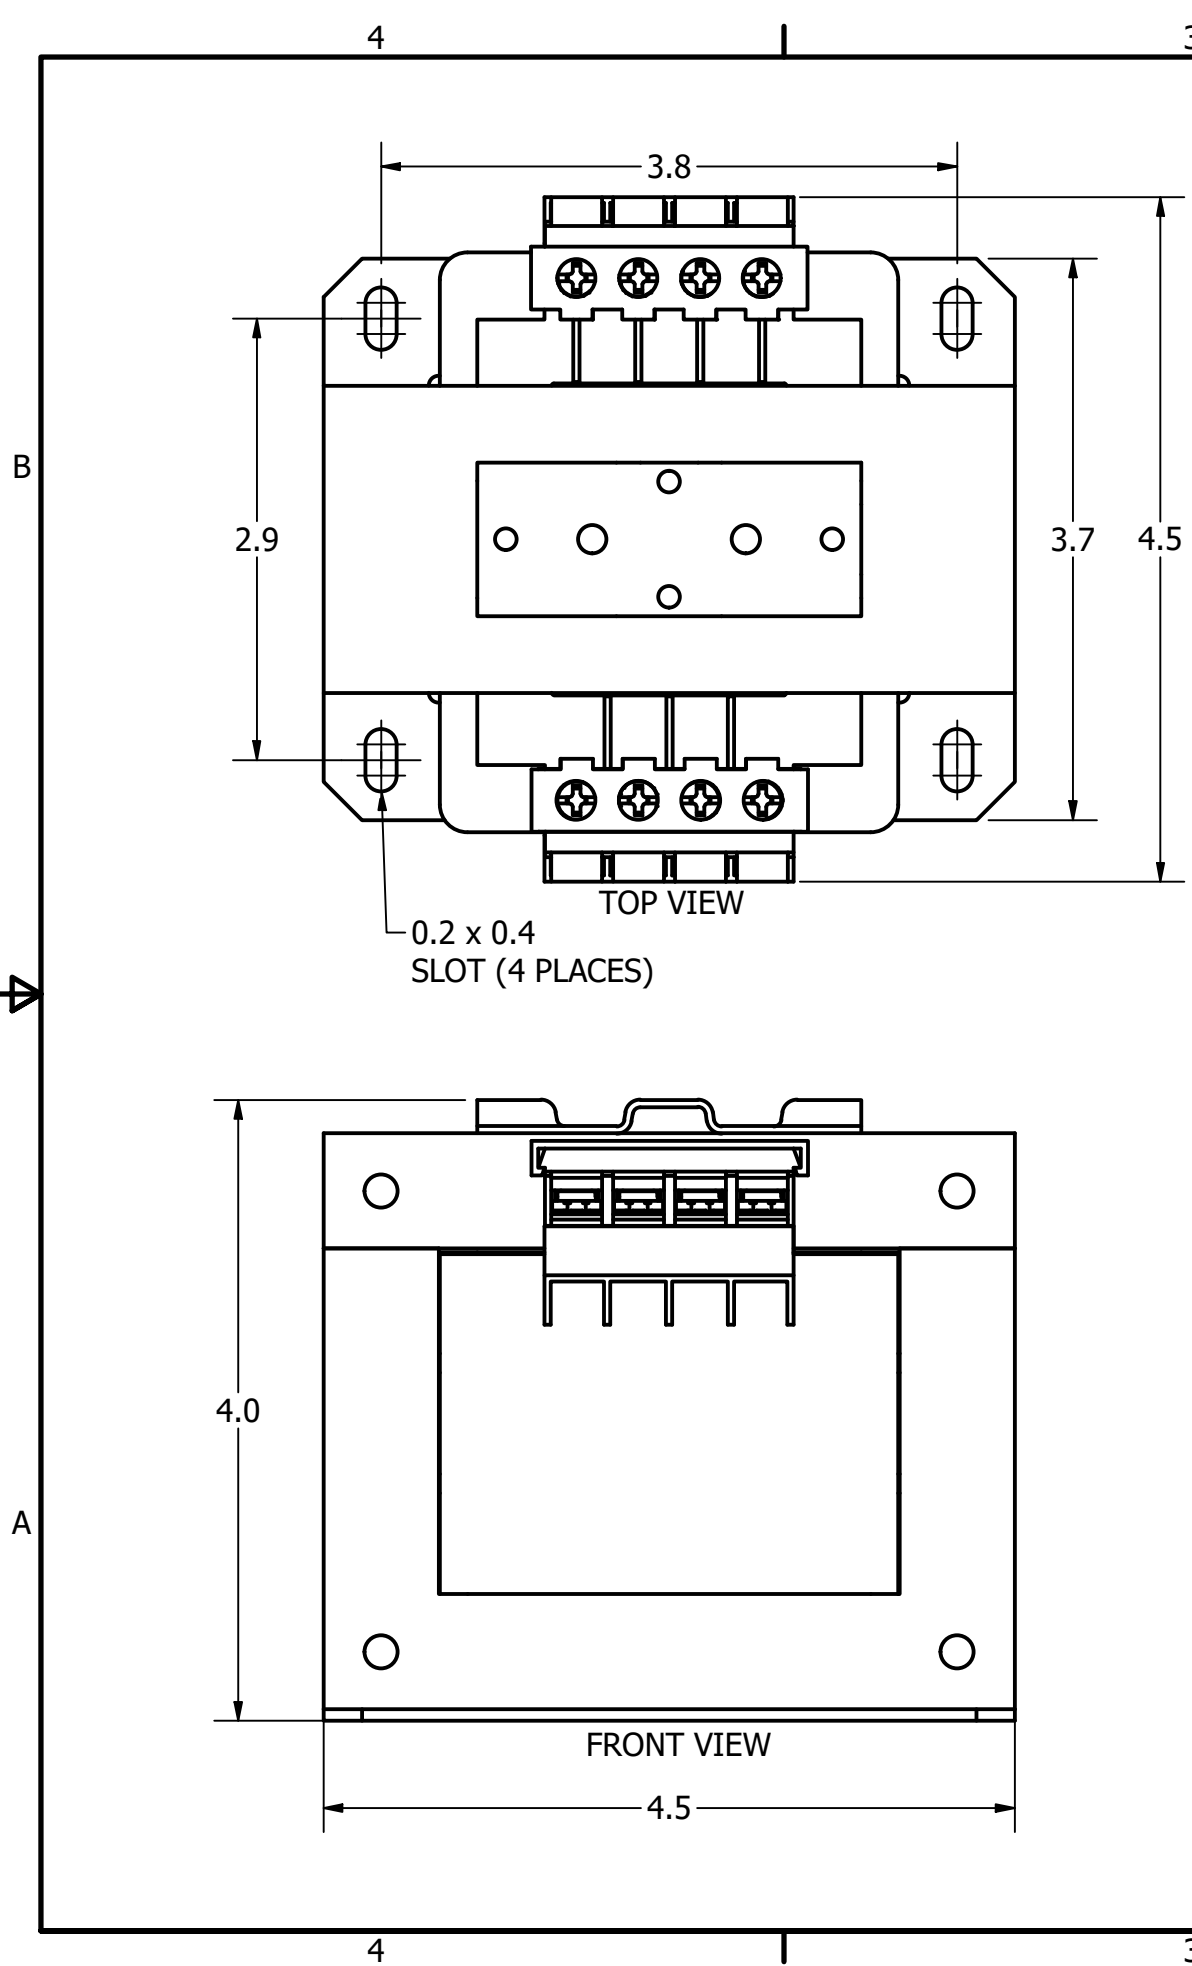

Voltage Group	Part Number	Description
A	BB250DMF	CPT, CTL XFMR, 250VA, 220x440, 230x460, 240x480:110,115,120
B	BB250BSF	CPT, CTL XFMR, 250VA, 240x480 : 24
C	BB250ASF	CPT, CTL XFMR, 250VA, 120x240:24
E	BB250EMF	CPT, CTL XFMR, 250VA, 550/575/600:110,115,120
F	BB250WQF	CPT, CTL XFMR, 250VA, 208/277:120
I	BB250ZPF	CPT, CTL XFMR, 250VA,380/400/415:110/220
J	BB200CLF	CPT, CTL XFMR, 200VA,200/220/440,208/230/460,240/480:23/110,24/115,25/120
K	BB250BAF	CPT, CTL XFMR, 250VA,240x480:120x240

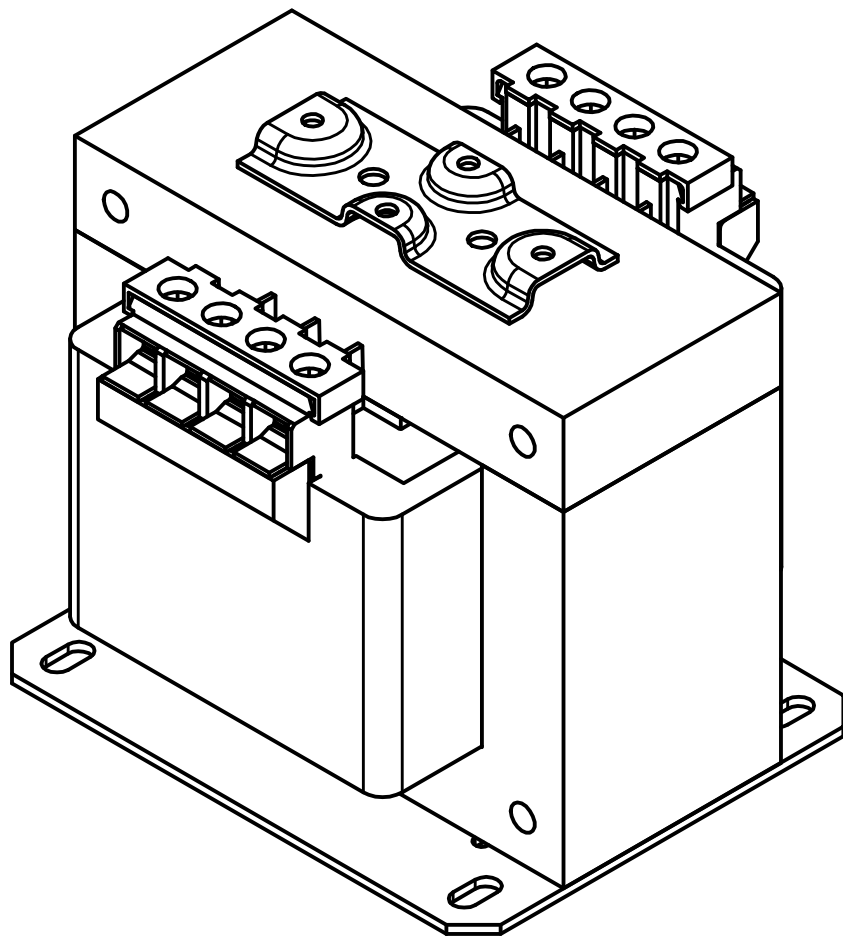

General Specifications	
Rated V.A.	250
Rated Frequency	50/60
Insulation Class	Class 130°C (266°F) Insulation System 80°C (176°F)
Agency Approvals	UL,CUL
Estimated Weight (lbs.)	10.0

Note: For Connection Diagram Please See Catalog 33563

DIMENSIONS IN INCHES (EXCEPT AS NOTED)	THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.						DRN. BY EJB		W132N10611 Grant Drive Germantown, WI 53022 © 2026 Allient Inc.		
							DATE: 05/07/26				
		TOLERANCES (EXCEPT AS NOTED)							CPT CTL XFMR Frame '6'		
		DECIMAL									
		.XX ± .03 .XXX ± .010									
FRACTIONAL ± 1/32 ANGULAR ± 1°											
		A		Release		05/07/26	EJB				
		NO	ECO	REVISION		DATE	BY	SCALE: 1:1.25	DRN. NO. 109946	SIZE B	SHT.1 OF 1