



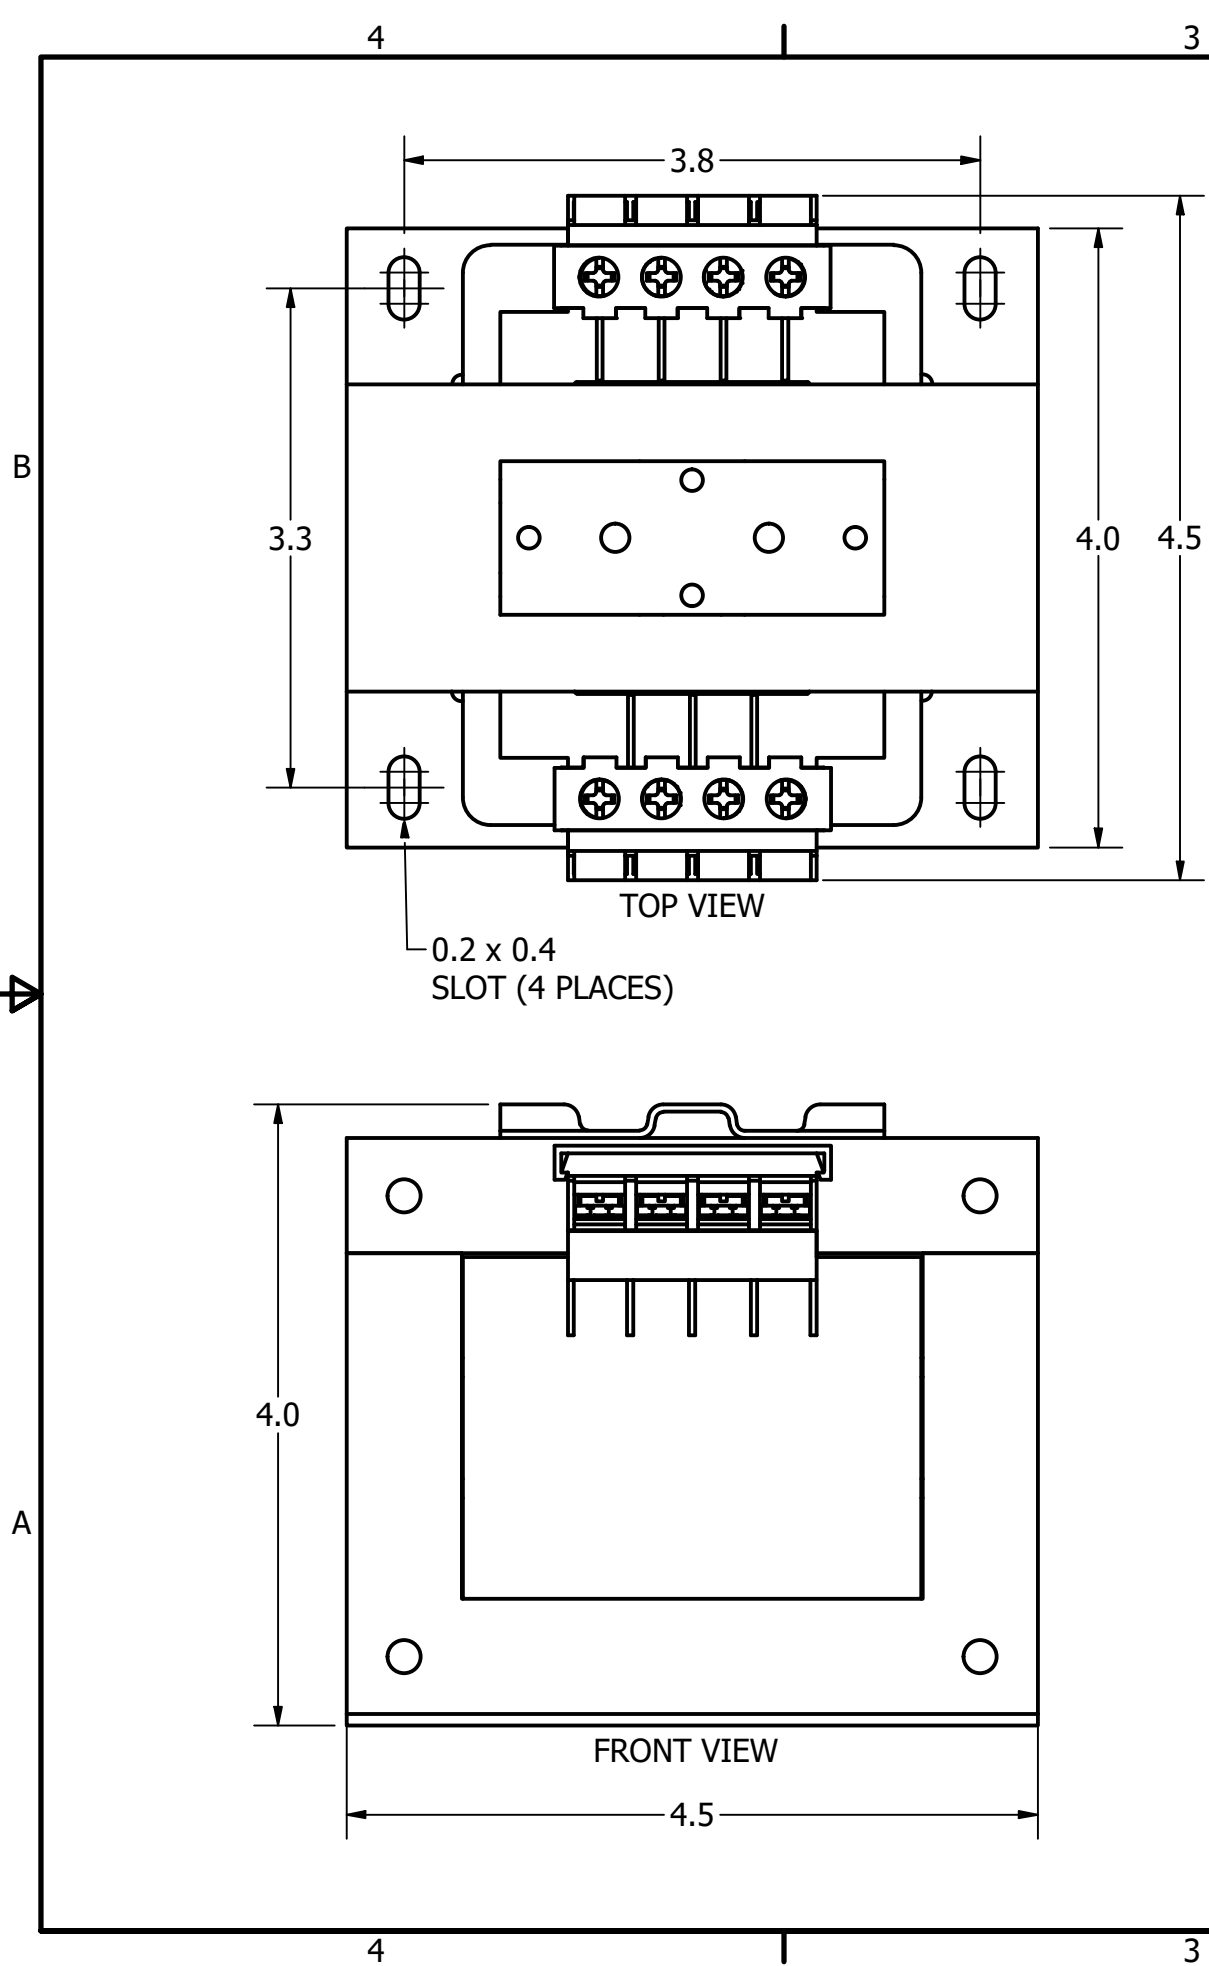

Voltage Group	Part Number	Description
A	BB300DMF	CPT, CTL XFMR, 300VA, 220x440, 230x460, 240x480:110,115,120
B	BB300BSF	CPT, CTL XFMR, 300VA, 240x480 : 24
C	BB300ASF	CPT, CTL XFMR, 300VA, 120x240:24
E	BB300EMF	CPT, CTL XFMR, 300VA, 550/575/600:110,115,120
F	BB300WQF	CPT, CTL XFMR, 300VA, 208/277:120
G	BB250CMF	CPT, CTL XFMR, 250VA, 200/220/440, 208/230/460, 240/480:110,115,120
G	BB300CMF	CPT, CTL XFMR, 300VA, 200/220/440, 208/230/460, 240/480:110,115,120
I	BB300ZPF	CPT, CTL XFMR, 300VA,380/400/415:110/220
K	BB300BAF	CPT, CTL XFMR, 300VA,240x480:120x240

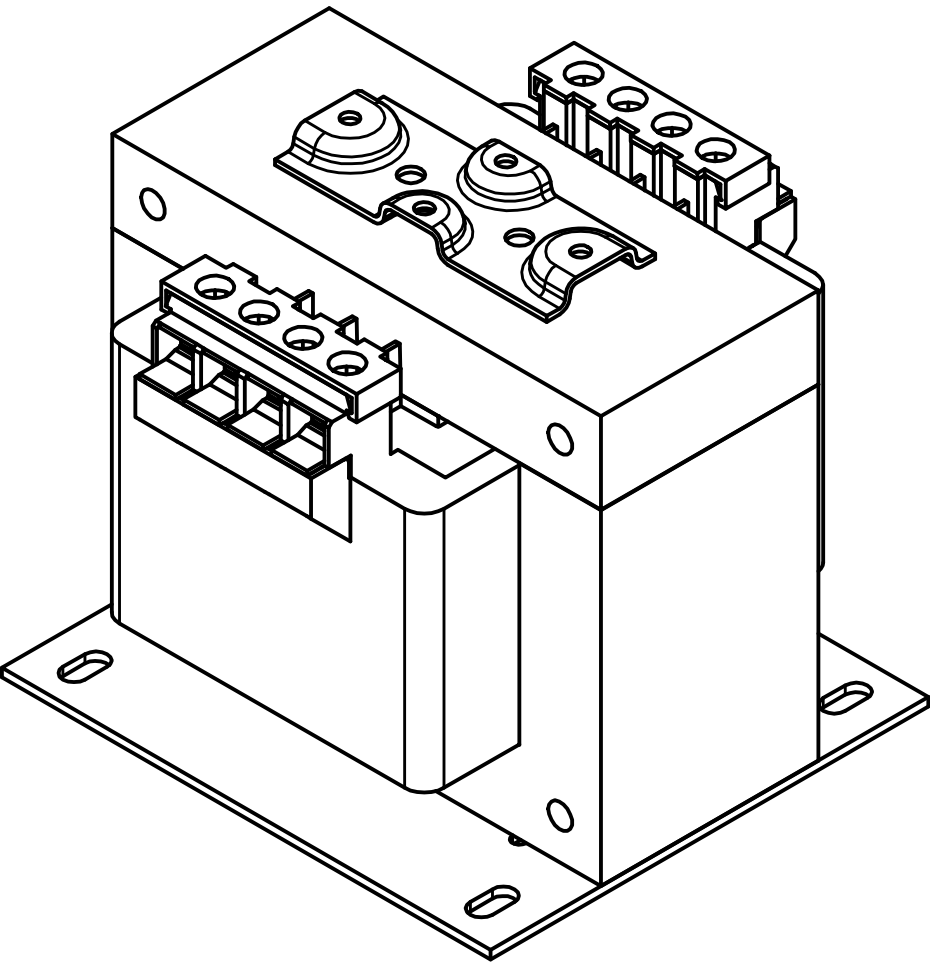

General Specifications	
Rated V.A.	300
Rated Frequency	50/60
Insulation Class	Class 130°C (266°F) Insulation System 80°C (176°F)
Agency Approvals	UL,CUL
Estimated Weight (lbs.)	11.5

Note: For Connection Diagram Please See Catalog 33563

DIMENSIONS IN INCHES (EXCEPT AS NOTED)	THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.						DRN. BY		W132N10611 Grant Drive Germantown, WI 53022 © 2026 Allient Inc.		
							EJB				
		TOLERANCES (EXCEPT AS NOTED)						DATE:	05/07/26	CPT CTL XFMR Frame '7'	
		DECIMAL									
		.XX ± .03 .XXX ± .010									
FRACTIONAL ± 1/32	A		Release		05/07/26	EJB	SCALE:	DRN. NO.	SIZE		
ANGULAR ± 1°	NO	ECO	REVISION		DATE	BY	1:1.25	109947	B SHT.1 OF 1		